BICYCLE PARKING RACK PLACEMENT

HOOP/ U RACK SETBACKS: (INTERIOR LOCATIONS)

Parallel To Wall:


Recommended: 36" Minimum: 24"

Perpendicular To Wall:


Recommended: 36" Minimum: 30"


Rack Spacing:

Recommended: 36"

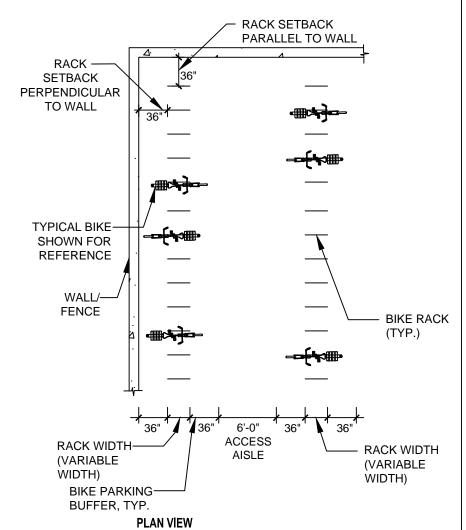

RACK PLACEMENT-SCALE 1"=10'-0"

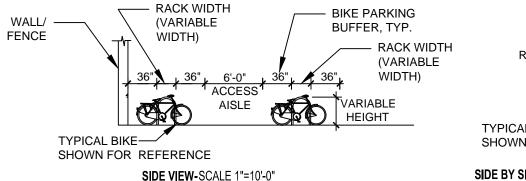



SIDE BY SIDE RACKS-SCALE 1"=10'-0"



Alexandria Department of Transportation and Environmental Services
Bicycle and Pedestrian Program

REVISED:

December 2013

SCALE:

ember 2013 : AS NOTED