



Potomac Yard Urban Design Guidelines

ALTERNATIVE CONCEPT PLAN

Submitted by:
Commonwealth Atlantic Properties

Prepared by:
Cooper, Robertson & Partners
Cunningham + Quill
Oculus
cristopher consultants, ltd.
Wells & Associates

March 12, 1999
Amended on November 13, 2010
Last Revised February 17, 2012



This page intentionally left blank.


Table of Contents

Section 1: Introduction	
Statement of Purpose	3
Site Location	4
Site Context	5
Summary of Site Analysis	6
Section 2: Urban Design Principles	
Site Organization Principles	11
Summary of Design Principles.....	22
Section 3: Development Guidelines	
The Framework Plan	25
Vehicular Circulation	26
Framework Streets	27
Neighborhood Streets	30
Summary of Street Criteria.....	33
Framework Open Spaces.....	34
Summary of Open Space Criteria	41
General Land Use Plan.....	42
The Parcel Plan	43
Parcel Development Standards.....	44
Summary of Parcel Development Criteria.....	51
Infrastructure	52
Section 4: Building Guidelines	
Building Standards and Prototypical Types	55
Townhouses and Stacked Townhouses	55
Small Apartment Buildings.....	60
Large Apartment Buildings.....	62
Mixed-use Apartment Buildings.....	64
Small Office Buildings.....	66
Medium-sized Office Buildings	68
Hotel.....	70
Summary of Building Criteria.....	71

Section 5: Landscape Guidelines	
Streetscape Standards.....	75
Street Trees and Associated Street Plantings	75
Recommended Street Planting List	78
Sidewalk Paving	79
Paving Systems.....	80
Street Lighting and Furniture	84
Wall and Fences	85
Parkscape Standards	86
Park Planting	86
Recommended Park Planting List	88
Path and Trail Paving	89
Park Lighting and Furniture.....	90
Recreation Facilities	91
Section 6: Illustrative Drawings	
Town Center	95
Residential Blocks.....	96
Residential Neighborhoods.....	97
Mixed-use Block Layouts	98
Route 1 Frontage.....	99
Neighborhood Parks	100
Potomac Greens.....	101
Overall Illustrative Site Plan	102
Overall Illustrative Site Section.....	104
Prototypical Development Program	106

This page intentionally left blank.

Section 1: Introduction

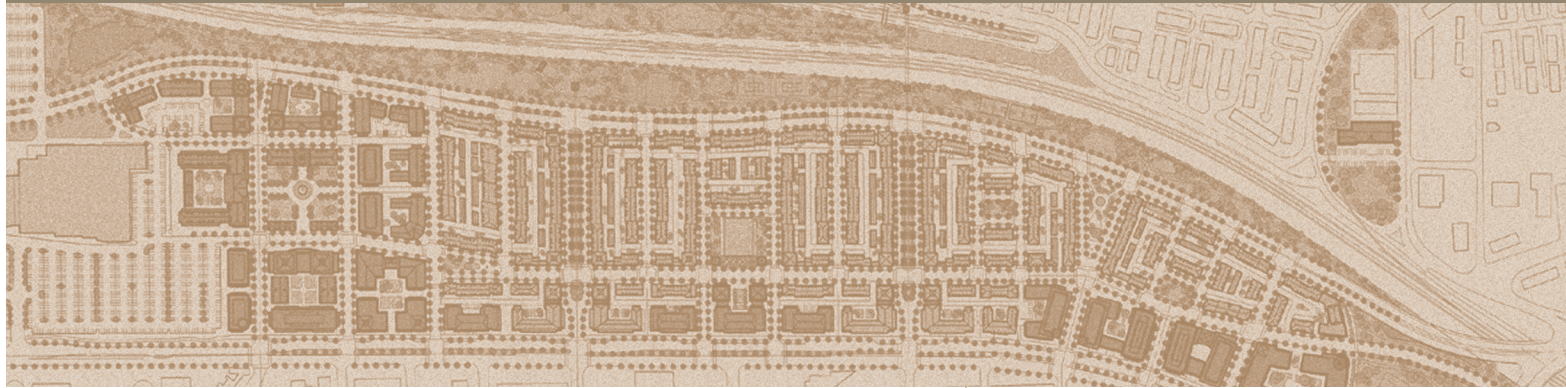

This page intentionally left blank.

Statement of Purpose

The purpose of these guidelines is to ensure a standard of high quality urban and architectural design within the new urban fabric of Potomac Yard. These guidelines are meant to assist members of the community, project developers and city boards and staff, through building an understanding of the important urban design principles that shaped the plan.

Beginning with the site organizing and design principles –

- identifiable neighborhoods and a town center
- a pedestrian-friendly and pedestrian-oriented environment
- a mixed-use development and concentrations of density at key locations
- improvement and enhancement of the Route 1 frontage
- use of open space as a plan defining element including parks in each neighborhood
- development of an orthogonal grid and block pattern
- a hierarchy of street network and types

the guidelines explain the structure of the framework plan, streets and open space and how they apply to each of the proposed development parcels. Dimensioned and delineated street sections, park plans, land-use and

infrastructure descriptions and diagrams identify the plan-defining development requirements. Building and landscape guidelines further address and ensure a high quality environment in the creation of the new neighborhoods, streets, buildings, parks, and open space. Through use and implementation of these guiding principles, a pedestrian-friendly environment will evolve on the Potomac Yard that is founded on the traditional scale and character of the surrounding community context.

These guidelines are written for new development in Potomac Yard, and are to be used as a supplement to the Alexandria City Code. Measurements are made according to standards in Alexandria City Code.

Site Location


Potomac Yard is located in the northeast area of the City of Alexandria and has two main parcels of land, Potomac Yard and Potomac Greens. The property is bounded on the north by Four Mile Run, on the south by Braddock Road, and on the west by Jefferson Davis Highway (US Route 1) from Four Mile Run to Monroe Avenue Bridge. South of the Monroe Avenue Bridge it is bounded generally by properties owned by Virginia Power and the George Washington Middle School. North of Slaters Lane, George Washington Memorial Parkway and the Potomac Crossing Condominiums are directly to the east of the property. Between Slaters Lane and Braddock Road, the property is bounded on the east by the rail corridor. The main body of the Yard and Potomac Greens is separated by a 120 ft. wide easement of active rail corridor. The total property consists of approximately 295 acres of land.



Site Context

Except for Potomac Yard Retail Center, Potomac Yard is primarily surrounded by residential neighborhoods. Lynhaven, Mt. Jefferson, and Del Ray are older residential neighborhoods immediately west of Potomac Yard. Slaters Village is a new residential development just south of Potomac Greens, and Northeast, also a residential neighborhood, is just east of the rail corridors at the southern portion of the site. Braddock Road Metro Station is located east of the rail corridors at the southern tip of Potomac Yard.

These existing neighborhoods, along with other traditional neighborhoods, serve as good precedents for the planning of Potomac Yard. The narrow tree-lined streets, shade trees, and typically orthogonal block pattern are familiar elements that will help create the settings for Potomac Yard.

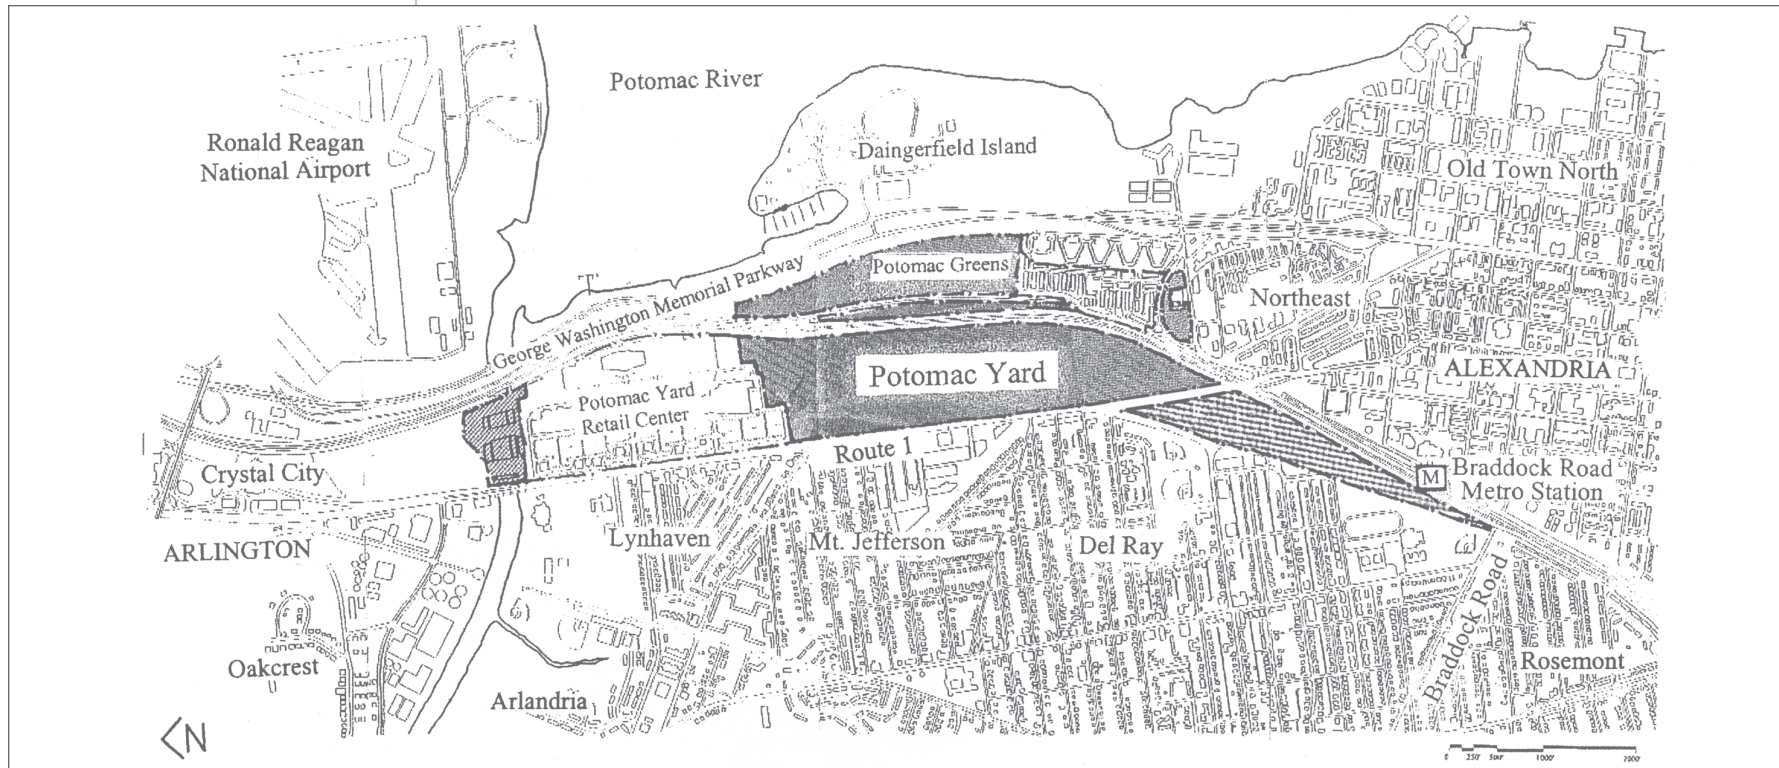

Summary of Site Analysis

1.1 Regional Corridors


The Potomac Yard site is part of a much larger pattern of regional north/south corridors that pass by the site and that help shape this portion of metropolitan Washington. These corridors include the Potomac River itself, the George Washington Memorial Parkway, the Metro and rail corridors, and Route 1. When seen from this point of view, the site is part of a much larger regional traffic, transportation, and infrastructure network which has profound physical impacts for the site and adjacent neighborhoods; more important, this north/south network contributes to the site's most defining characteristic—it's linearity. The linear nature of the site will greatly influence any plan organization for the Yard.



1.1

1.2 Fragmented Pieces of Land

These infrastructure corridors have created a series of land parcels along the Potomac River of immense size and scale. These pieces of land are loosely connected, typically in single ownership, and interrupt the continuous pattern of built-up development within communities along the Route 1 corridor. The sites include: Arlington National Cemetery; the Pentagon; the Airport; East Potomac Park and Dangerfield Island. The Yard is one of the most uniquely shaped sites – a land-locked piece of land three miles long yet only 1,000 ft. wide. As a linear fragment of undeveloped land, the Yard has historically been a barrier to the physical integration of this portion of Alexandria.

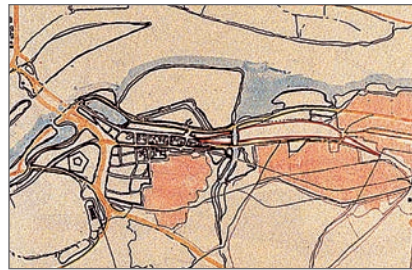

1.2

1.3 East/West Connections


Due to topography, infrastructure, and historical settlement patterns in this area, there are very few regional east/west connections tying inland neighborhoods to the site and the River. Between the Woodrow Wilson and George Mason Bridges, there are only five regional streets which connect to Route 1 from the west: Duke Street, King Street, Braddock Road, South Glebe, and East Glebe. Monroe Street in Alexandria together with 23rd Street in Arlington are the other localized connections. Four Mile Run provides the only other physical link. Identifying the appropriate east/west connections to and through the site will be a planning challenge.




1.3

1.4 Neighborhoods

The site straddles three historic urban settlements each with distinctive street and block patterns, and now built-up urban areas, including: historic Old Town Alexandria, south of the Yard, Del Ray/Mount Jefferson west of the Yard and Virginia Highlands, north of the Yard. The site is essentially where Arlington and Alexandria, the National Airport, Four Mile Run and Dangerfield Island come together. The tension of any plan for the Yard will be one of balance: to link together these urban communities; to accommodate the north/south infrastructure corridors passing by (and through) the site, while creating a "sense of place" for the Yard.

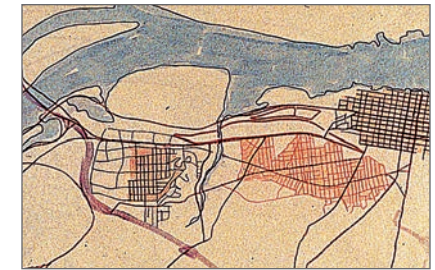

1.4

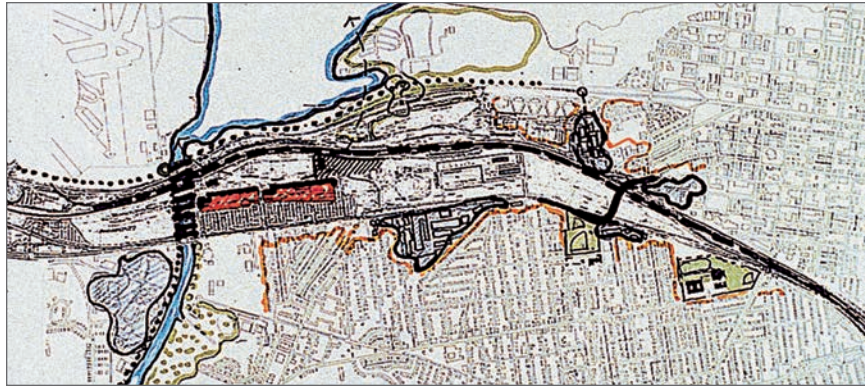

2.1

2.1 Physical Conditions and Constraints

The overall goal of any plan for the Yard should be to make it an integral part of a much larger whole, and to develop seamless connections to the site. However, the existing physical conditions greatly compromise this goal. First, the very shape of the site (being extremely long and narrow) will make it difficult to connect the site from north to south. The physical barriers of Four Mile Run, the Monroe Avenue Bridge, and the Potomac Yard Retail Center all contribute to a fragmented site condition, and portions of the site are much too narrow to develop a neighborhood fabric of streets and blocks. The site, today, is all “edges” with no perceptible “front door” or accessible frontage. The site is isolated from all around it on the north by Four Mile Run and rail bridges, on the east by Metro and rail corridors and George Washington Memorial Parkway, on the west by Route 1 with its strip-like commercial/industrial frontages and south by Monroe Avenue Bridge, rail embankments and Braddock Road. The north/south corridors present formidable physical barriers. The railroad requires a 27 foot high clearance for any connections over the tracks. Route 1 – its traffic volume, speed, and size of roadway – presents another barrier to neighborhood and pedestrian connections. There are few logical connections to existing neighborhoods and the public “centers” of these neighborhoods.




2.2

The costs to transform the character and image of the site from industrial to a mixed use residential community – costs of infrastructure, utilities, streets, parks, etc., will be considerable. There are three planning strategies to overcome these formidable physical disadvantages: 1) connections to existing neighborhoods; 2) an overall site organization based upon walkable neighborhoods; 3) connections to a regional open space network.

2.2 Neighborhood Connections


The surrounding neighborhoods provide physical clues, however, as to how to organize and lay out the site as a new mixed-use community. The organization of the existing neighborhoods (Del Ray, Lynhaven, Mount Jefferson) i.e., their pattern of streets and blocks; important community corridors such as Custis, Monroe, Braddock; other, more localized east/west streets; and residential land-use patterns, can provide local project-serving vehicular, visual, pedestrian, or use connections between the Yard and existing neighborhoods. Essentially, the main body of the Yard can be organized in this way.

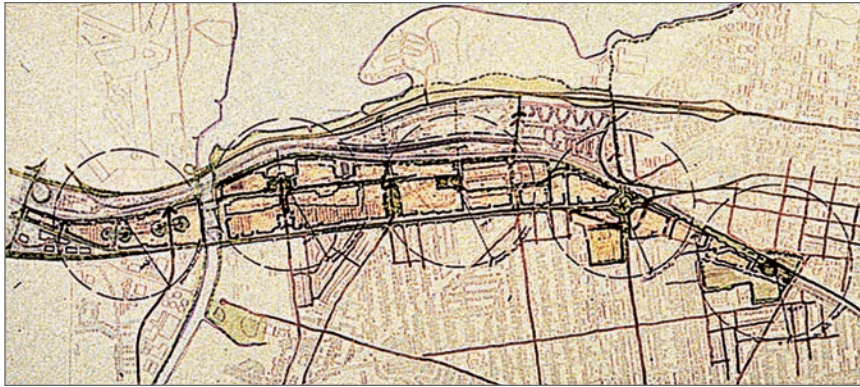

2.3

2.3 Site Organization

The site can be organized about a series of discrete, walkable mixed-use neighborhoods. Each neighborhood would have within a 5-minute walk of its center (1/2 mile diameter) a mix of residential/retail/commercial uses, interconnected by a more localized system of small-scaled streets. Each neighborhood would contain a “center” – whether retail or civic use, a park, or a transit stop. The site could logically become 4-5 neighborhoods: one south of the Monroe Avenue Bridge, and several between the Retail Center and the Monroe Avenue Bridge.

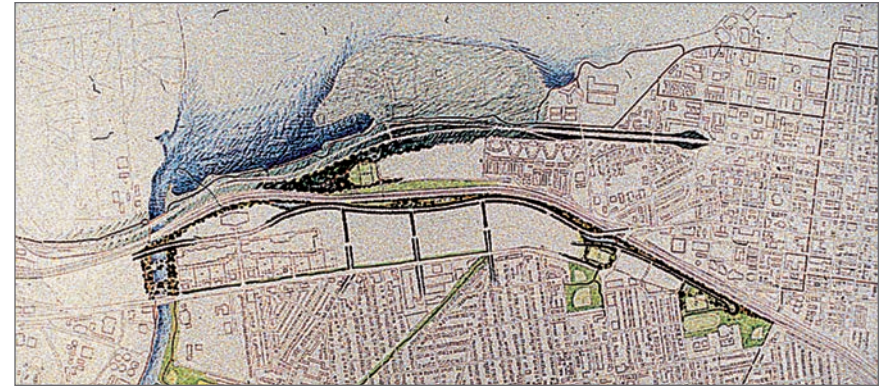

2.4

2.4 A Regional Open Space Framework

A critical component of the plan will be its streets and open spaces within the Yard. However, the linear nature of the site, together with its critical location and size, contribute to its potential role in making important links to existing regional open space and trail networks. To the north, a connection at Four Mile Run to the Mount Vernon trail network, the River, and Dangerfield Island tie the site to a regional system of park spaces. To the south, the expansion of existing park facilities onto the Yard (Simpson Field and George Washington Middle School Fields) provide connections to existing neighborhoods. An internal north/south linear park network could allow for an uninterrupted recreation connection through the Yard from Four Mile Run, under the Monroe Avenue/Route 1 Bridge, to Braddock Road.

Section 2: Urban Design Principles




A series of design principles resulted from site analysis which guide the effort to propose a new future for Potomac Yard. These principles evaluate the Yard's place and role in the City and at a more localized level, what the place should look and feel like within its neighborhoods, pedestrian environment, public access to and experience of the public open spaces.

This page intentionally left blank.

Site Organization Principles


Creating Neighborhoods

Five quarter-mile neighborhoods can be established over the long distance of the site creating compact, pedestrian-friendly, and mixed-use neighborhoods. All of the neighborhoods are connected by a north-south "Main Street" which can serve as a potential transit corridor between each of the neighborhoods and the nearby metro station at Braddock Road. Centrally located in each neighborhood is small convenience retail on Main Street. Each neighborhood has an interconnected street grid. Parks and other civic uses are proposed in each neighborhood as neighborhood amenities. The development of gated communities will not be appropriate or permitted. All the east-west streets terminate their views at the Potomac Yard Park which is at the eastern edge of the site. All residents are within a five-minute walk to a neighborhood center and the Potomac Yard Park.

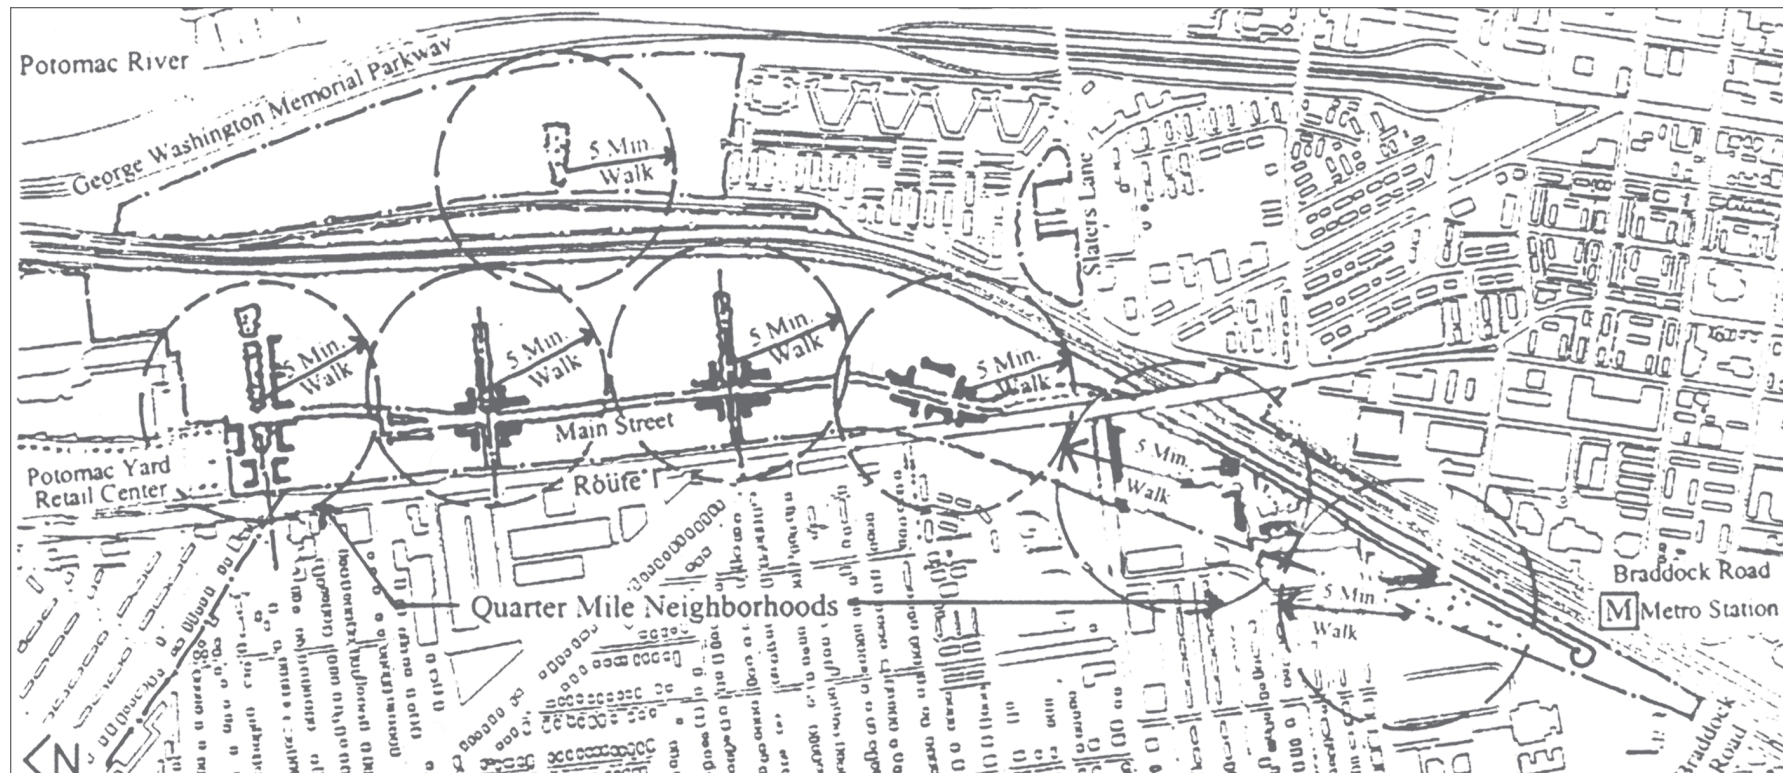

A Mixed-use Development


To ensure an urban character, commercial activities and civic uses are embedded in the neighborhoods, not in isolated and remote locations or built as single-use complexes.

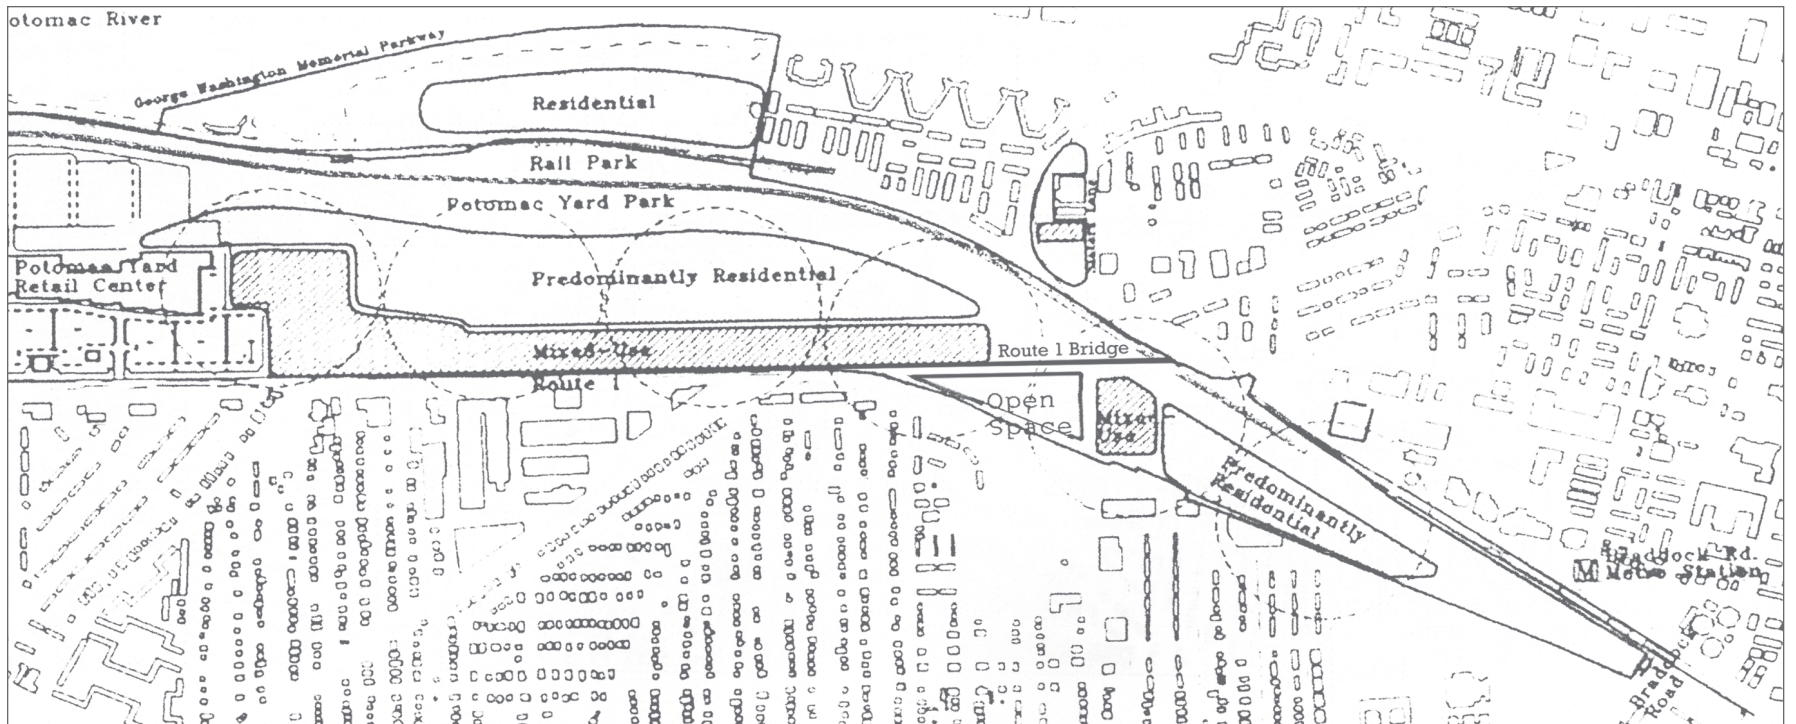

Town Center

The Town Center is to be the identifiable civic center of the community. Its location not only draws upon the success of Potomac Yard Center but also enhances the single-use nature of the Potomac Yard Center by adding a variety of uses. Architecturally, it screens the nondescript nature of the existing retail center, and serves as a gradual transition between that commercial use and the primarily residential neighborhoods to the south.


The primary organizing element of the Town Center is an open space of civic scale and character, such as a plaza or town green. Uses such as retail, hotel, and office surround the open space. The housing density at the Town Center will be higher than in the rest of the neighborhoods. The reserved location of a potential metro station is well within the desirable transit stop walking distance (6 to 8-minutes) from the Town Center.

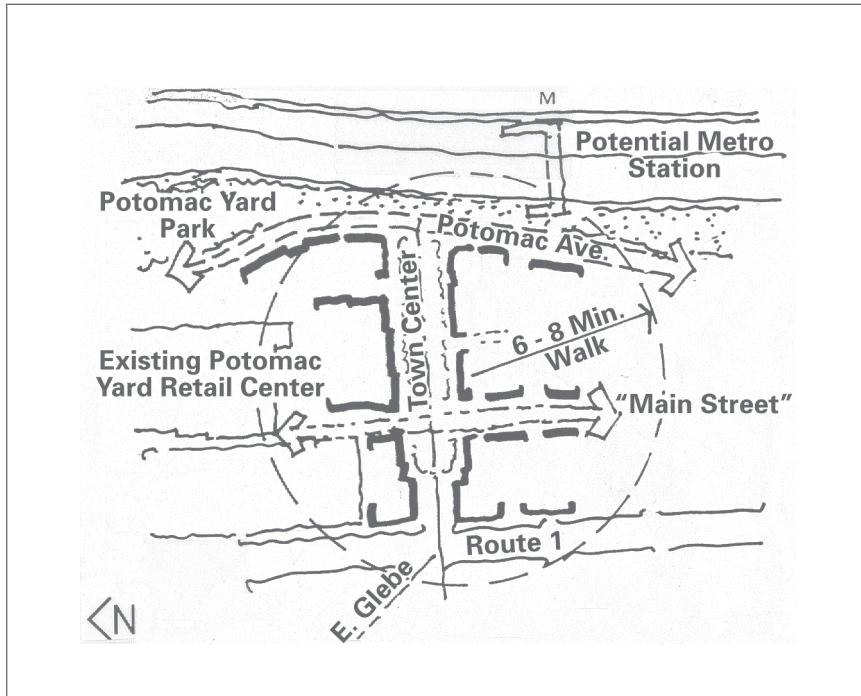

A Hierarchy of Streets


The plan is structured by an interconnected network of streets. Not all streets serve the same purpose and function and not all streets should be the same dimension and character. The primary arterial roads are Potomac Avenue and Route 1. Potomac Avenue is a north-south parkway connecting from just north of the new Route 1 Bridge to Arlington. It is located at the eastern edge of the development to maximize its efficiency due to limited turning movements and to create an address and frontage for the eastern portion of the site. These streets take on citywide roles and become “entry boulevards” to the neighborhood. Their image and character are the first impressions of the neighborhood.

East Glebe Road, Swann, Custis and Howell Avenues are important east-west connections to the neighborhoods west of the Yard. They become the main organizing elements in each of the neighborhoods. Linking neighborhood centers and connecting all the neighborhoods from north to south is “Main Street”. It is scaled for neighborhood functions and encourages pedestrian activities. Smaller residential streets within each neighborhood are oriented east-west as an extension of the existing community west of Route 1 and south of Monroe Avenue. Where possible these streets shall align with those on the west of Route 1. These streets incorporate urban and neighborhood parks to enhance their pedestrian character, and are terminated with views to the Potomac Yard Park at the eastern edge of the site.

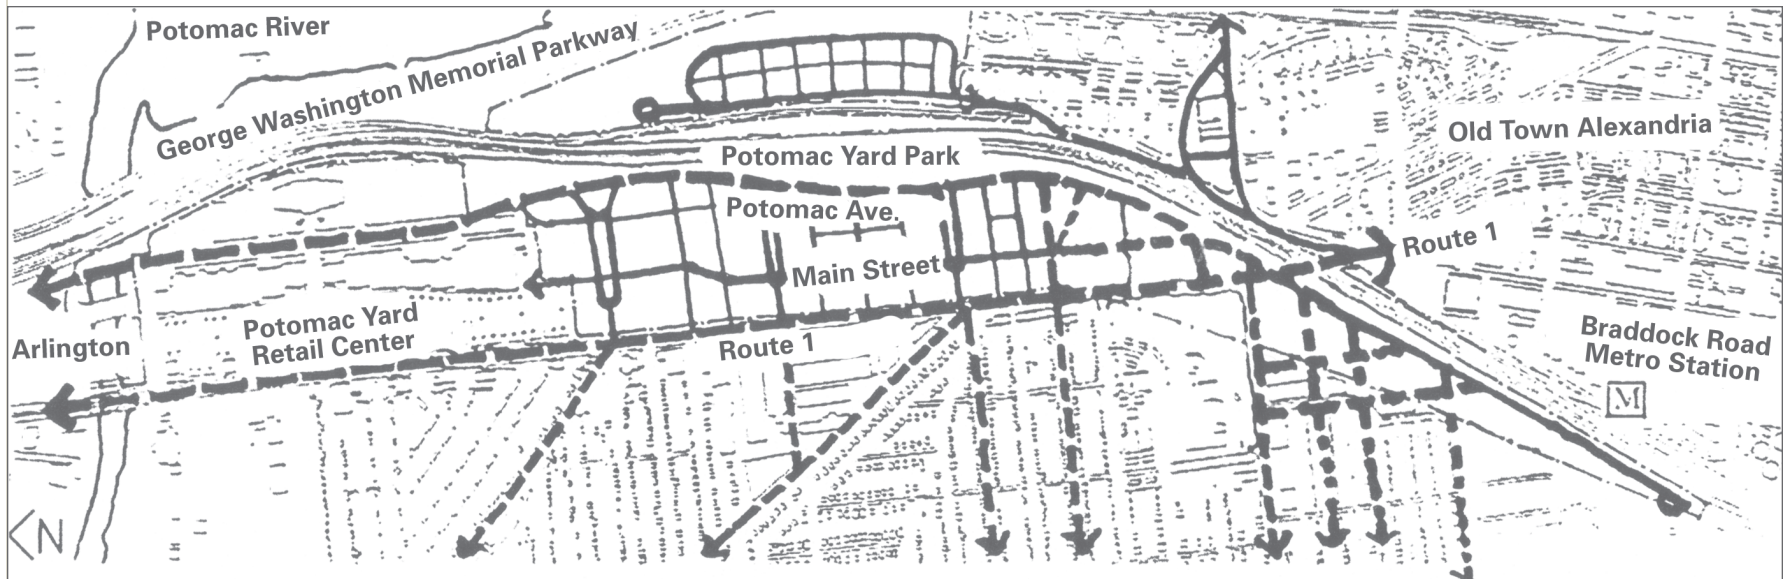


Blocks


Block dimensions are of critical importance because they set up the physical parameters and conditions for any appropriate development. The blocks along Route 1 are organized with the long dimension on Route 1 to provide the opportunity for continuous but varied uses. The interior, primarily residential blocks are oriented east-west to provide continuous frontage on smaller scale residential streets. The blocks in the Town Center are configured to incorporate larger building footprints with a concentrated open space amenity and to conceal parking within the block

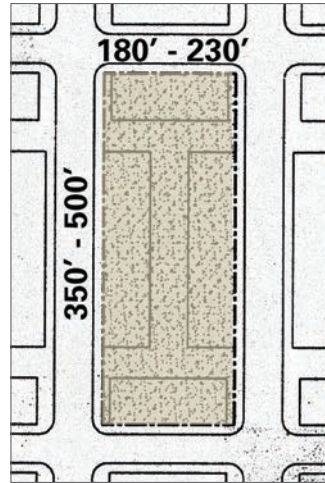


Potomac Yard Block

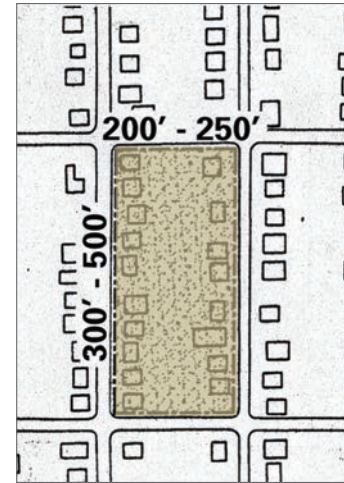

Del Ray Block

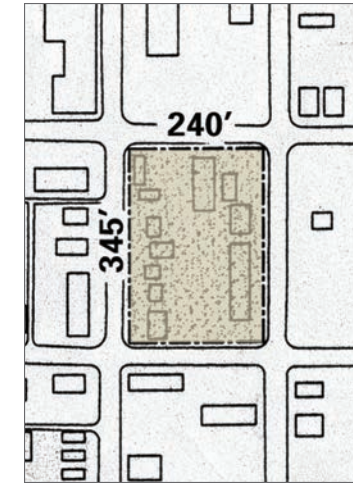

Old Town Block

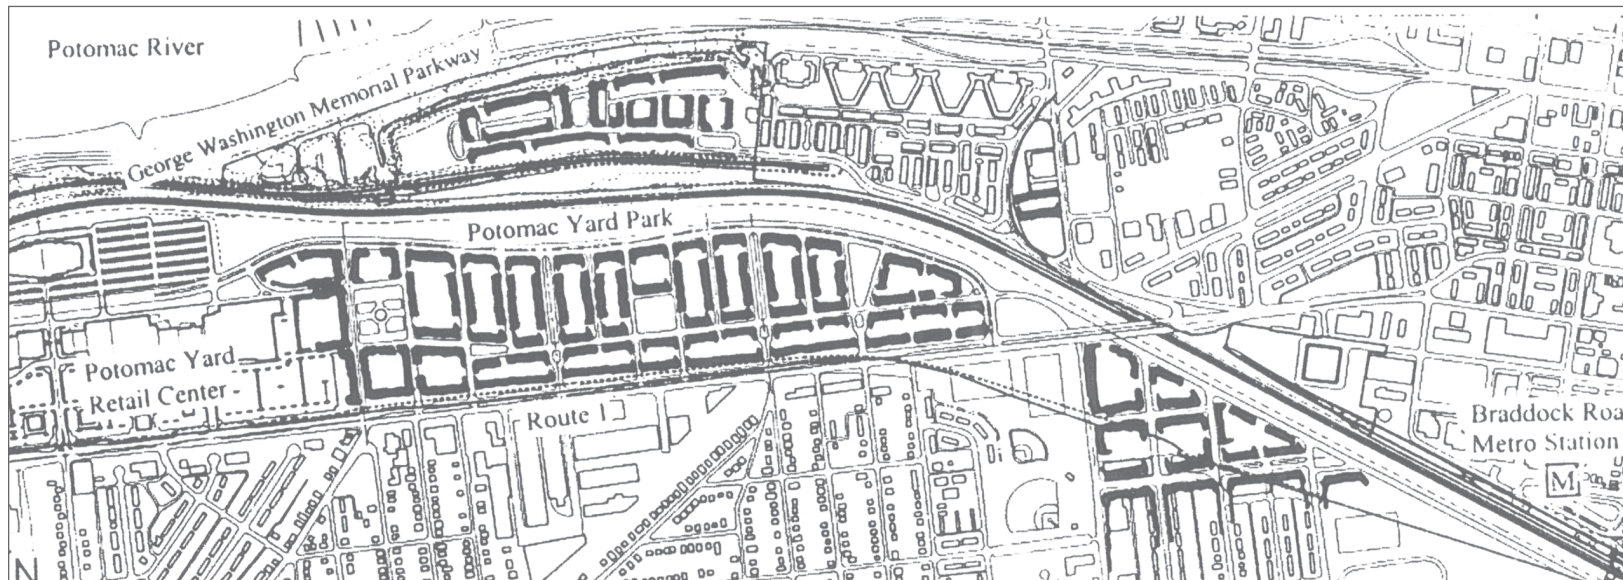

Major Regional Open Space Network


The Potomac Yard Park, varying in width and alongside the rail corridor, provides a major active and passive open space for the region and is connected to the citywide trail system at Four Mile Run and at Braddock Road. It provides an amenity to the City of Alexandria and also enhances the value of the adjacent neighborhoods. The building frontages along the park also provide a greater sense of security for park users within Potomac Yard Park. Several active sports fields are located adjacent to an existing school field, community park, or natural open spaces to enhance or draw from the success of the existing places. A pedestrian bridge over the rail corridor may provide better linkage connecting the Yard to Potomac Greens Park and the regional waterfront park and trail system.






Neighborhood Open Spaces

Neighborhood parks give identity and character to each neighborhood and enhance the value of the development. A variety of size, shape, and use of parks are distributed throughout the site. Centrally located within each neighborhood, they are integrated with the neighborhood centers and the neighborhood streets. They also serve as linkages between the existing community and the regional park system.

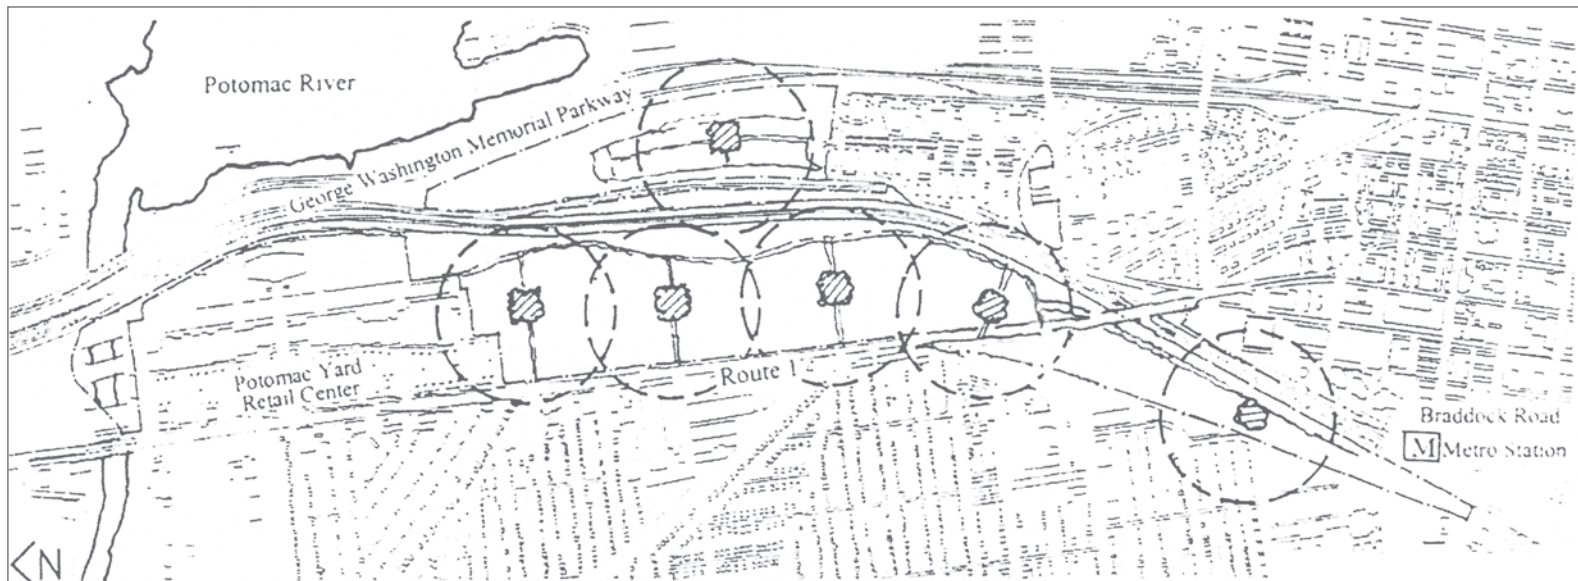

Creating a Pedestrian-Friendly Environment

It is critical to apply familiar dimensions and streetscape elements to each street in order to create a pedestrian-friendly character. Sidewalks should be provided on both sides of each street to facilitate pedestrian circulation. Streets should be provided with shade trees to create a comfortable walking experience. Crosswalks should be provided at all signalized intersections for ease of pedestrian crossing. Width of streets and curb radii should be kept to a minimum to improve pedestrian safety and to slow traffic. Buildings should provide streetwalls and active ground level frontages at the front property line to frame spaces and to provide a sense of enclosure. Ground floor storefronts and entrances should provide visual interest. Squares and parks will provide destinations and stopping points along the path of pedestrian circulation routes.

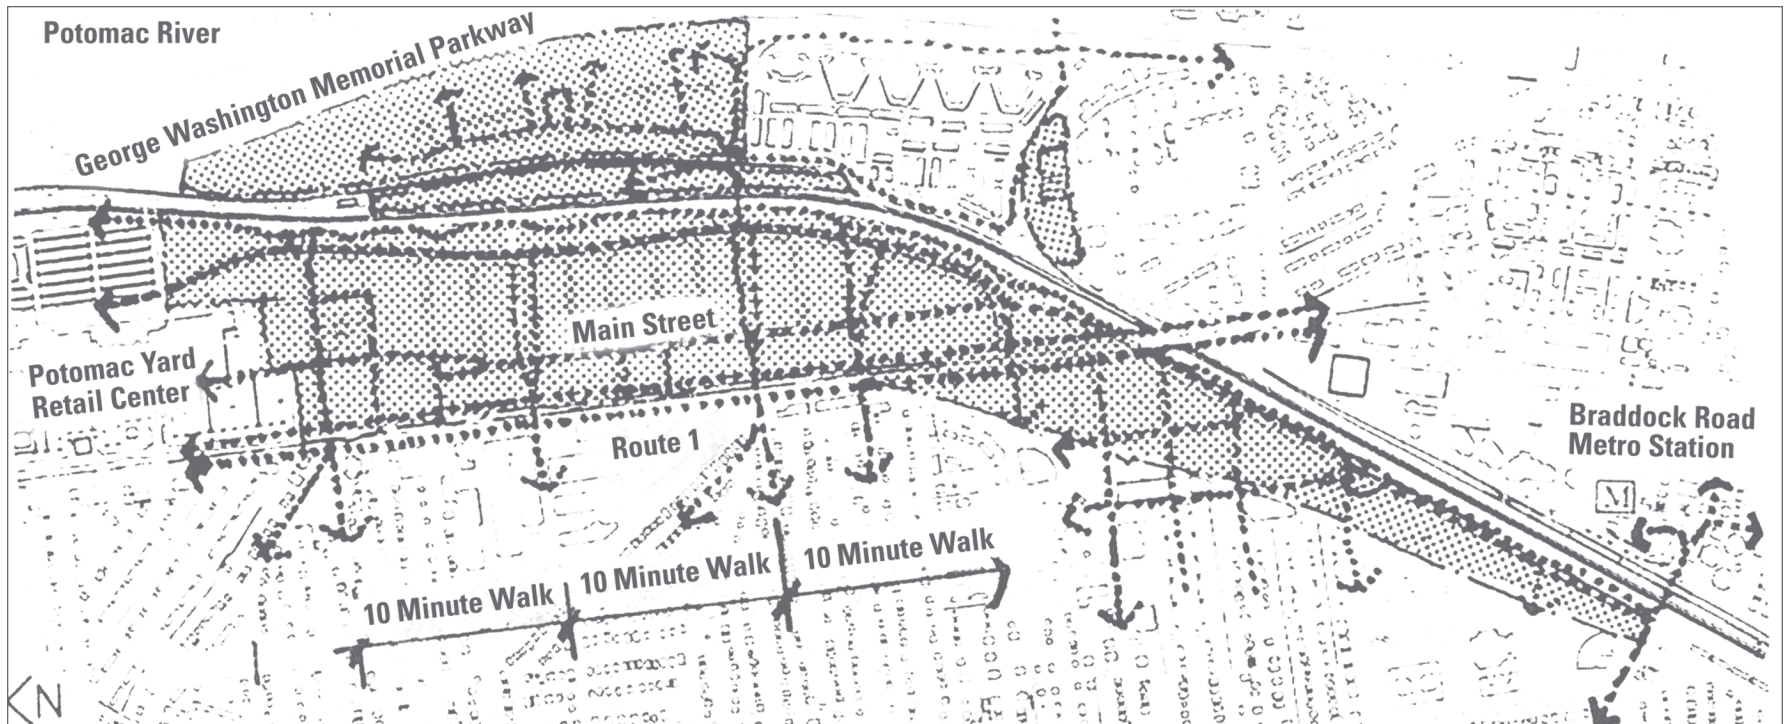



Existing Conditions

Improve and Enhance Route 1 Frontage


Rebuilding the Monroe Avenue Bridge as a straight connection across the rail corridor will not only improve the flow of traffic on Route 1 but also will allow development of traditional orthogonal blocks to occur near the new bridge, integrating the new development with the existing neighborhoods. As a major entrance into the city, the image of Route 1 can be improved by establishing streetscape and building criteria beginning with Potomac Yard's frontage. Over time, similar changes can occur on the west side of the street, bringing together the Yard and the adjacent neighborhoods. A consistent streetwall will provide a sense of continuity and enclosure, and a variety of uses will ensure the overall urban character. Lay-bys, sidewalks and planting will improve the pedestrian experience and provide an overall sense of unity. Automobile-oriented retail, such as drive-through commercial, auto sales, and "big box" retail should be strongly discouraged along this frontage. Detached signs and billboards that are typical of highway corridors shall not be permitted.



Density and Massing


Three locations in the site offer the opportunities for higher density and taller buildings. In the Town Center, office buildings up to 110' (approximately 8 stories) are grouped to create a focal point for the community. These buildings also provide the sense of enclosure for the civic open space in the Town Center.

Commercial office and higher density residential buildings may also be located near the Braddock Road Metro Station to maximize transit opportunities. Along Route 1 near Monroe Avenue and fronting on major open spaces is yet another place for higher density and taller buildings to ensure an urban character and quality.

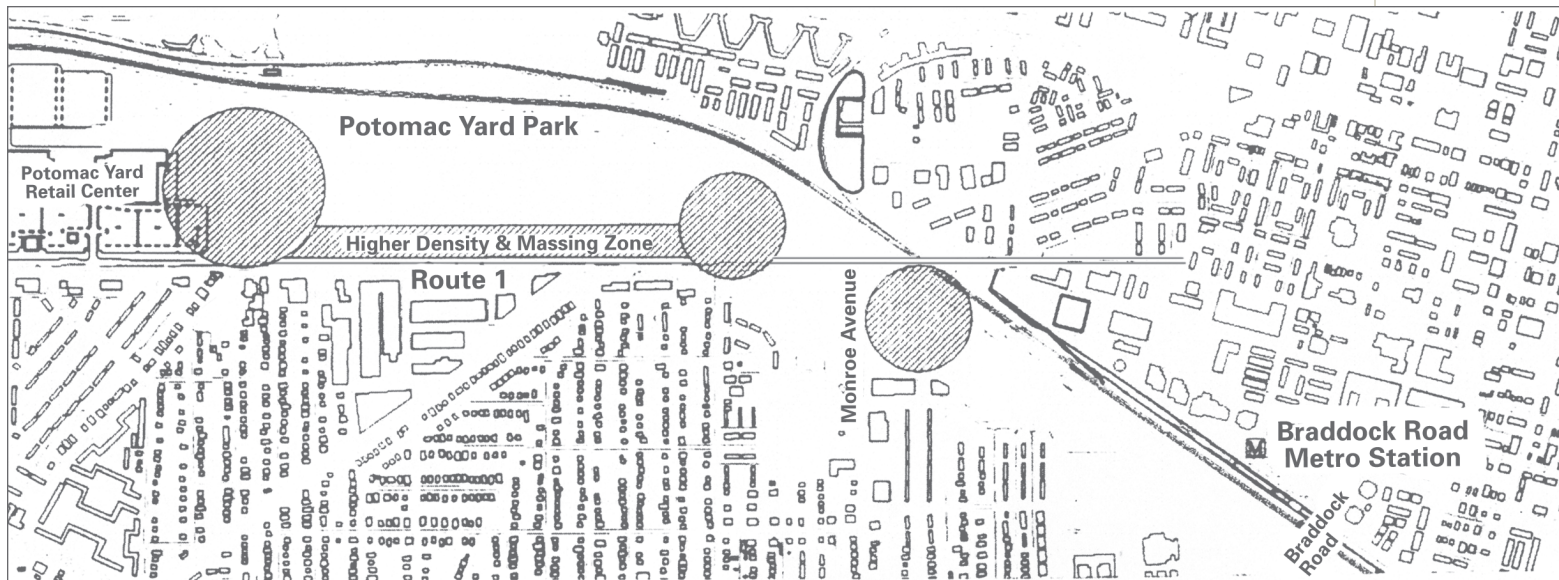


A Variety of Uses and Building Types

A variety of uses and building types strengthens community interaction and keeps the neighborhood viable day and night. In the Town Center, building types include hotel, office, retail, and higher density residential. In each residential neighborhood, there is a mix of housing types, including townhouses, stacked townhouses, apartments of various sizes, and small scale neighborhood centers with retail serving the local community.

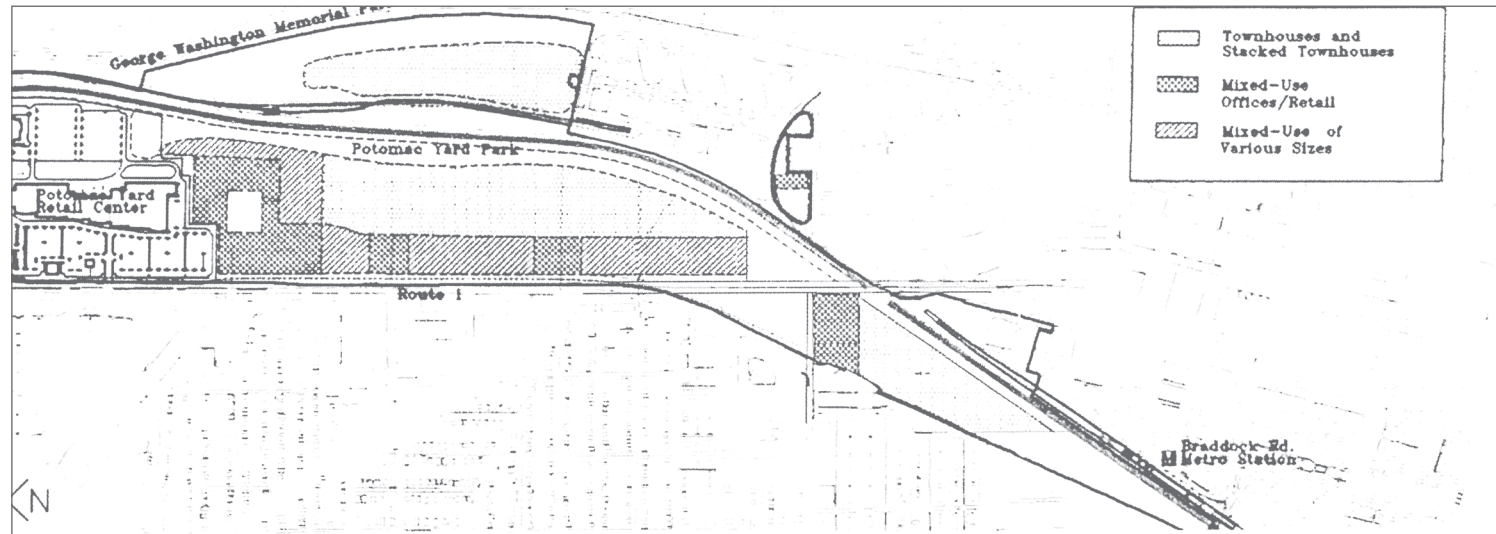


Summary of Design Principles

- Create compact, pedestrian-friendly, mixed-use neighborhoods.
- Provide one mixed-use Town Center as the discernible focal point of the community.
- Concentrate commercial and civic activity in addition to higher density residential use within the Town Center.
- Distribute a variety of parks, from regional open space and village green to neighborhood pocket parks, throughout the plan.
- Provide regional parks to serve the larger community and connect to the citywide system of open spaces and natural corridors.
- Place neighborhood open spaces evenly throughout the development within walking distances of all residents.
- Organize the site by a modified orthogonal grid of interconnected streets.
- Scale the blocks appropriately to be an extension of the existing adjacent neighborhoods.
- Use major streets to connect the neighborhoods, provide the venue for transit opportunities, and adequately accommodate project-serving automobiles.
- Configure residential streets to be safe, comfortable, and encourage walking.
- Where appropriate, use through-block pedestrian alleys for connections to adjacent communities.
- Provide service to residential garages or parking facilities by a network of alley systems.
- Mix a variety of uses and building types within the neighborhoods.
- Locate higher density commercial and residential uses near existing and potential transit stations, and taller buildings along major street corridors.

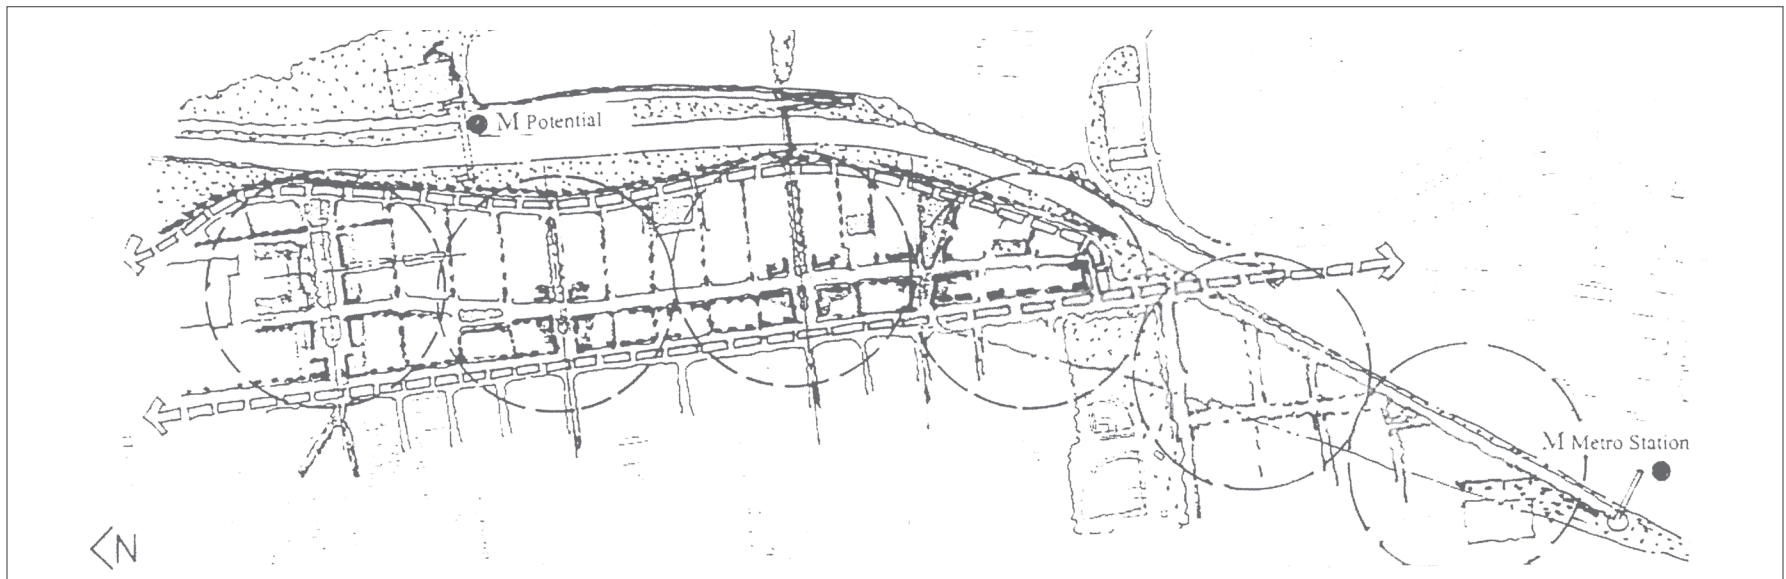

Section 3: Development Guidelines

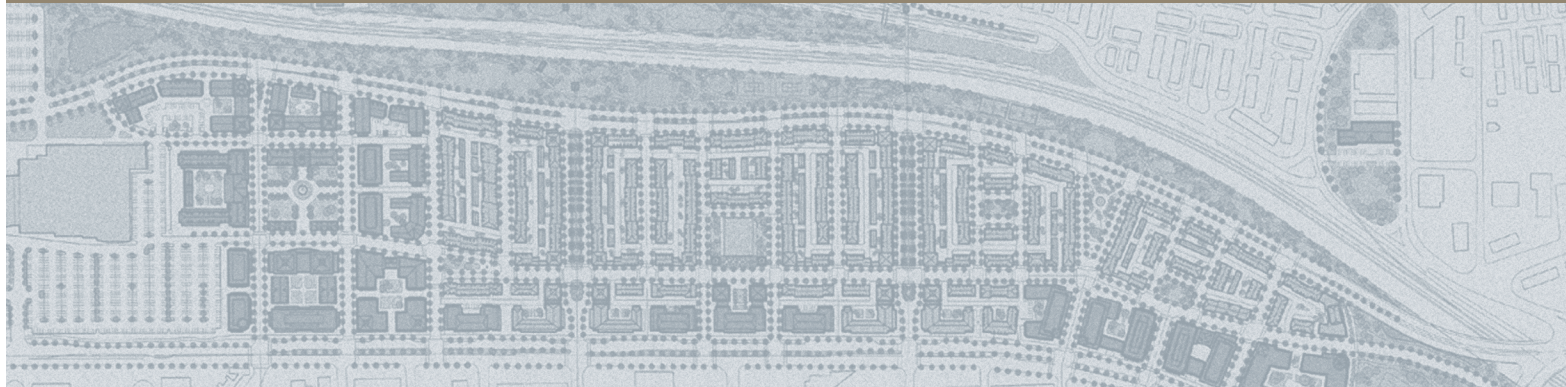

Potomac Yard is intended to be built over an extended period of time and by many different entities. In order to achieve the goals outlined by the design principles, this long-term build-out calls for a coordinated approach to planning of streets, parks, infrastructure, and the designing of the buildings.

The development guidelines are a set of rules and criteria for those elements critical to achieving the goals set out by the design principles. They include street design, i.e., dimensions, character, and material; open space intent, character, and criteria; and parcel development criteria including block sizes, dimensions, neighborhood park requirements, and general building height, massing, frontage and orientation.


This page intentionally left blank.

The Framework Plan

The basic organization of the site is structured by the Framework Plan. It locates major arterial streets and regional open spaces. Potomac Yard Park is located alongside the entire length of the rail corridor from Four Mile Run to Braddock Road. Potomac Avenue parallels Potomac Yard Park and serves as the spine road connecting Route 1 from the Route 1 Bridge to Arlington.

East Glebe Road, Swann, Custis and Howell Avenues are important access points into the site, which are also east-west neighborhood connections across Route 1. Improvements on the east side of Route 1 are an important part of the framework plan as they unify the Route 1 frontage and enhance its image.

South Main Street provides access to the southern portion of the site, and ends at a vehicular turn-about with pedestrian connections to the Braddock Road Metro Station via Braddock Road.

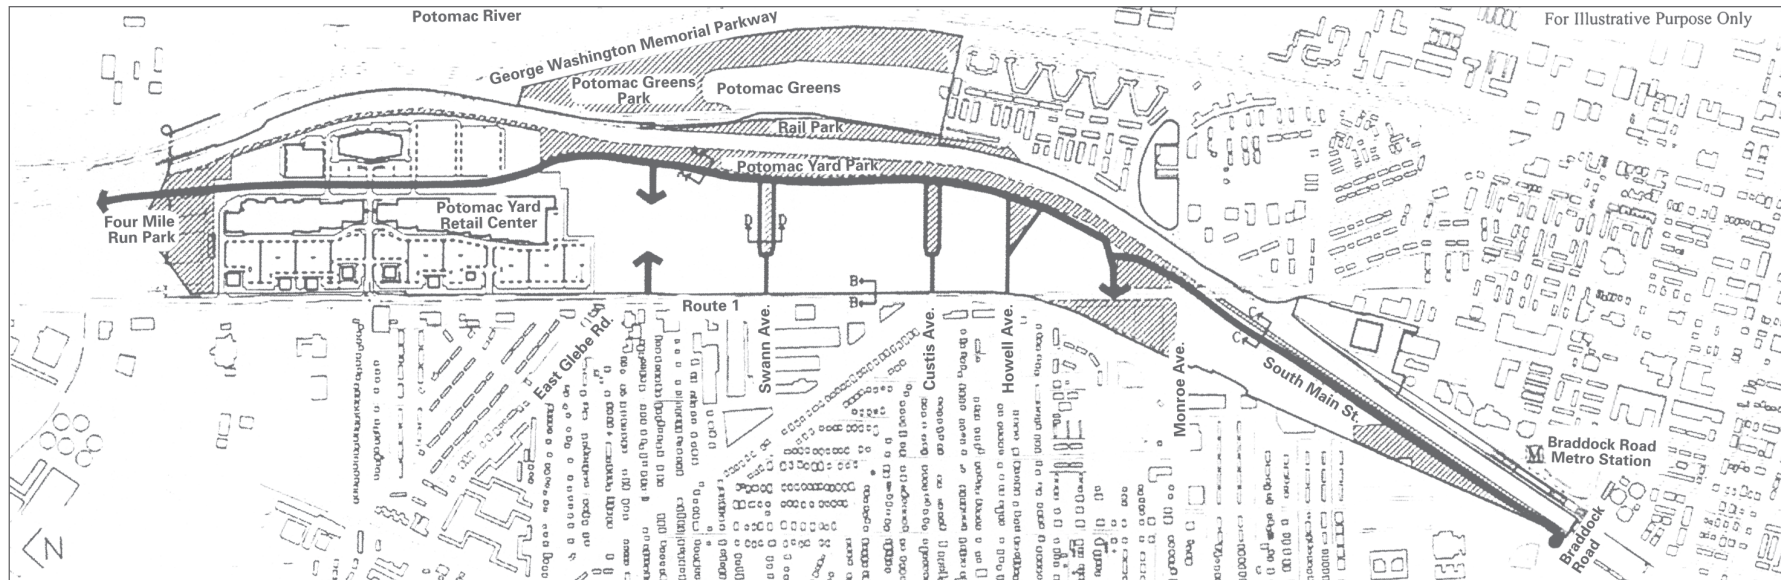


Vehicular Circulation

The primary north-south arterial roads serving Potomac Yard are Potomac Avenue and Route 1. Route 1 connects the site to Old Town Alexandria to the south and Crystal City in Arlington to the north. These two roads in conjunction with the framework streets and the east-west neighborhood streets form an interconnected network of streets which serves the development. The road network is configured to calm traffic and favor the pedestrian in order to achieve the desired urban quality.

In addition to East Glebe, Swann, Custis, and Howell, there will be multiple points of signalized intersections along Potomac Avenue, providing pedestrian crossings and left turn lanes for north bound traffic. "Main Street", a major road connecting each development parcel, is the hub of neighborhood activities and the transit corridor between neighborhoods and the nearby Braddock Road Metro Station.

South Main Street provides access to development sites south of Monroe Avenue. At the southernmost end of South Main Street, there will be a vehicular turn-about and a pedestrian drop-off for the Braddock Road Metro Station.



East Glebe Road, Swann, Custis, and Howell Avenues are full service intersections for entry and egress from Route 1 and Del Ray. The existing left turn lanes for north-bound traffic on Route 1 will remain.

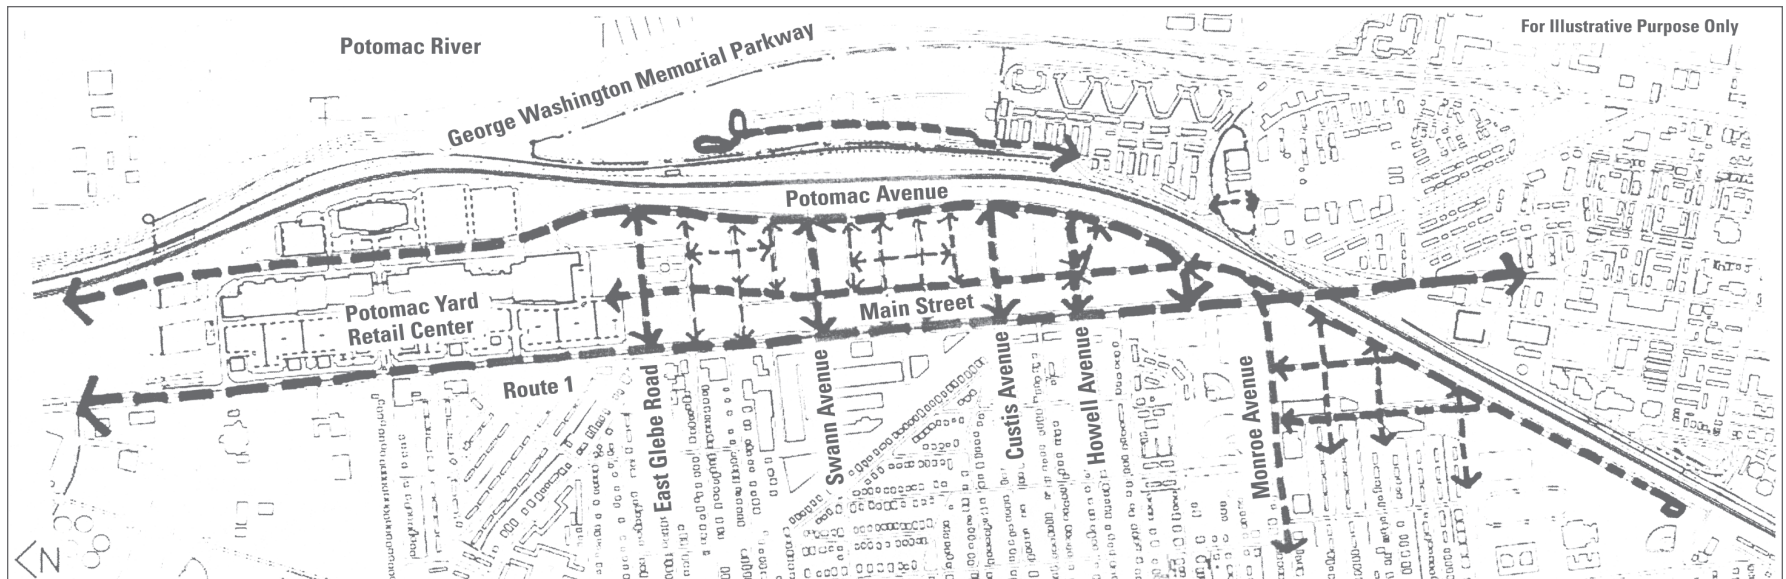

Framework Streets

Potomac Avenue
(Section A-A looking north)

Curvilinear in alignment and park-like in character, Potomac Avenue has two lanes in each direction with a landscaped median providing left-turn lanes at selected intersections but, at a minimum, at East Glebe Road, Swann, Howell and Reed Avenues. On-street parking, sidewalks and street trees will be provided on the west side (building side) of the street. There shall be no curb cuts from Potomac Avenue into individual properties, except for alleys or access to parking garages for mixed use development between Swann Avenue and Bluemont Avenue*. Refer to the Streetscape Standards for street tree, sidewalk, lighting, and site furniture standards.

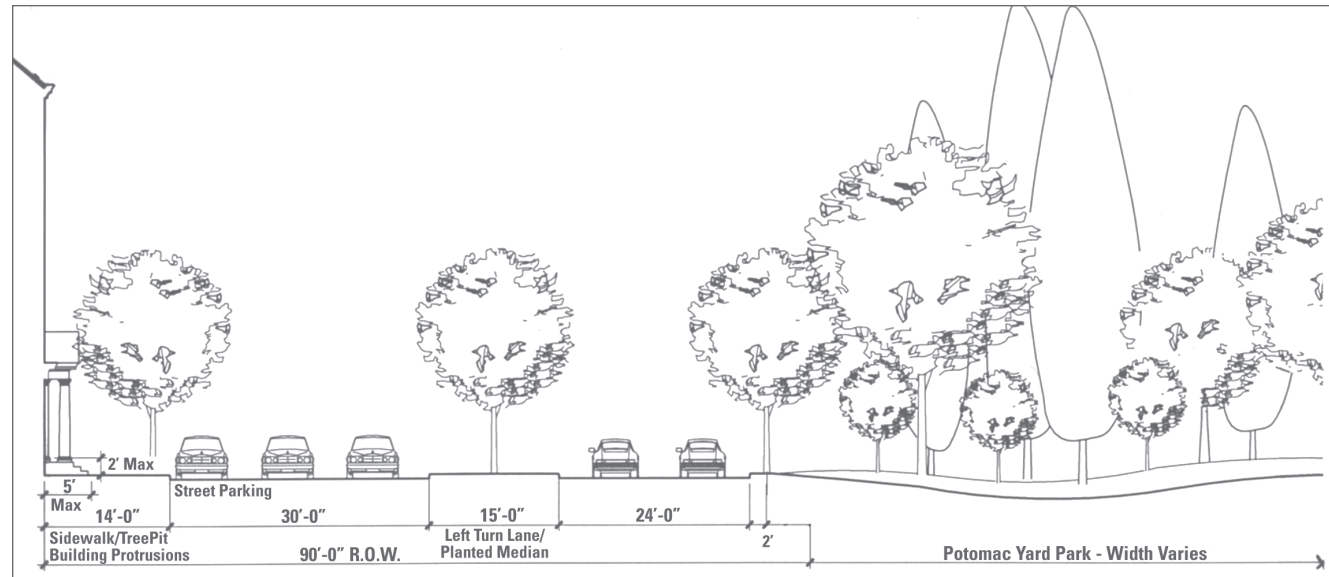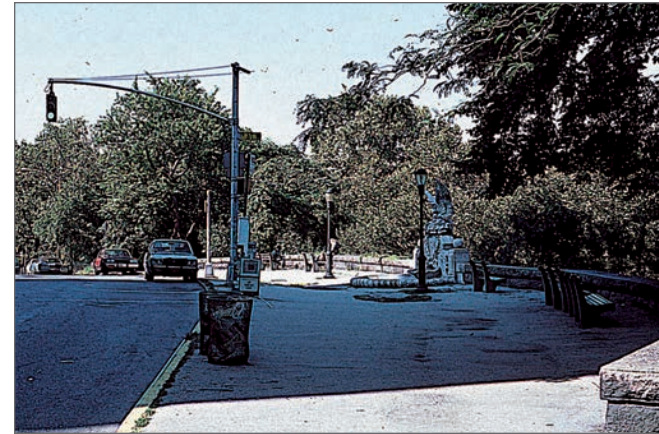


Section A-A Looking North

* Amended November 13, 2010

Route 1 Improvements
(Section B-B looking north)


Improvements of Route 1 on the east side include a landscaped center median with left-turn lanes from East Glebe Road south to Monroe Avenue. Protected left turns will be provided at Howell, Swann and East Glebe Road; these intersections will operate as full intersections. The design of the remainder of the intersections along Route 1 shall be designed to the satisfaction of the Director of T&ES, in consultation with the adjoining neighborhoods. In any case, full access shall be maintained for emergency vehicles at Windsor. New sidewalks will be provided on the project side of Route 1. Street trees will be provided in the center medians and in front of the buildings. There shall be no curb cuts from Route 1 into individual properties. Lay-bys will be permitted as approved by the City. Refer to the Streetscape Standards for street tree, sidewalk, lighting, and site furniture standards.

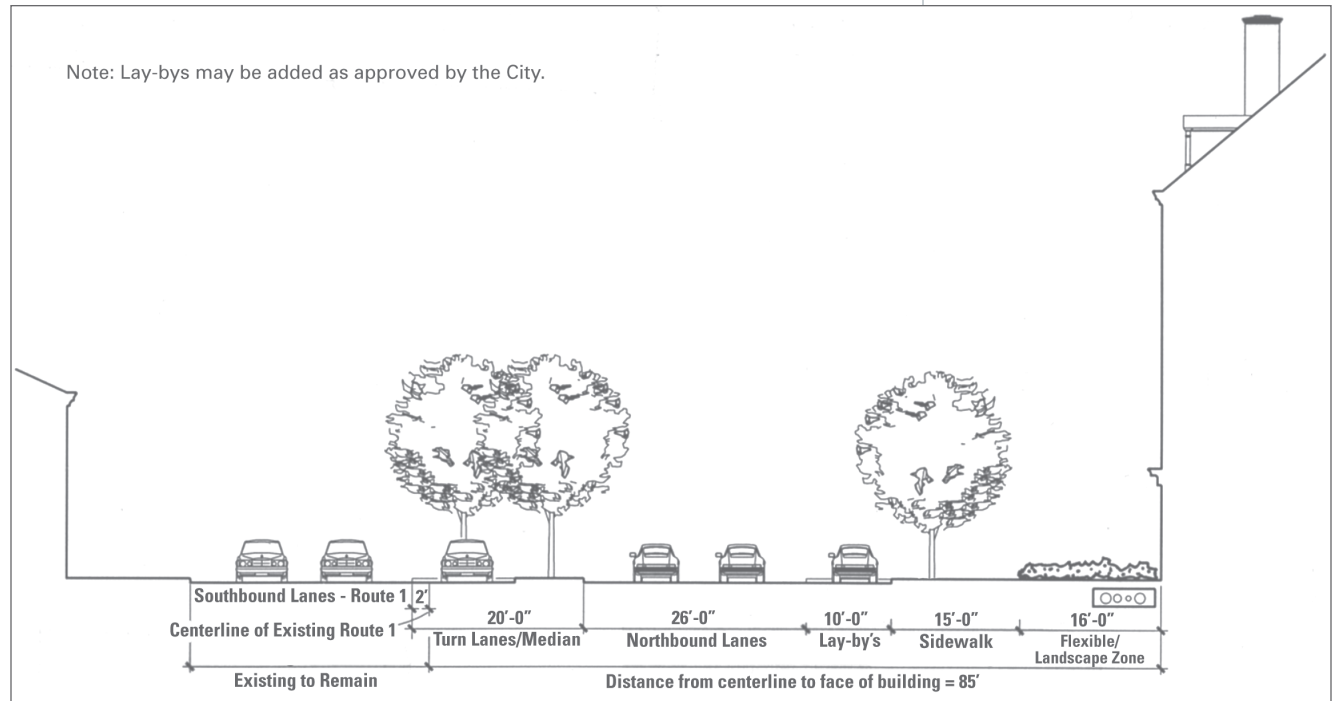

Section B-B Looking North

South Main Street (Section C-C)


South Main Street provides access to the southern portion of the site. At the end of South Main Street is a vehicular turn-about which serves as a pedestrian and transit connection point to the nearby Braddock Road Metro Station. Due to the higher density of commercial and residential proposed at this location, this street has two lanes in each direction, with the second lane serving as on-street parking during off-peak hours. Refer to the Streetscape Standards for street tree, sidewalk, lighting and site furniture standards.

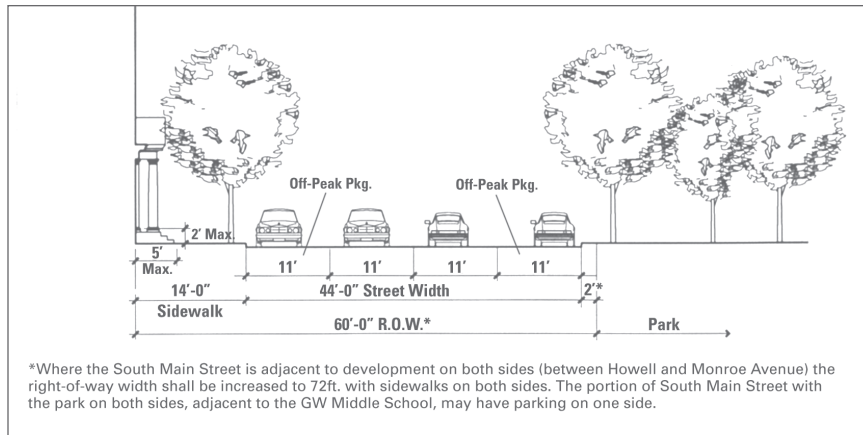

Section C-C

East-West Streets (Section D-D)

East Glebe, Swann, Custis, and Howell are extended into the site from the neighborhood across Route 1. Designed to engage open spaces and encourage pedestrian usage, each street has a green space as part of the street, as if Potomac Yard Park extended several "fingers" into the site. The roadways are one-way with on-street parking on the building side around the green spaces. Refer to the Streetscape Standards for street tree, sidewalk, lighting and site furniture standards.

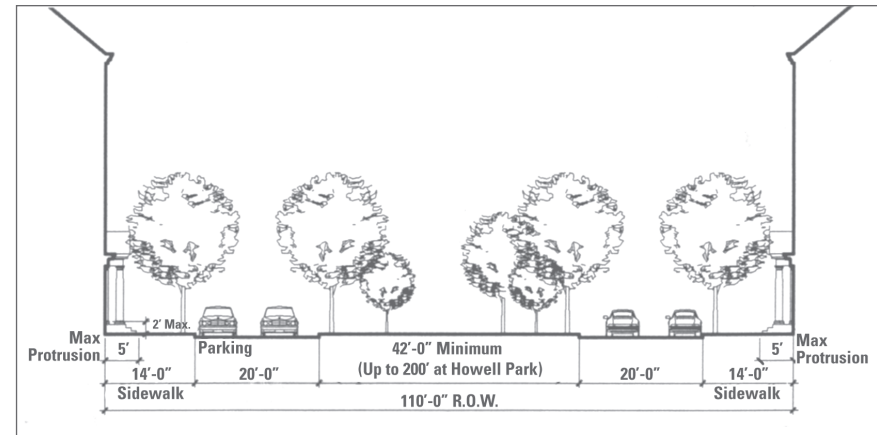


Section D-D



Neighborhood Streets

Main Street


Main Street is the primary neighborhood connector street. It is mainly for north-south movement through each parcel. It serves as the transit corridor for the entire community, linking residents and tenants to points of interest and the Braddock Road Metro Station. It is intended to be a traditional “main street” with neighborhood-scale ground floor retail encouraging pedestrian activity and use. Continuous sidewalks and street trees are provided. Refer to the Streetscape Standards for street tree, sidewalk, lighting and site furniture standards.

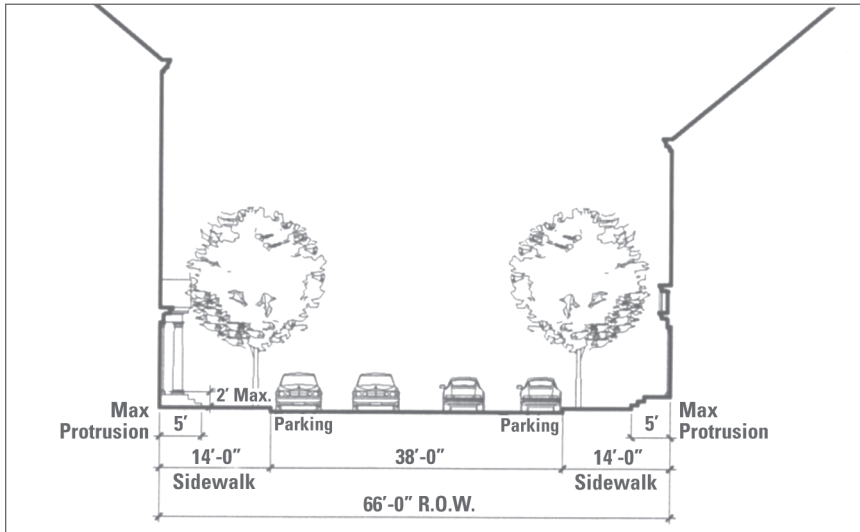



Typical Residential Street

Typical residential streets establish the fine-grained street network of each neighborhood. They are mainly for east-west movement between Main Street and Potomac Avenue and limited locations on Route 1. These streets are designed to be slightly narrower than City standards to ensure slow vehicular movement and to favor the pedestrian. Continuous sidewalks and street trees are to be provided. Refer to the Streetscape Standards for street tree, sidewalk, lighting, and site furniture standards.


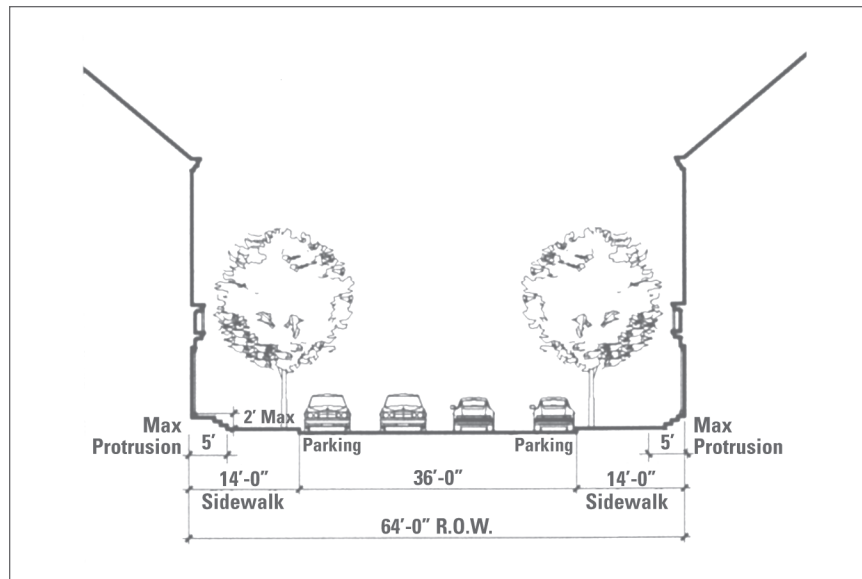


One-way Street


One-way streets are used around neighborhood parks as extensions of the open spaces. Continuous sidewalks and street trees are provided. Crosswalks will be provided to access the open space. Refer to the Streetscape Standards for street tree, sidewalk, lighting, and site furniture standards.

Alley

The network of alleys allow for the fronts of properties to be free of curb cuts and garage doors. Alleys are typically 24ft in width with 22ft of continuous pavement. In between each garage entry, there is a one foot wide planting strip to be maintained by the house owners. Refer to the Streetscape Standards for street tree, sidewalk, lighting, and site furniture standards.

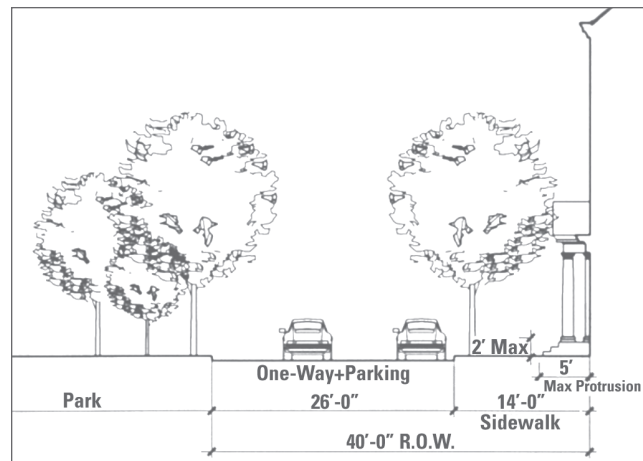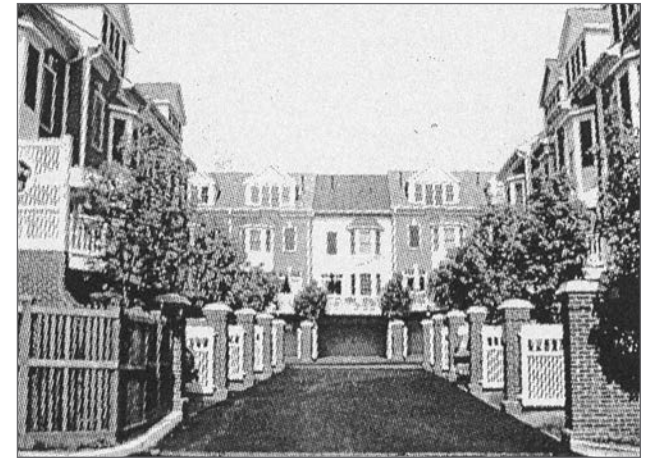

*Pavement and R.O.W. width for this street type may be reduced if approved by T&ES.

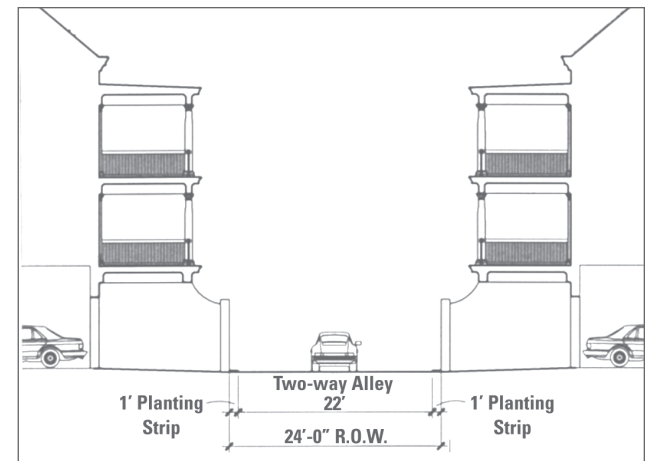

*One-way alleys, with a minimum pavement width of 18ft and easement width of 20ft, shall be permitted where approved by T&ES.

Summary of Street Criteria

Some streets in the proposed development are made slightly narrower than the Alexandria City Standards to capture one of the great elements of traditional neighborhoods in the Old Town Alexandria area. All streets are designed to favor the pedestrian, calm vehicular speed, and correspond to the characteristics and the scale of the buildings fronting on that street. The street criteria will be a supplement to the City of Alexandria Planning and Development Code. No curb cuts shall be permitted on Route 1 or Potomac Avenue into individual properties.

	Potomac Avenue	Route 1	Main Street	South Main Street**	Typ. Residential Street	One-Way Street	Alley***
Vehicular Movement	Two-way	Two-way	Two-way	Two-way	Two-way	One-way	Two-way
Movement Pattern	Medium	Medium	Slow	Slow	Slow	Yield	Slow
No. of Travel lanes	4 + left turn	4+left/right turns	2	4	2	1	1
Design Speed	25-35 mph	35 mph	20-25 mph	20-25 mph	15-25 mph	10-15 mph	5-10 mph
Right of Way	90'	variable	66'	60'	64'	40'	24'
Pavement Width	54'	variable	38'	44'	36'	26'	22'
Median Width	15'	20'	-	-	-	-	-
Sidewalk Width*	14' (Bldg. Side only)	24' (Bldg. Side only)	14' min.	14' (Bldg. Side only)	14' min.	14' (Bldg. Side only)	N/A
On-Street Parking	Bldg. Side only	Lay-bys	Both sides	Off peak	Both sides	Bldg. Side only	
Striping	Yes	Yes	Yes	Yes	No	No	No
Curb Type & Radius	Raised, 25'	Raised, 25'	Raised, 20'	Raised, 20'	Raised, 15'	Raised, 15'	No curb, 10'
Street Trees	35' o.c.	35' o.c.	35' o.c.	35' o.c.	35' o.c.	35' o.c.	N/A

* All sidewalk widths include 4 ft. wide tree wells and a maximum 5 ft. area adjacent to buildings where encroachment and planted areas may be approved.

** Where development occurs on both sides of South Main Street, the right-of-way width shall be a minimum of 72ft. and sidewalks shall be provided on both sides. Where South Main Street is adjacent to GW Middle School, parking may be provided only on one side.


*** Narrower (20 ft. easement, 18 ft. pavement) one-way alleys may be provided in some locations if approved by T&ES.

Framework Open Spaces

The Open Space Parcels

At Potomac Yard, open space, along with transportation, street network, land use, and density are the primary components that drive the design. Open Space at Potomac Yard is planned to be a collection of green spaces connected by pedestrian trails, street sidewalks and walkable green spaces. They are linked within the Yard, and linked to the existing regional system. Active recreation fields are located adjacent to existing school or natural open spaces.

Matching community needs, the plan offers a variety of open spaces including passive parks, linear parks, and urban plazas. In addition to the Framework Open Spaces, design guidelines for each of the open space parcels, such as the Town Green and those within individual development parcels are established to guide the design of these parks. Some of the criteria include minimum dimensions, intent of character and use, and percentage of active and passive spaces.

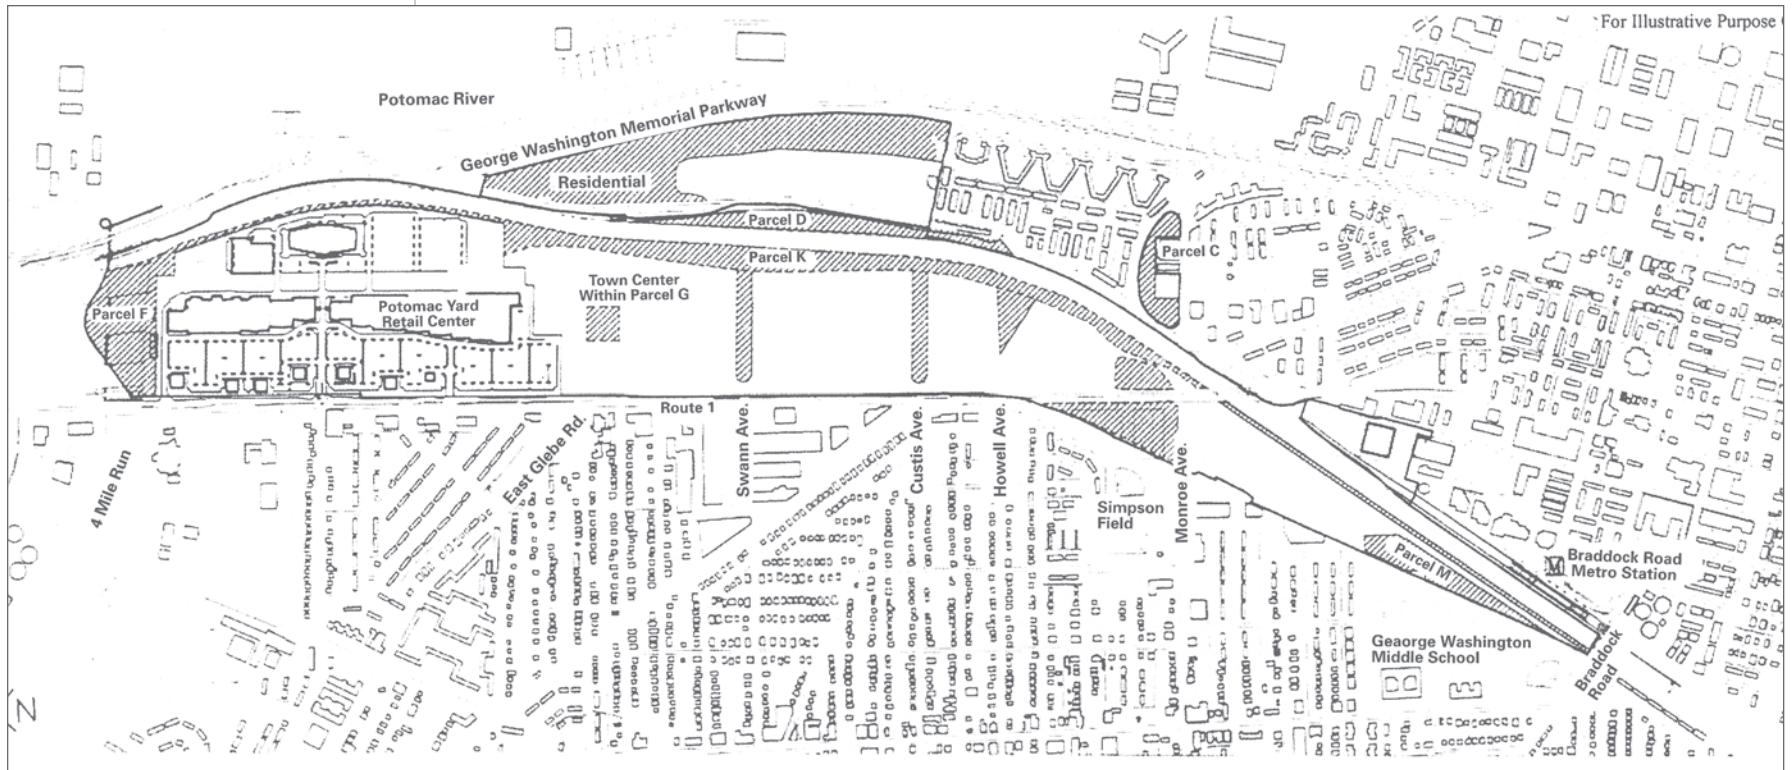




The Potomac Yard Park

Potomac Yard Park stretches the entire length of the site adjacent to the railroad corridor and is one of the most significant open spaces in the plan. It covers approximately 27 acres including approximately 3 acres of open water feature used for BMP ponds. BMPs shall only be located within this park if approved and designed to the City's satisfaction. The park provides convenient and accessible open space amenity, including a significant extension of the Simpson Field which can accommodate two regulation-sized large play fields. Other active sports facilities for all residents and the general public will also be located throughout.

At the north end of the park, a connection to the existing Four Mile Run bike trail will be made over the easternmost railroad bridge. At the south end of the park, a direct and safe connection will be made to the Braddock Road trail system. A pedestrian bridge over the tracks shall occur near the end of the Custis Street axis at such times as an agreed upon level of development has been achieved, providing an east-west connection.


The park should be comprised of a mix of active and passive uses. About 30% of the total area should be dedicated for active recreational uses such as tennis courts, basketball courts, or children's playgrounds. The remaining

70% should be a mix of hard and soft landscaped areas. A bioretention storm water management system, which allows the ground surface to be treated as usable open space is envisioned to be incorporated into the park design. Bike trails and pedestrian paths of a minimum width of 10ft clear travel way should be abundant and continuous with interesting stopping points, such as where paths converge or at the end of street vistas. The eastern edge of the park should be shielded from the noise and view of the railroad by an attractive landscape buffer. Refer to the Parkscape Standards for landscape, material, lighting, and site furniture standards.

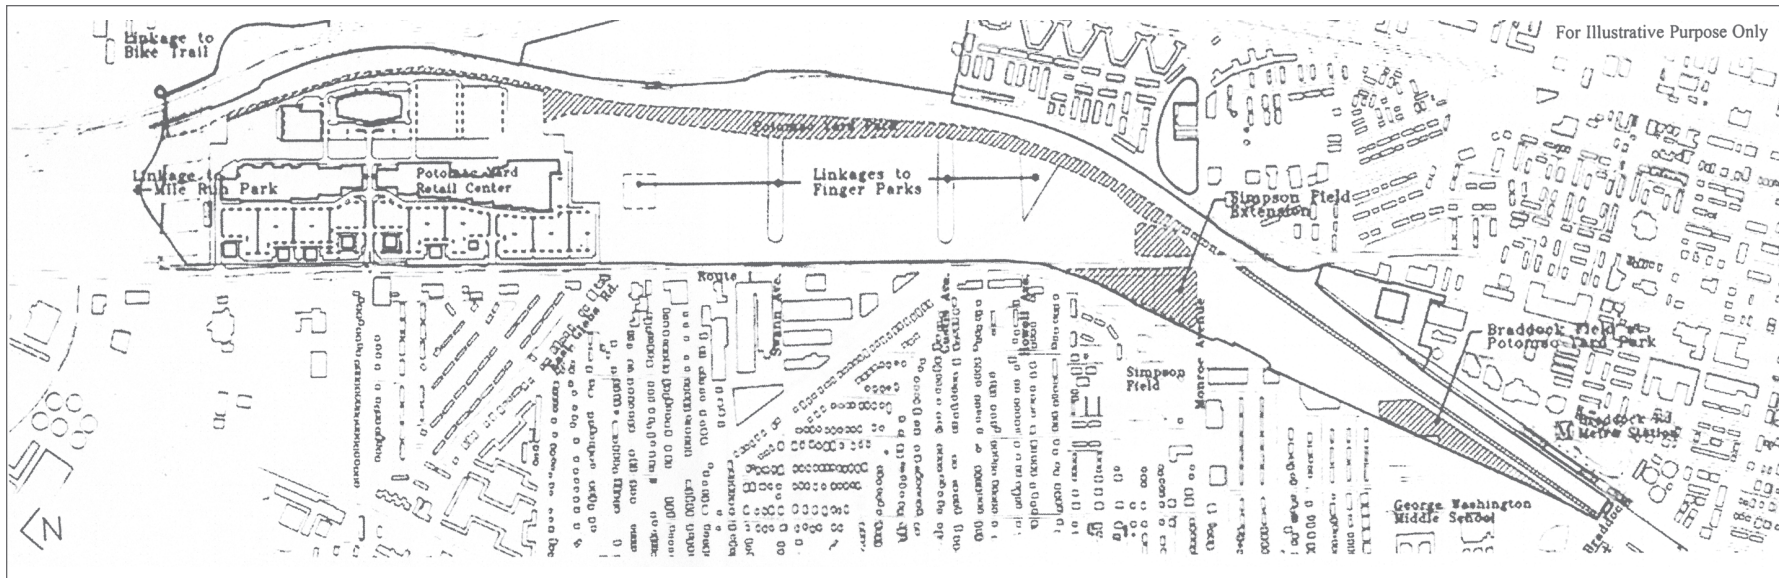


Simpson Fields at Potomac Yard Park

When the new Route 1 Bridge is constructed, the Route 1 frontage of the existing Simpson Fields will be extended to its new alignment. The park will be approximately 5 acres, and will accommodate two regulation-sized soccer fields. Refer to the Parkscape Standards for landscape, material, lighting, and site furniture standards.

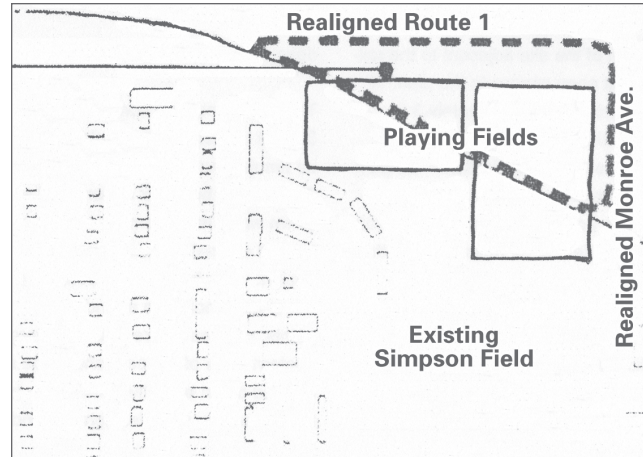

Braddock Field at Potomac Yard Park

Braddock Field, located at the southern end of Potomac Yard Park will allow the currently under utilized and undersized school field to adequately accommodate a regulation-sized soccer field. Two acres of field space shall be designed in conjunction with the George Washington Middle School fields. Refer to the Parkscape Standards for landscape, material, lighting, and site furniture standards.

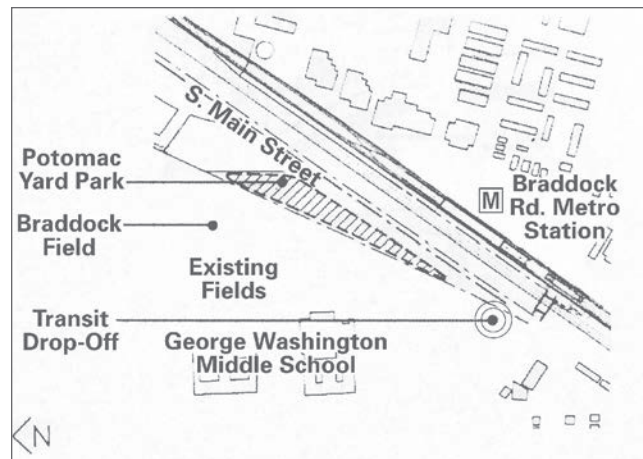




Four Mile Run Park

Four Mile Run Park is located at the northernmost end of the property and consists of four existing railroad bridges, the embankment of Four Mile Run, an existing trail at the water level, and a small amount of land on the south side of the river.

The easternmost existing railroad bridge shall be used for the extension of Potomac Avenue connecting Alexandria to Arlington. The character and cross section of the street shall remain the same throughout. A pedestrian and bike connection will be made from the Potomac Yard Park to the Four Mile Run trail system.

The remaining three existing railroad bridges and land area will be of soft and hard landscape. Lighting for the underside of the bridge will be of special concern. Park pavilions are permitted on the two western bridges. The spaces shall be marketed for commercial recreational uses. The portion of the park on the north side of the river will be designed in conjunction with the Arlington park system. Refer to the Parkscape Standards for landscape, material, lighting, and site furniture standards.


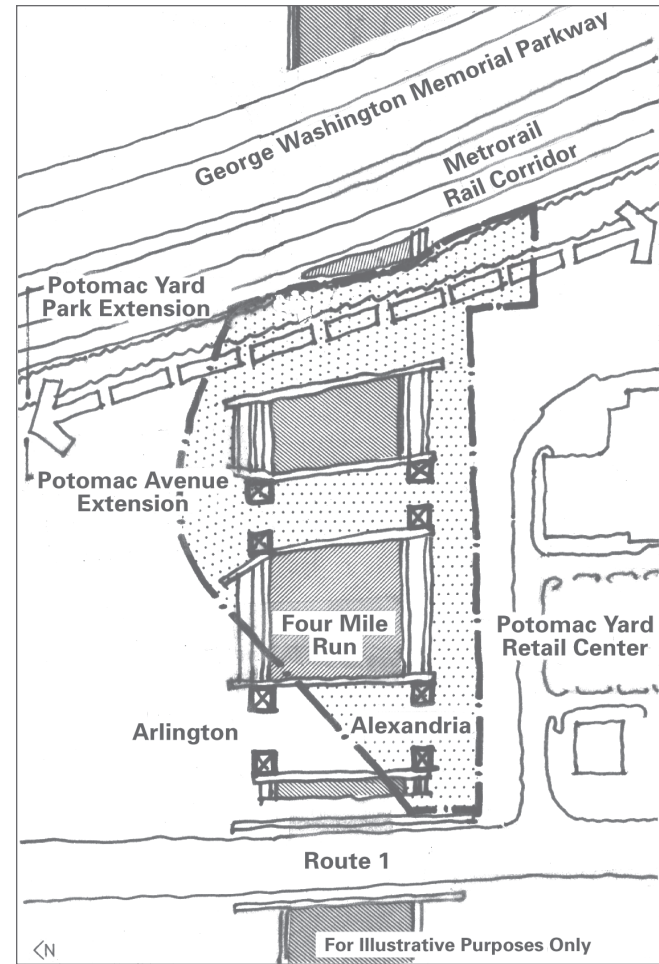


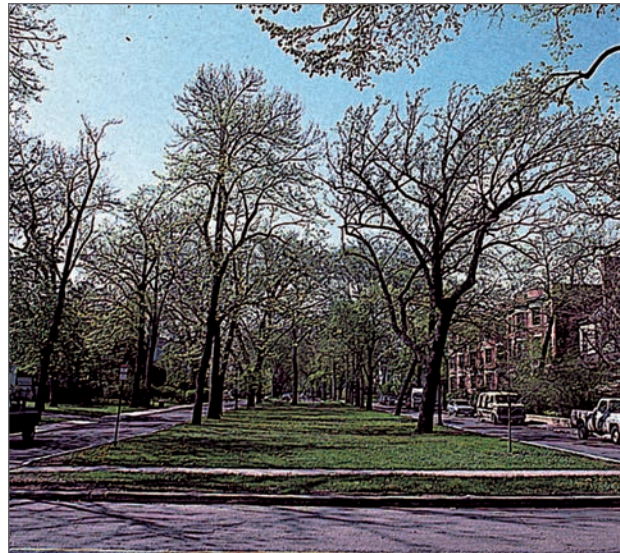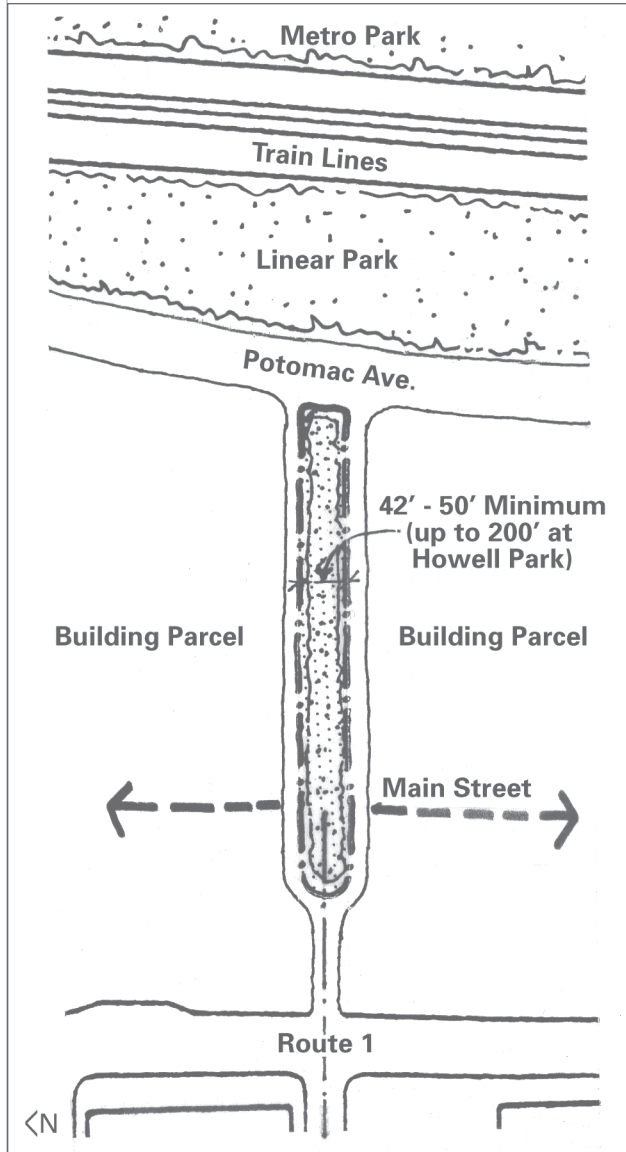

Finger Parks

Oriented east-west, Finger Parks are extensions of Potomac Yard Park into the neighborhoods. They incorporate the streetscape of Swann and Custis Streets as part of the open space.

Finger Parks will be a minimum of 42ft-50ft in width and will be for a minimum of 80% of the block length from Main Street to Potomac Avenue. Park edges will be lined with shade trees. Park space will be mostly lawn with pedestrian paths and occasional stopping points furnished with park benches. Elements such as small fountains, a sundial, or other markings are encouraged to signify axial relationships. Alleys of adjacent residential frontages will not be accessed from streets with Finger Parks. Refer to the Parkscape Standards for landscape, material, lighting, and site furniture standards.

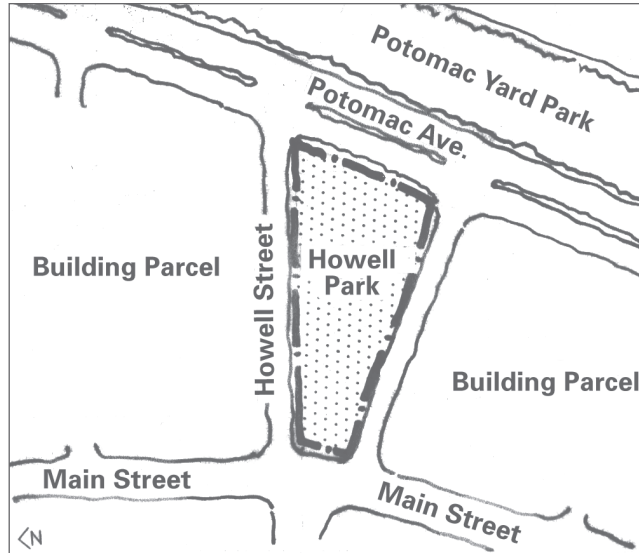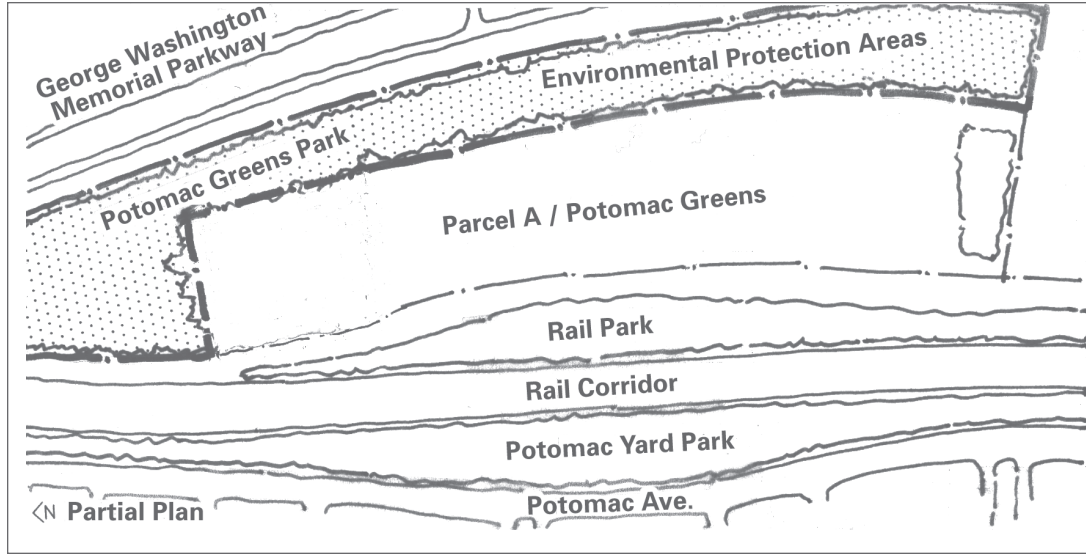

Potomac Greens Park

Potomac Greens Park includes the existing environmental protection areas adjacent to the George Washington Memorial Parkway to the north and east of the property. Interpretative nature trails are highly recommended for this area. Refer to the Parkscape Standards for landscape, material, lighting, and site furniture standards.


Howell Park

Howell Park takes on an interesting triangular shape due to the bend in the existing railroad corridor which brings together two street grid patterns. It is approximately 3/4 acres, and should be primarily landscaped with lawn and trees to provide visual interest and passive recreational use. Refer to the Parkscape Standards for landscape, material, lighting, and site furniture standards.



Rail Park

Rail Park, located between the two rail corridors, is about 4.2 acres. It will offer a variety of active and passive open spaces. Access to the park is from Potomac Greens Drive near the north end of Old Town Greens. Pedestrian access shall be provided at the south end of the park by a footbridge over the Metro tracks. A dog run area will be located on the southern portion of the site, with access and parking to the satisfaction of the City. The run shall be fenced, have a gravel surface, water source, benches and dog waste receptacle. The remainder of the site shall be utilized for open space or left unimproved, except for a grass or planted surface, as determined by the City. The Metro Rail service drive shall be maintained and possibly used as vehicular service access for the park. Refer to the Parkscape Standards for landscape, material, lighting, and site furniture standards.

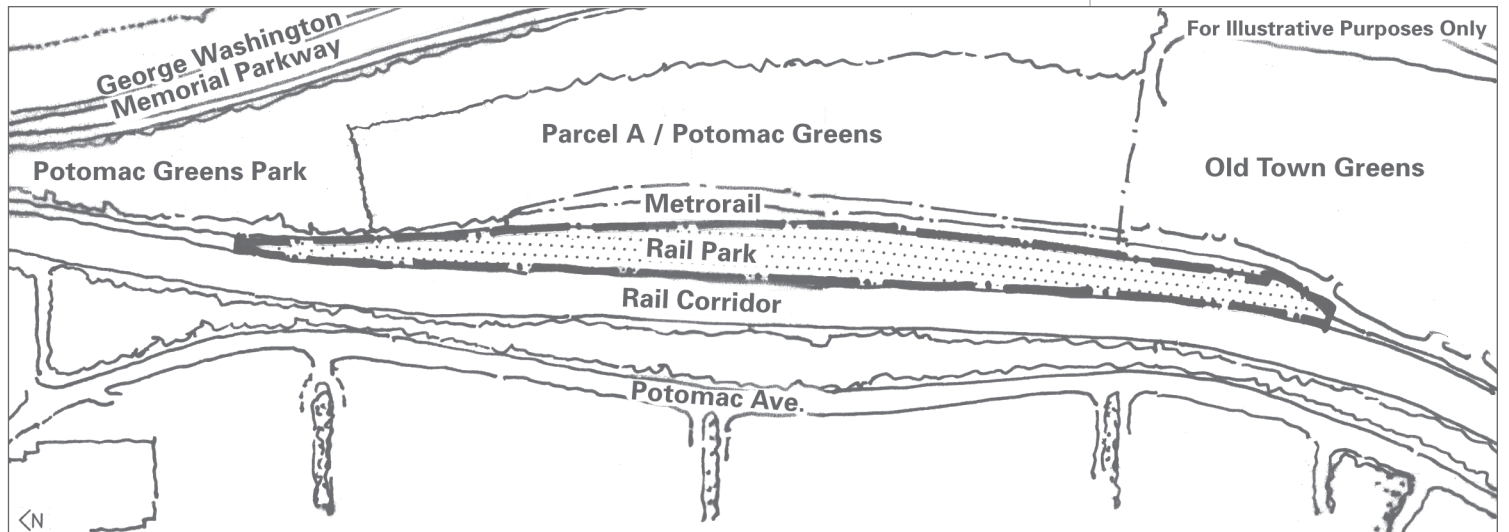


Summary of Open Space Criteria

Dedicated Public Open Space***	Area	Design Intent	% of area Active Use	% of area Passive Use	Recreational and Special Use*	Tree Coverage In 10 Years	Trails and Paths	% of Trees **		
								Shade Trees	Understory Trees	Evergreen Trees
³ Potomac Yard Park	26.7 Gross Acres	Linear park serving Potomac Yard and surrounding neighborhoods. Open space link from Braddock Road to Four Mile Run	30%	70%	BMP/Bio retention if approved by the City Two tennis courts Two basketball courts Two volleyball courts Fitness course, Playground Picnic areas, Play field Multipurpose lawn areas	40%	Extension of regional trails system	55 to 85%	5 to 10%	0 to 20%
³ Braddock Field at Potomac Yard Park	2.0 Acres	Region-serving Play Field	100%	0%	Play field	0%	NA	NA	NA	NA
³ Monroe Fields at Potomac Yard Park	Area included in Potomac Yard Park	Two region-serving Play Fields	100%	0%	Play field	0%	NA	NA	NA	NA
³ Potomac Greens Park	17.5 Acres	Passive recreation and nature area	0%	100%	environ. protection areas picnic areas, playground	30% w/o wetlands	Park-serving trails and boardwalks	75 to 100%	0 to 5%	0 to 5%
³ Potomac Plaza	1.5 Acres	Landscaped Area	0%	100%	-	50%	Park-serving sidewalks and trails	75 to 100%	0 to 5%	0 to 5%
³ Rail Park	4.2 Acres	Public dog-run area. Park that primarily serves Potomac Greens and Old Town Greens.	25%	75%	Dog run, remainder of use determined by the City	25%	Park-serving trails	65 to 100%	0 to 10%	0 to 10%
Four Mile Run Park***	4.4 Acres	Destination park located at the juncture of regional trails. Waterfront opportunities to be made available for commercial recreation use	10%	90%	Bridgedeck gardens, waterfront opportunities	10%	Connections to regional trails	60 to 90%	10 to 20%	10 to 30%
³ Howell Park	0.7 Acre	Neighborhood park	10%	90%	Neighborhood gatherings	40%	Sidewalks and internal paths	75 to 100%	0 to 5%	0 to 5%
³ Finger Parks at Swann & Custis	0.8 Acre	Neighborhood park and east-west greenway. Pedestrian linkage Del Ray to Potomac Yard Park.	0%	100%	Pedestrian connection	70%	Sidewalks	90 to 100%	0 to 10%	0%
Neighborhood Parks***	3.6 Acres approx.	Neighborhood-serving parks offering a place for social interaction	10%	90%	Dog runs, tot lots and playgrounds, sitting areas	30%	Sidewalks and internal paths	75 to 100%	0 to 5%	0 to 5%

* Different but comparable, amenities may be provided if requires or approved by the City.
 ** Shade, understory and evergreen tree percentage may be modified by the City in conjunction with plan approvals.
 *** Those open spaces not dedicated to the City shall be subject to a public access easement.

General Land Use Plan

Potomac Yard is envisioned as a mixed-use development similar to Old Town Alexandria. The parcel just south of the existing Potomac Yard Center is envisioned to be a higher density mixed-use development. Along Route 1, a mix of residential apartments and small office buildings will transform the high-speed auto-oriented nature of the road to a pedestrian-oriented road. Near the Braddock Road Metro Station, there is also a higher density mixed-use node to take advantage of the transit opportunities.

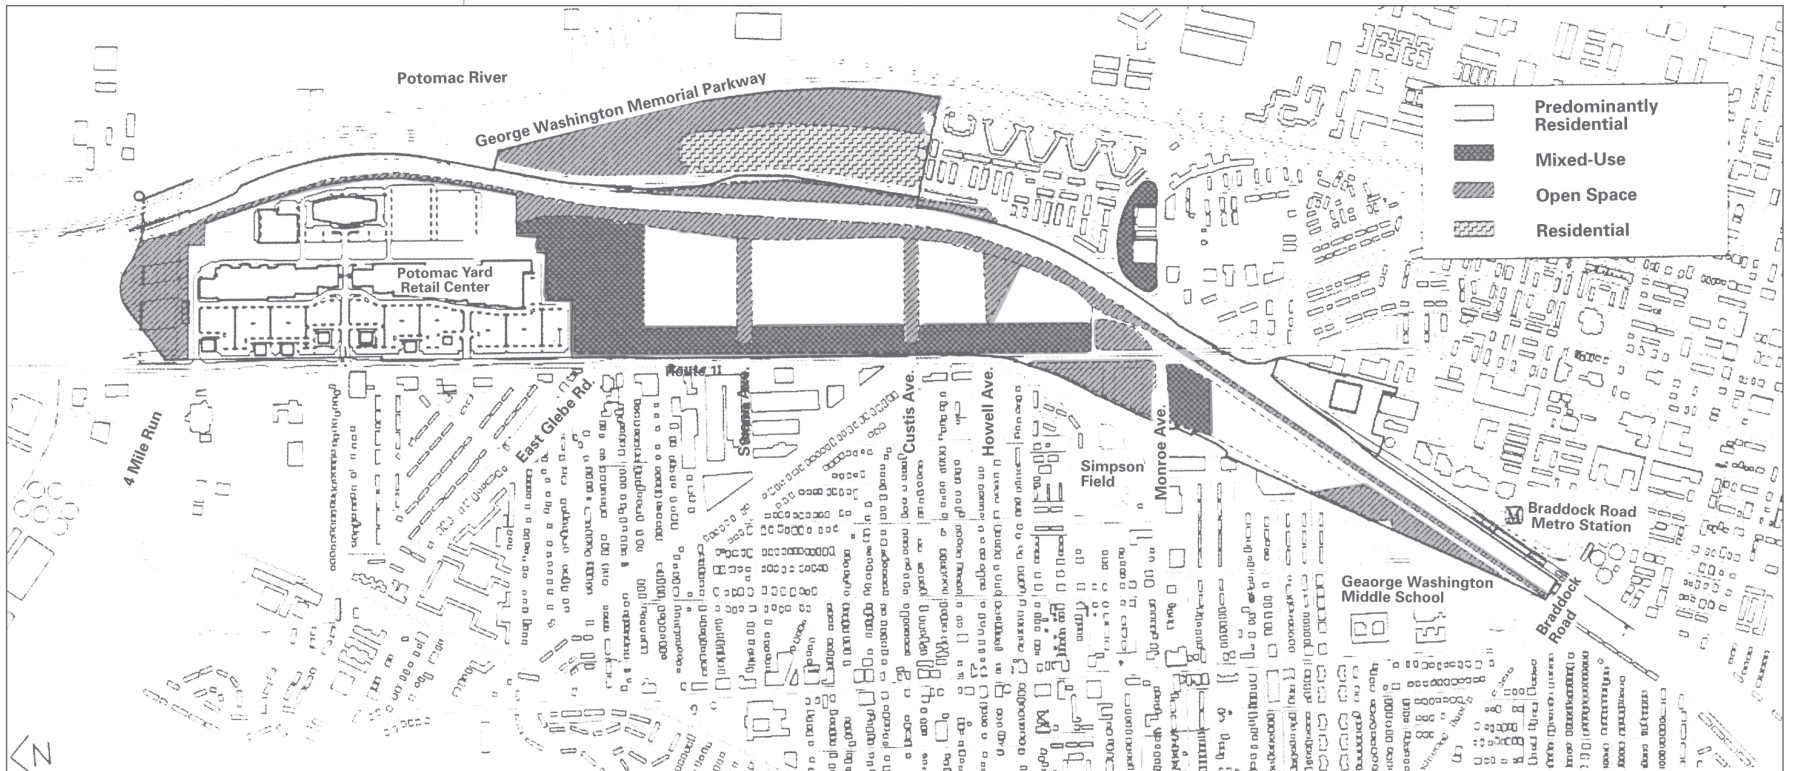


The Parcel Plan

Potomac Yard has seven major development parcels. These parcels are typically defined by the framework streets and parks. They can be developed individually with their own identity and character within the parameters of these guidelines.

Each parcel will be organized by an interconnected street system, and an orthogonal block system. Streets will follow the Neighborhood Streets guidelines. Street and block patterns,

park requirements, street wall and building orientation requirements for each parcel are prescribed in the following pages.

Main Street will be continuous and connected through each neighborhood. It will serve as a transit corridor linking all of the parcels to points of interest and the Braddock Road Metro Station. Within each parcel, there is a flexibility of the block layout to allow a variety of building types, lot sizes, park and street configurations.

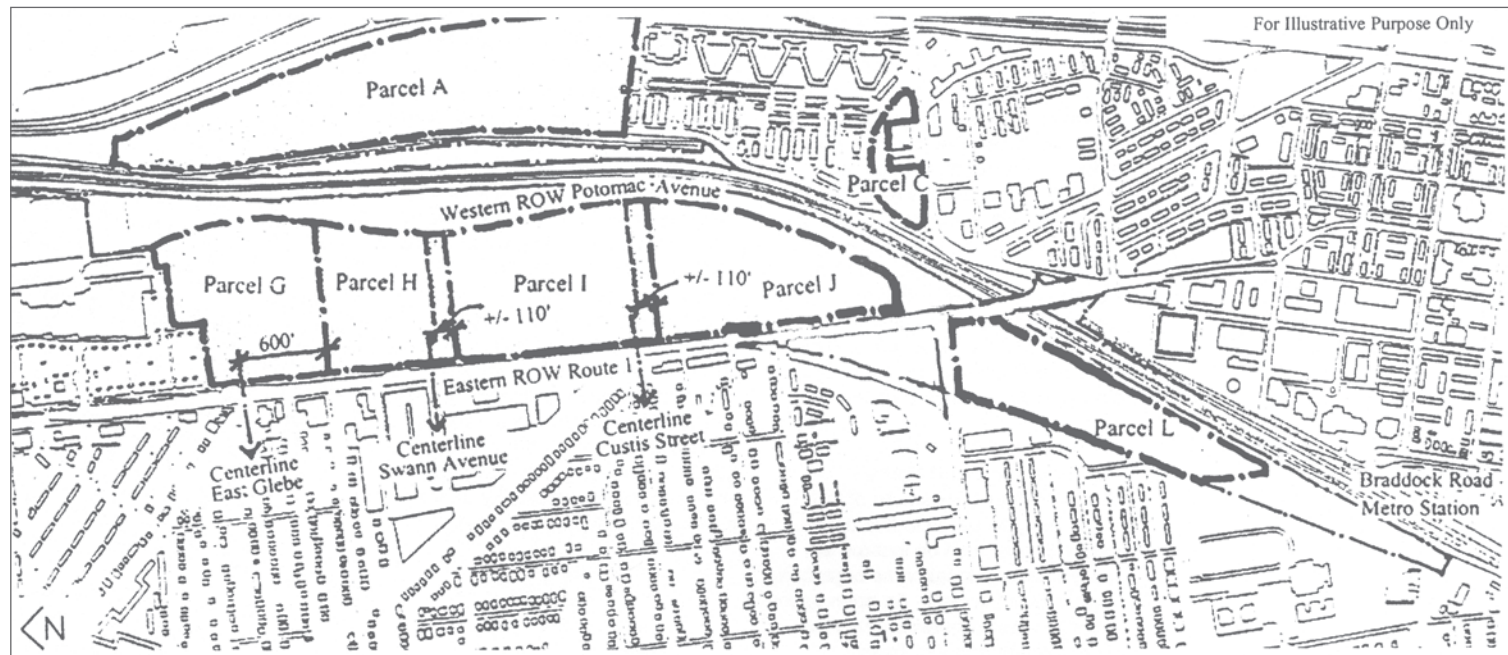

Parcel Development Standards

Parcel A

The Neighborhood

Parcel A, approximately 33 acres, is located north of the existing Slaters Village and is known as Potomac Greens. Of the 33 acres, approximately 16 acres are existing wetlands located at the north and east ends of the parcel. This parcel is intended to be all residential. The main access to the parcel is from Potomac Greens Drive which will be extended into Parcel A providing access to the point of a potential future Metro Station. It will be a residential neighborhood organized by a series of small place-making parks.

The Street and Block Plan


The street and block pattern in this parcel is organized by a series of landscaped squares creating amenity for the residents. Streets will be primarily orthogonal. Blocks will be organized with their longer frontage oriented in the east-west direction, but not more than 320ft in length. Parking for all residential units, except for those units directly fronting onto the George Washington Memorial Parkway, is to be accessed from an alley. Alleys shall not dead-end.

The Neighborhood Parks

There shall be a minimum of 2.5 acres of open space in this parcel. Refer to 'Potomac Greens Park' in the Framework Open Space section. This acreage shall be located at more than one location as organizing elements in the plan. An open space shall be located between the new development and Old Town Greens and incorporate the existing pond and substation building as part of the parkscape. The main purpose of these parks is to provide an attractive address and localized open space for the neighborhood residents. The minimum dimension of such spaces is 40ft by 80ft. Parks shall be framed by residential one-way streets.

The Buildings

All buildings shall have their facades parallel to the front lot line to form the street wall. Street walls shall be built to the full extent of the frontage lot width. Corner lots shall be built to no less than 50% of the side street lot frontage. Building articulation on corner lots is especially encouraged to create "gateway" structures with architectural elements such as cupolas, chimneys and hipped roofs. All building elevations facing or visible from George Washington Memorial Parkway shall be fully articulated as a primary facade. No garage doors shall be facing the parkway. The typical building types in this parcel include townhouses and stacked townhouses. Within 500ft of the centerline of the George Washington Memorial Parkway, buildings are limited to 45ft in height. The remaining portion of the parcel shall not exceed 55ft in height. A variety of height shall be provided, including some townhouses 35ft or less in height.

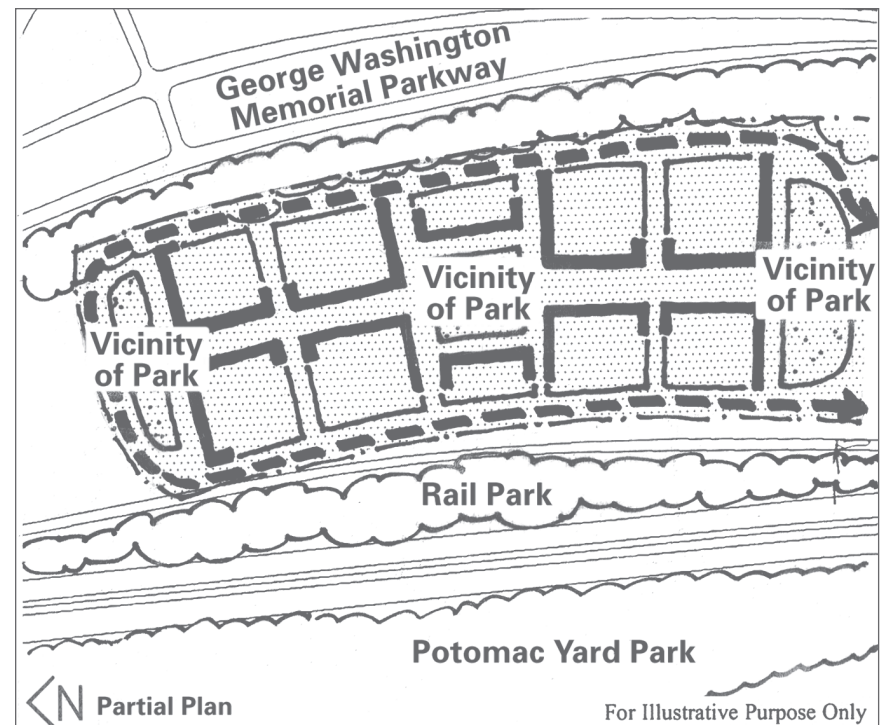

Parcel C


Parcel C, located within the one-way loop of Slaters Lane, is approximately three acres. This parcel shall be utilized for retail use and be landscaped to provide an attractive entry into this part of the City.

Neighborhood Parks

The eastern portion of the parcel shall be landscaped with trees to denote Slaters Lane as a gateway from the George Washington Memorial Parkway. The northern portion of the parcel shall be landscaped with trees to conceal the existing industrial use in the middle of the block.

The Buildings

Community oriented use such as a convenience retail store or small community-serving professional offices, no more than 50ft in height, is encouraged on the site. Required parking shall be provided on site at grade.

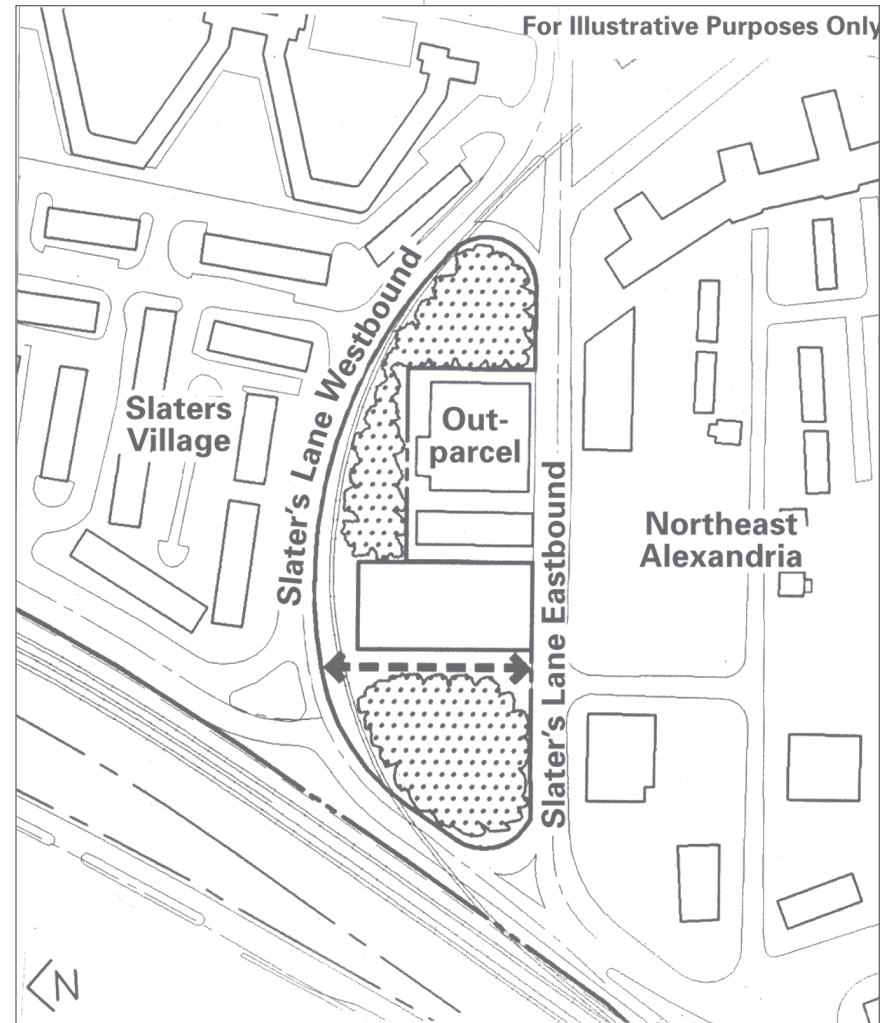

Parcel G

The Neighborhood

Parcel G, the neighborhood just south of the existing Potomac Yard Center, is approximately 20 acres. With a major portion of the office program and the highest density residential program located in this parcel, it serves as a "town center" for the community. Its main east-west connection is East Glebe Road. There shall be a mix of uses and buildings in each block. Retail use at the ground floor is highly encouraged. Parking in this parcel shall be primarily underground, or if at grade, embedded within the block.

The Street and Block Plan

The street and block pattern will be primarily orthogonal. The extension of East Glebe Road shall be perpendicular to Route 1 and maintained as a view corridor eastward to Potomac Yard Park. Each block shall be no more than 1250ft in total perimeter frontage, and no more than 400ft in any one direction. Within each block, there may be multiple lots. The centerline of Main Street shall be no more than 350ft away from the property line on Route 1, and shall align with the centerline of Main Street in adjacent parcels. It shall provide an access to the existing retail center to the north. The north boundary of this parcel follows the property line along the southern edge of Potomac Yard Retail Center. The south boundary of this parcel shall be the southern right-of-way line of a residential street. The mid-block, publicly accessible pedestrian connection extending from Howell Avenue to East Glebe Road in the blocks between Main Line Boulevard and Potomac Avenue shall be maintained*.

The Town Green

A centrally located town green of 1.25


acres minimum is required as the focal point of this parcel. This open space should be rectilinear in shape with a minimum width of 100ft. At least 30% of the area should be paved to accommodate informal community gatherings. At least three sides of the town green shall be bordered by one-way streets with on-street parking on the building side. Sidewalks on these streets on the building side shall be a minimum of 19ft to encourage pedestrian-oriented retail activities, such as sidewalk cafes, and restaurant seating. A prominent location in the Town Green should be reserved for a park pavilion of distinctive form.

The Buildings

Buildings shall have their facades parallel to the front lot line to form the street walls. Streetwalls shall be built for no less than 80% of the front lot width. Main entrances shall be located at the front lot line. Parking and service entrances shall be to the rear off alleys or side streets. Parking at grade, if any, shall be built behind retail or along side frontages and shall be shielded from pedestrian view by a fence or wall of 4ft minimum height. Awnings, balconies, and projecting windows of 2.5ft depth or less are encouraged and may encroach into the right-of-way.

(Text deleted per amendments approved November 13, 2010)

The building types in this parcel are mainly medium office buildings, large apartments and mixed-use apartments. The tallest building in this parcel shall be the hotel with its main structure close to 110ft in height. Up to seven other buildings in addition to the hotel may be up to 110ft in height. Office buildings on Route 1 shall not exceed 82ft. A variety in building heights for the entire parcel is required.

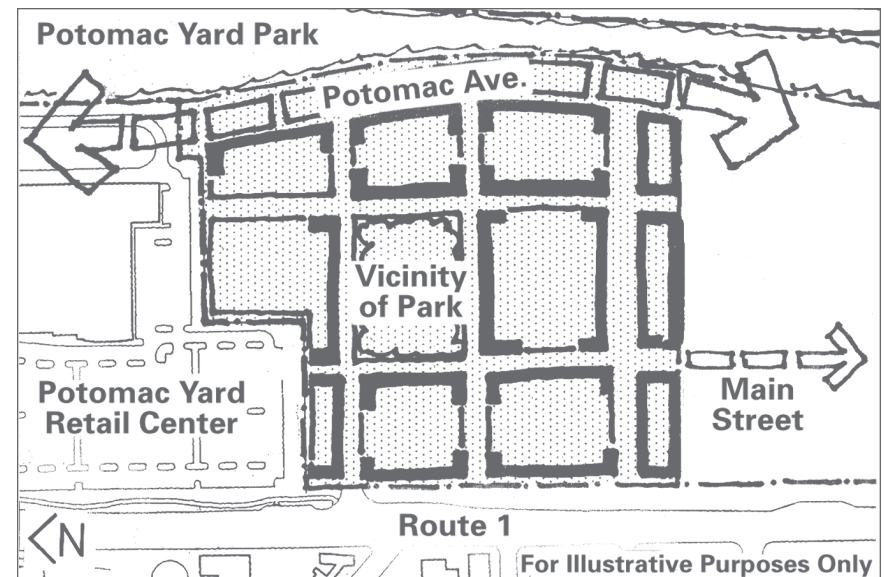

* Amended November 13, 2010

Parcel H

The Neighborhood Parcel H, located just south of Parcel G, is approximately 13 acres. It is a primarily office neighborhood with some residential. Land uses may be adjusted to accommodate the flexibility specified in the Master Plan CDD Guidelines and the amended CDD Concept Plan dated September 24, 2010*. The blocks between Main Street and Route 1 shall be mixed in use and building type. The main east-west connection is Swann Avenue.

The Street and Block Plan

The street and block pattern shall be primarily orthogonal. The centerline of Main Street shall be no more than 250ft away from the property line on Route 1. Its centerline shall align with the centerline of Main Street in adjacent neighborhoods. The eastern terminus of east-west residential streets shall always be Potomac Yard Park.

Each block shall be no more than 1750 ft in total perimeter frontage, and no more than 500 ft in any one direction.* In each block, there may be multiple lots. The blocks along Route 1 shall have their longer frontage facing Route 1. In the blocks fronting Route 1, there shall be at least one pedestrian through block connection from Main Street to Route 1. The mid-block, publicly accessible pedestrian connection extending from Howell Avenue to East Glebe Road in the blocks between Mainline Boulevard and Potomac Avenue shall be maintained.*

The north boundary of this parcel abuts a residential street in Parcel G (text deleted per amendments on November 13, 2010).

An alley system is required for parking to ensure the streets free of garage doors and curb cuts. Alleys shall not be accessed from Swann Avenue, nor shall they be dead-ends. No median breaks along Potomac Avenue shall be allowed between Swann Avenue and Custis Avenue. No median breaks along Swann Avenue between Main Line Blvd. and Potomac Avenue shall be allowed. No curb-cuts along Swann Avenue shall be allowed*.

The Neighborhood Parks


There shall be a minimum 10,900 sf (1/4 acre) of park/plaza space(s) in addition to the Swann Finger Park within the parcel.* The main purpose of the park(s)/plaza(s) is to provide passive recreation space.* (Text deleted per amendments on November 13, 2010). Parks shall be bordered by residential or one-way streets.

The Buildings

All buildings shall have their facades parallel to the front lot line to form the street wall. Street-walls, except for those on Route 1, shall be built for no less than 80% of the front lot width. Buildings on Route 1 shall be extended along the front lot line no less than 60% of the lot width. Main entrances shall be located at the front lot line. Parking and services shall be at the rear accessed by alleys. The typical building types in this parcel are office with ground floor retail, multi-family residential, townhouses, and stacked townhouses.* Buildings shall range in height from 45 ft to 110 ft. Buildings between Mainline Blvd and Route 1 shall have a maximum height of 100 ft with appropriate transitions to adjacent uses and Route 1 frontage.* (Text deleted per amendments on November 13, 2010).

Federal Tenants

Additional design and parking flexibility to accommodate Federal tenants shall be permitted in Landbay H and partial I with design parameters to be developed prior to or concurrent with the DSUP process.*

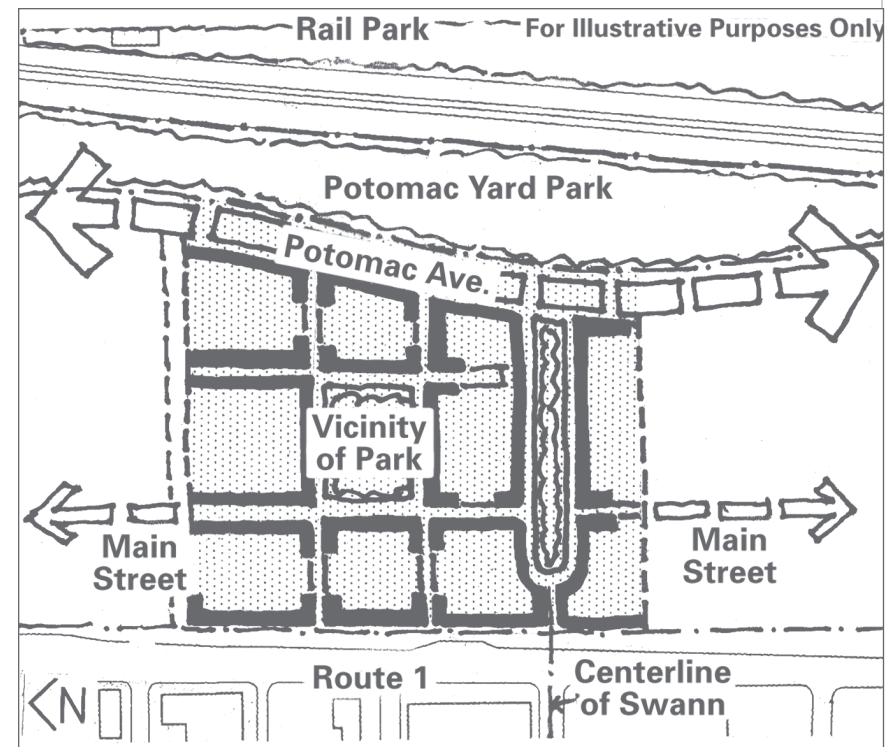

* Amended November 13, 2010

Parcel I

The Neighborhood

Parcel I, located just south of Parcel H, is approximately 23 acres. It is a primarily residential neighborhood. The blocks between Mainline Boulevard and Route 1 shall be primarily residential in use with accessory retail permitted. Land uses may be adjusted to accommodate the flexibility specified in the Master Plan CDD Guidelines and the amended CDD Concept Plan dated September 24, 2010*. This parcel has multiple access points from Route 1, but Custis Street is the only signalized intersection.

The Street and Block Plan

All of the street and block guidelines for Parcel H apply to this parcel with the exception that in the blocks on Route 1, there shall be at least one pedestrian through block connection in addition to the street connections, connecting Main Street to Route 1. No median breaks along Potomac Avenue shall be allowed between Swann Avenue and Custis Avenue. No parking garage access for office uses shall be allowed on Bluemont Avenue. The mid-block, publicly accessible pedestrian connection extending from Howell Avenue to East Glebe Road in the blocks between Main Line Boulevard and Potomac Avenue shall be maintained.*

(Text deleted per amendments on November 13, 2010). The south boundary is and includes the alley of the development on the south side of Custis Street. An alley system is required for parking to ensure streets free of garage doors and curb cuts. Alleys shall not be accessed from Custis Street, nor shall be dead-ends.

* Amended November 13, 2010

The Neighborhood Parks


There shall be a minimum of 22,000sf (approximately 1/2 acre) of park space in addition to the Custis Finger Park within the parcel. It can be used at one or more locations. The main purpose of these parks is to provide primarily passive recreational space for the neighborhood residents. The minimum dimensions of one of the spaces are 120 ft by 120 ft. Parks shall be bordered by residential or one-way streets.

The Buildings

All of the building guidelines for Parcel H apply to this parcel except for height. It is a residential neighborhood with accessory retail permitted. The typical building types in this parcel include townhouses, stacked townhouses, and multi-family buildings.* (Text deleted per amendments on November 13, 2010). Multi-family and office buildings on Route 1 may be a maximum 90 ft in height. Townhouses and stacked townhouses will range between 35 ft and 55 ft in height.* (Text deleted per amendments on November 13, 2010).

Federal Tenants

Additional design and parking flexibility to accommodate Federal tenants shall be permitted in Landbay H and partial I with design parameters to be developed prior to or concurrent with the DSUP process.*

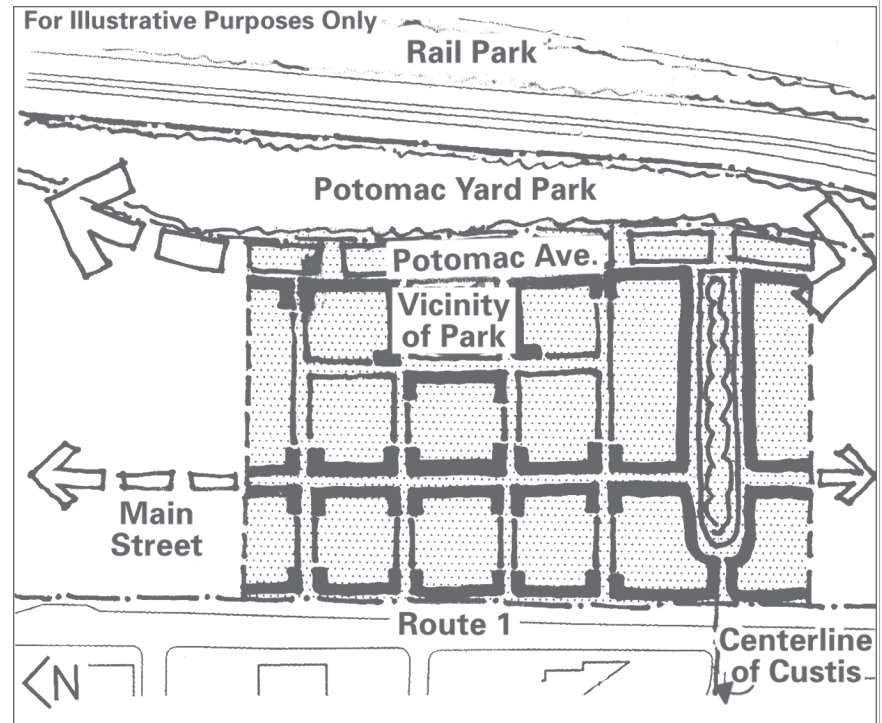

Parcel J

The Neighborhood

Parcel J, located south of Parcel I and north of the newly extended Monroe Avenue, is approximately 16 acres. It is a residential neighborhood with accessory retail permitted. Land uses may be adjusted to accommodate the flexibility specified in the Master Plan CDD Guidelines and the amended CDD Concept Plan dated September 24, 2010*. Its main access points are Potomac and Howell Avenues.

The Street and Block Plan

The street and block pattern shall be orthogonal to the newly realigned Route 1. The centerline of Main Street shall be no more than 250ft away from the property line on Route 1. Its centerline shall align with the centerline of Main Street of the adjacent parcels. The eastern terminus of east-west residential streets shall always be Potomac Yard Park. Potomac Avenue shall meet the newly realigned Route 1 as a full service T-intersection at grade before the Route 1 Bridge rises. Refer to Framework Streets Guidelines.

Each block shall have no more than 1700 ft in total perimeter frontage, and no more than 657 ft in any one direction (Applicant)*. In each block, there may be multiple lots. The blocks along Route 1 shall have their longer frontage facing Route 1. There shall be at least one pedestrian through block connection in addition to the street connections connecting

Mainline boulevard to Route 1.*(Text deleted per amendments on November 13, 2010).


The Neighborhood Parks

Due to the generous size of adjacent Framework Parks there is no minimum neighborhood park requirement in this parcel. However, they are encouraged as neighborhood amenities which add value to the development.

The Buildings

All of the building guidelines for Parcel H and I apply to this parcel except for height. In addition, buildings sharing lot lines with Potomac Yard Park shall build no less than 80% of the park front lot width. The typical building types east of Main Street are townhouses and stacked townhouses. They shall range in heights from 35ft to 55ft, with at least some of the town houses no more than 35ft in height. Multi-family and office buildings on Route 1 may be a maximum 90 ft in height. Townhouses and stacked townhouses will range between 35 ft and 55 ft in height.*

* Amended November 13, 2010

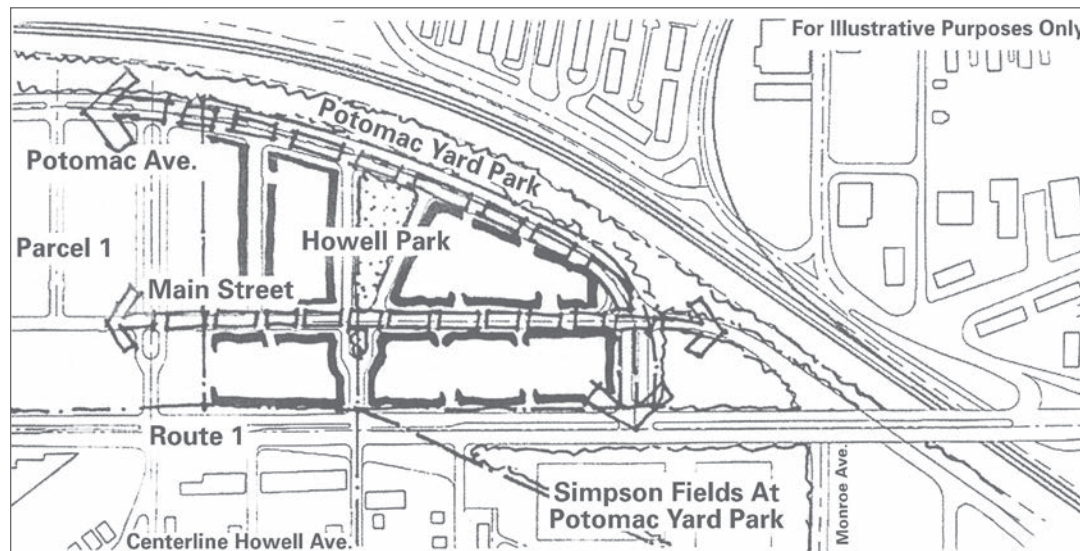

* Amended November 13, 2010

Parcel L

The Neighborhood

Parcel L, approximately 17 acres, is located between the newly extended Monroe Avenue and Braddock Road. (Text deleted per amendments made on November 13, 2010). South Main Street provides the main vehicular access and address for this parcel. Since this parcel borders existing properties with multiple ownerships, street and pedestrian linkages to the existing neighborhood are particularly important.*

The Street and Block Plan

The streets in this parcel shall provide a reservation for two potential future connections to the adjoining neighborhood streets through off site properties.* The eastern terminus of east-west streets shall always be Potomac Yard Park. The newly extended Monroe Avenue shall meet South Main Street as a T-intersection near or underneath the new Route 1 Bridge. No streets shall dead-end except for future offsite connections and South Main Street which ends in a cul-de-sac near Braddock Road. South Main Street shall be continuous from Parcel J.

Blocks shall be no more than 1500 ft in total perimeter frontage, and no more than 550 ft in any one direction. Approximately 50% of the block perimeter shall abut a street.* In each block, there may be multiple lots.


The Neighborhood Parks

A total of 20% of the parcel area shall be set aside as open space. It can be located at one or more locations. The primary purpose of the open space is to provide passive recreation for the residents of this parcel and the public.*

The Buildings

All of the building guidelines for Parcel H, I, and J apply to this parcel except for height. In addition, all buildings are required to set back from the western property line a minimum of 30 feet.

The setback area shall be landscaped and follow the guidelines for pedestrian through-block connections. The typical building types in this parcel are townhouses, stacked townhouses, and multi-family townhouses.* Multi-family buildings up to 90 ft in height are permitted and the remaining buildings shall not exceed 55 ft in height.* All buildings shall have their major bulk on South Main Street (and Monroe Avenue) and step down towards the existing neighborhood.

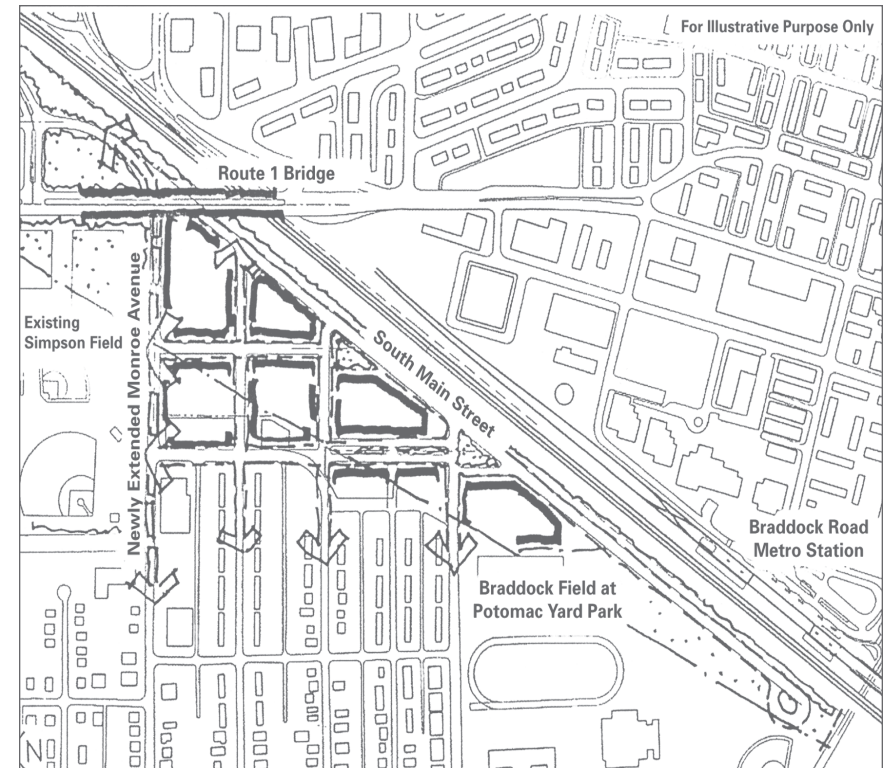

* Amended November 13, 2010

Summary of Parcel Development Crite

	Parcel A Potomac Greens	Parcel C Potomac Plaza	Parcel G Town Center	Parcel H	Parcel I	Parcel J	Parcel L
General Land Use	Residential	Primarily open space	Mixed-use office, retail, residential and hotel	Mixed-use office, retail and residential*	Residential*	Residential with accessory retail*	Residential with accessory retail
Total Area	33.6 Acres	3.1 Acres	19 acres	18.9 acres	22.6 Acres	16 acres	14 acres
Min. % Open Space Required	56%	50% (app. 1.5 acres)	7% [including Town Green (app. 1.5 acres)]	6% [including Finger Park (app. 0.25 acres)]	7% [including Finger Park (app. 0.5 acres)]	4% [including Howell Finger Park (app. 0.75 acres)]	20% (app. 2.8 acres)
Max. Block Perimeter	n/a	n/a	1250ft	1750ft	1750ft	1700ft	1500ft
Max. Block Dimension in one direction	n/a	n/a	400ft	500ft	500ft	675ft	550ft
General Building Height	45ft within 500ft of GWP 56ft max variety of heights 35'-55'	50ft max	45ft-110ft variety of heights	110ft Max.	35-55ft for Townhouse and Stacked Townhouse 90ft for Multifamily Buildings	35-55ft for Townhouse and Stacked Townhouse 90ft for Multifamily Buildings	35-55ft for Townhouse and Stacked townhouse 90ft for Multifamily Buildings
General Building Type	Townhouses and stacked townhouses	Small office	Office, hotel, and various residential	Office with ground floor retail and some residential	Townhouse, Stacked townhouse (urban loft), and Multifamily	Townhouse, Stacked townhouse (urban loft), and Multifamily	Townhouse, Stacked townhouse (urban loft), and Multifamily

NOTE: Revisions shaded in yellow.

*** The criteria in this chart may be adjusted to accommodate the flexibility specified in the Master Plan CDD Guidelines and the amended CDD Concept Plan dated September 24, 2010 and approved on November 13, 2010.**

* Amended November 13, 2010


Infrastructure

Infrastructure proposed with the development of Potomac Yard shall be in accordance with City of Alexandria design and construction standards. Infrastructure is proposed to be constructed as needed to support each phase of the development. Infrastructure shall include the installation of the appropriate roadways, pedestrian facilities, sanitary sewer system, water supply system, storm water conveyance system, electric, telephone, cable and gas systems and the appropriate erosion and sediment control during the construction phase of the project.

Stormwater management (SWM) to control the peak rate of runoff is not required for this project given its proximity to the Potomac River and Four Mile Run. However, Best Management Practices (BMP) (Water Quality Control) is required for the project to comply with the Chesapeake Bay Ordinance. This project will conform with the applicable sections of the City of Alexandria Chesapeake Bay Act.

Current thinking for the project includes the implementation of traditional BMP's as well as the use of more urban BMP facilities. Traditional BMP systems could include wet and dry facilities (ponds) that will be maintained by an owners' association. Urban BMPs could consist of surface and underground facilities subject to the level of development and the design criteria and the design standards set forth by the City of Alexandria. Urban facilities could include underground sand filters, bioretention facilities, compost filters or other appropriate systems.

Section 4: Building Guidelines

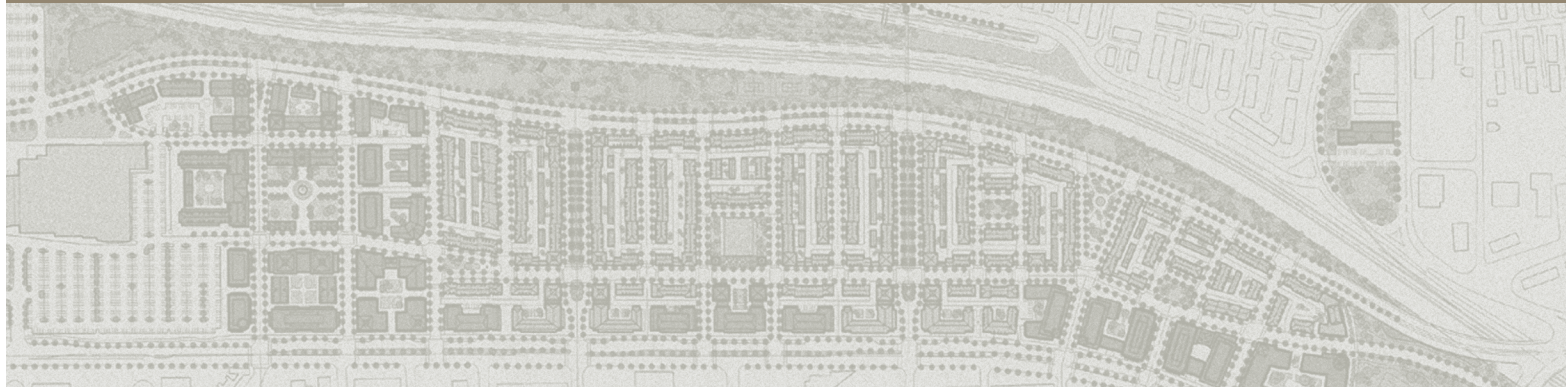

The quality of the neighborhood and its streets and open spaces will be derived in large part by the character of the buildings that front on these spaces. These guidelines identify and focus on those elements that comprise the most public side of the buildings. The following categories of standards designated by building type comprise the basic design requirements.

Urban Standards
Frontage and Orientation
Front Lot Line Coverage and Setbacks
Heights and Massing
Parking and Service

Architectural Standards
Materials
Architectural Elements
Special Features

Building Types
Residential

- a. Townhouses (3-3 1/2 Stories)
- b. Stacked Townhouses (4-4 1/2 Stories)
- c. Small Apartment Building (3-4 Stories)
- d. Large Apartment Building (5 Stories and above)
- e. Mixed-Use Apartment Building Office (3-5 Stories)

Office

- a. Small Office Building (3-5 Stories)
- b. Medium-sized Office Building (5-8 Stories)

Hotel (6-8 Stories)

This page intentionally left blank.



* Amended November 13, 2010

Building Standards and Illustrative Building Types

Townhouses and Stacked Townhouses

Two types of townhouses are in this development, single-family, and stacked.

Single family townhouses serve as the primary building fabric of the development and form the main character and image of the neighborhoods.* Stacked townhouses, having similar exterior appearances and adding variety in housing product, price range, and overall density are proposed on Potomac Yard Park, Mainline Boulevard, and along Route 1.* Typical lot sizes are 18'-25' in width by 55'-100' in depth.

Urban Standards

Frontage, Orientation, and Setback

All townhouses shall have their primary facades with main entries fronting the street. All buildings should extend the full width of the lot at the front facade. The front facade may protrude into the right-of-way for a maximum of 5ft. from the property line for steps, stoops, porches or bay windows that are used on the front facade. The total width of all projections shall not be greater than 60% of the width of the main body of the house.

All townhouses are encouraged to incorporate a variety of color, material, and fenestration pattern in order to ensure the articulation of the street wall. In addition to the zoning requirement of separation, a setback of 12-24 inches from the adjacent front facade is required for at least every six continuous townhouses. The minimum distance between sides of units shall be 10ft (5ft from each property) without windows, and 16ft (8ft from each property) with windows. On corner lots, the main body of the house shall be built up to the lot line on the side street. End units must provide a garden wall of 6ft in height extending from the main body of the house to the garage or the alley property line to form a continuous

structure to screen the private yard of the house.

Height and Massing

The cornice line of single family townhouses may not exceed 35ft in height, or three stories. An optional partial fourth-fifth floor with dormers is allowed provided the building does not exceed 45 ft.* A variety of heights shall be provided, with at least some of the townhouses 35ft or less in height. The ground floor of single family units may be raised a maximum of 5 ft above the sidewalk level.* The cornice line of a stacked townhouse may not exceed 45ft in height, or four stories. The first floor of the stacked townhouses may be depressed 3-5 ft. and the main entrance may be at the second level from a stoop within the front yard setback zone. The front facade may be setback a maximum of 12ft for townhouses with London basements (depressed first floors.) An optional partial fourth/fifth floor may be incorporated with dormers.* Upper floor exterior terraces or balconies are permitted at the rear facade of the building. These may also be permitted on the front facade of a building at the discretion of the Director of Planning and Zoning.* Stacked end units must provide a terrace wall integral to the side wall of the house to screen the private rear terraces from street views.

Parking and Garages

Parking for townhouses is generally accessed from the alley, and is located within enclosed

detached or attached garages, or common garages embedded with the block. Driveways and curb cuts from streets are not permitted, except for those fronting onto George Washington Parkway in Parcel A. "Granny Flats" or auxiliary/rental units are permitted provided that parking is provided and the unit count is part of the total developable residential units. The maximum floor area for "Granny Flats" is 450 sf and may not be more than one level on top of the garage.

Architectural Standards

Fenestration and Roofscape

Exterior openings should be of a vertical proportion of one horizontal to two vertical (1:2). Windows should be primarily double-hung with muntins. Casement windows or other types appropriate to a particular building style are allowed.* Casement windows may be used in bay window features. The side walls of exterior end units should have windows. Townhouses with pitched roofs should have a recommended minimum slope of 8/12 for the main roof. The main roof ridge should be parallel to the street. Mechanical or HVAC units may not be visible from the street. All utilities, including transformers, telephone and cable boxes shall be located in the alleys. Each unit shall be designed to provide for the convenient storage and screening of trash and recycling receptacles.



* Amended November 13, 2010

Materials and Architectural Elements

Townhouses shall be primarily clad in a singular material, either in brick, wood siding, or smooth-finished stucco. Dormers, porches, and bay windows may be in wood, metal, and brick.* Details at the head and sill of windows are strongly encouraged.

Shutters should be widely and correctly used. The use of water tables, belt courses, and ornamentation with brick or stone is encouraged. Maximum height of building bays and bay windows is to be determined at the discretion of the Director of Planning and Zoning.* Chimneys must be clad in brick. Building entries should include special details such as pediments or porches to enhance the distinction of individual units. Towers and cupolas extending above the cornice line are encouraged for the end units. Railings for the front stoops or airway shall be wrought iron, brick, stone, or painted wood or a combination of the above. Wood elements such as railings, fences, balconies and decks shall be painted. No skylights may be seen from the front of the building. (Text deleted per amendments on November 13, 2010)





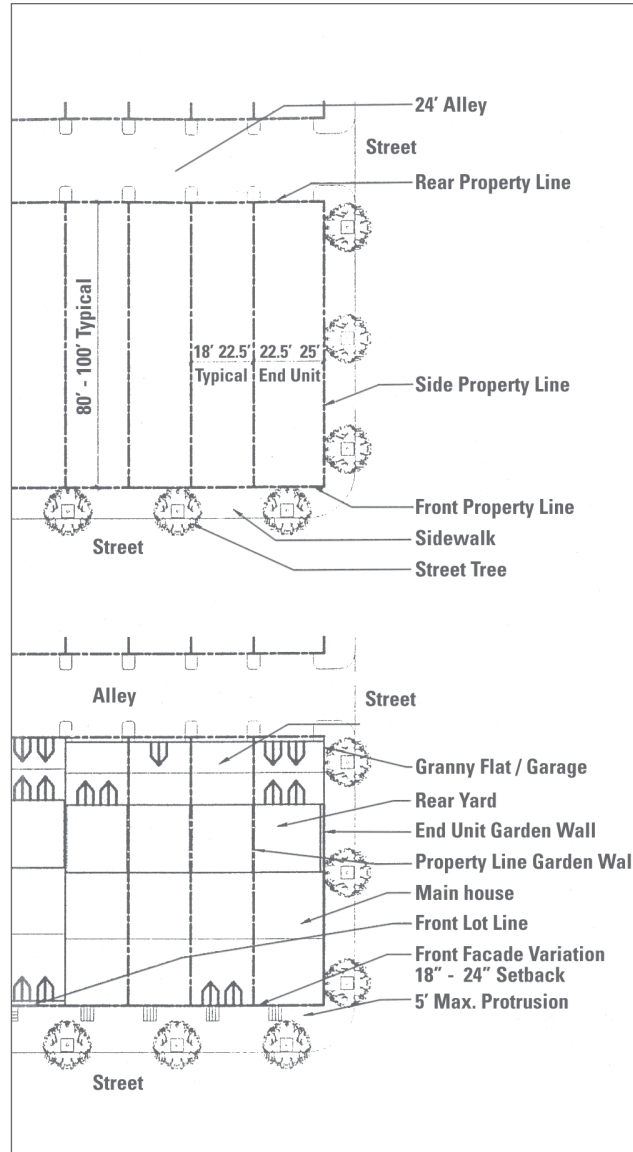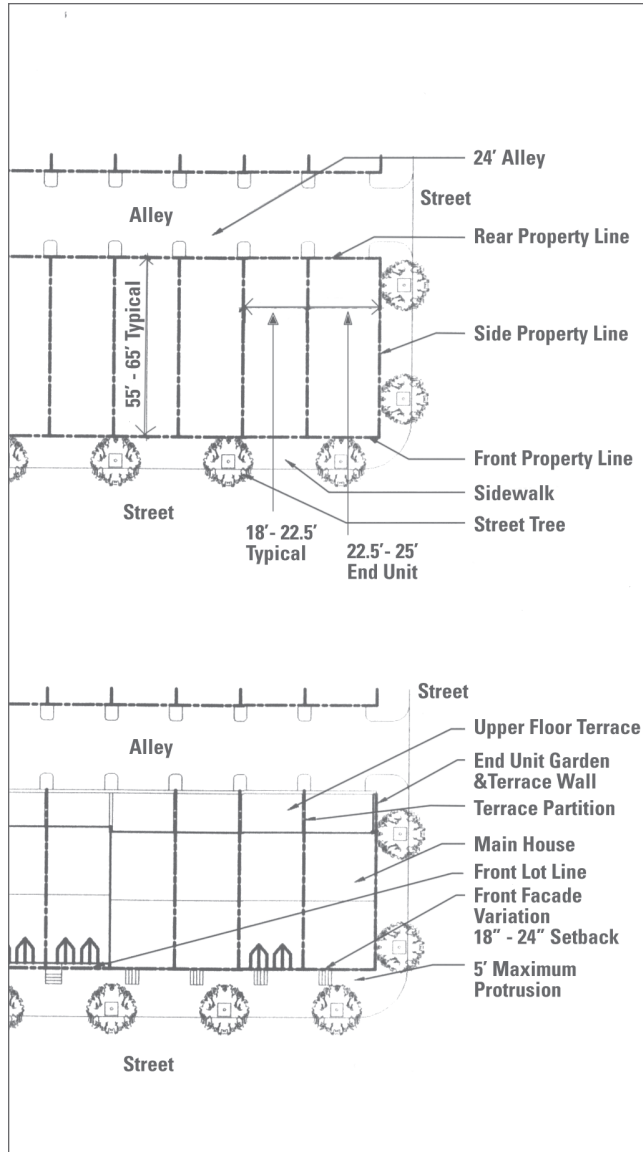

Illustrative Townhouse Lot and Roof Plans





Illustrative Townhouse Sections

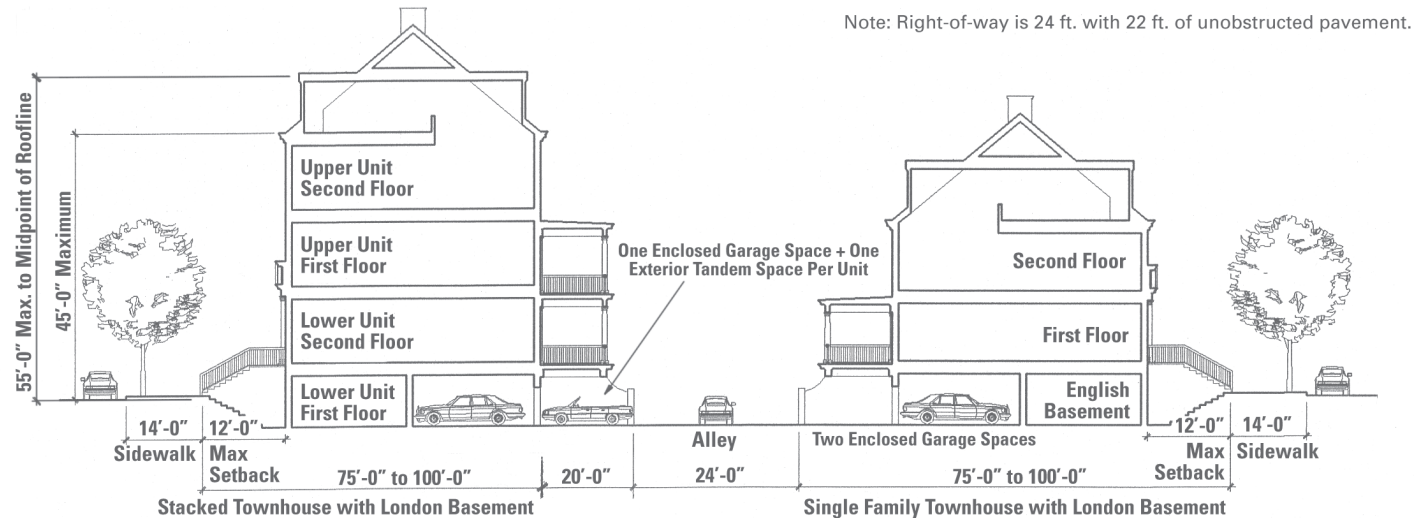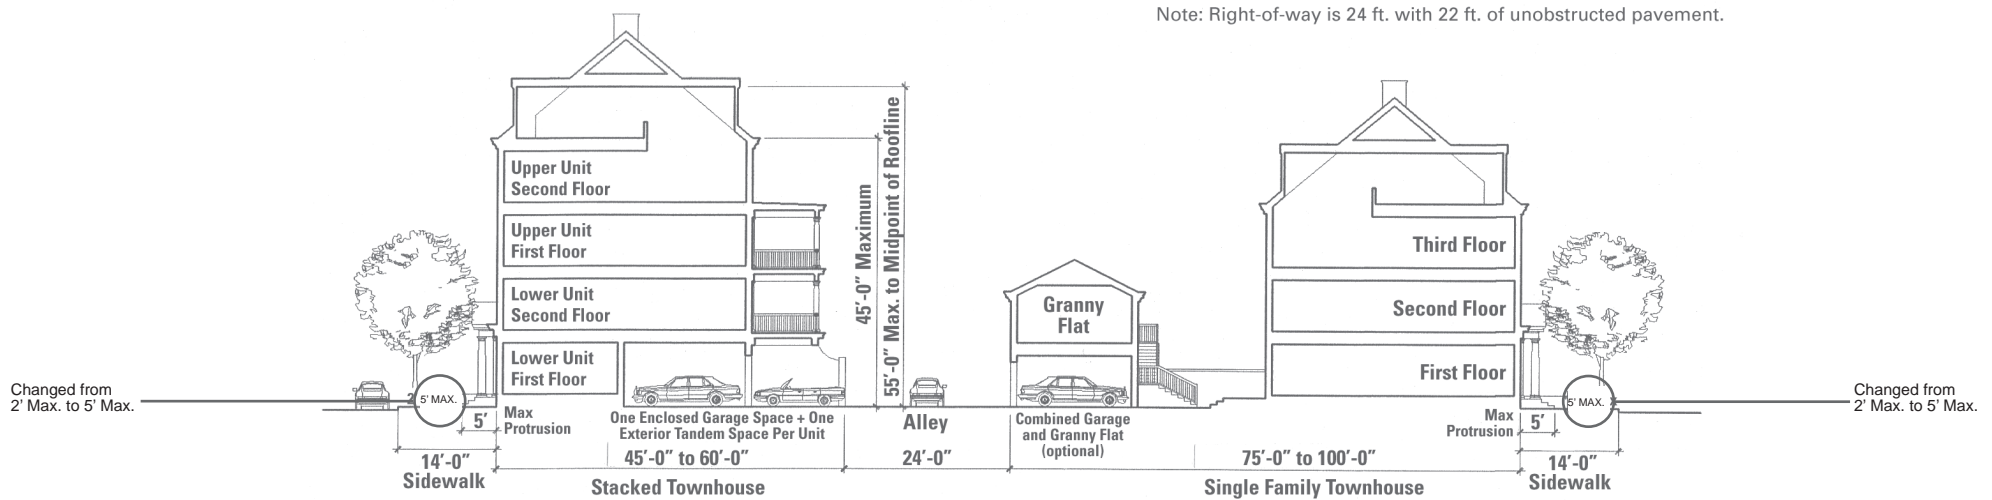

* Amended November 13, 2010

Illustrative Townhouse Sections

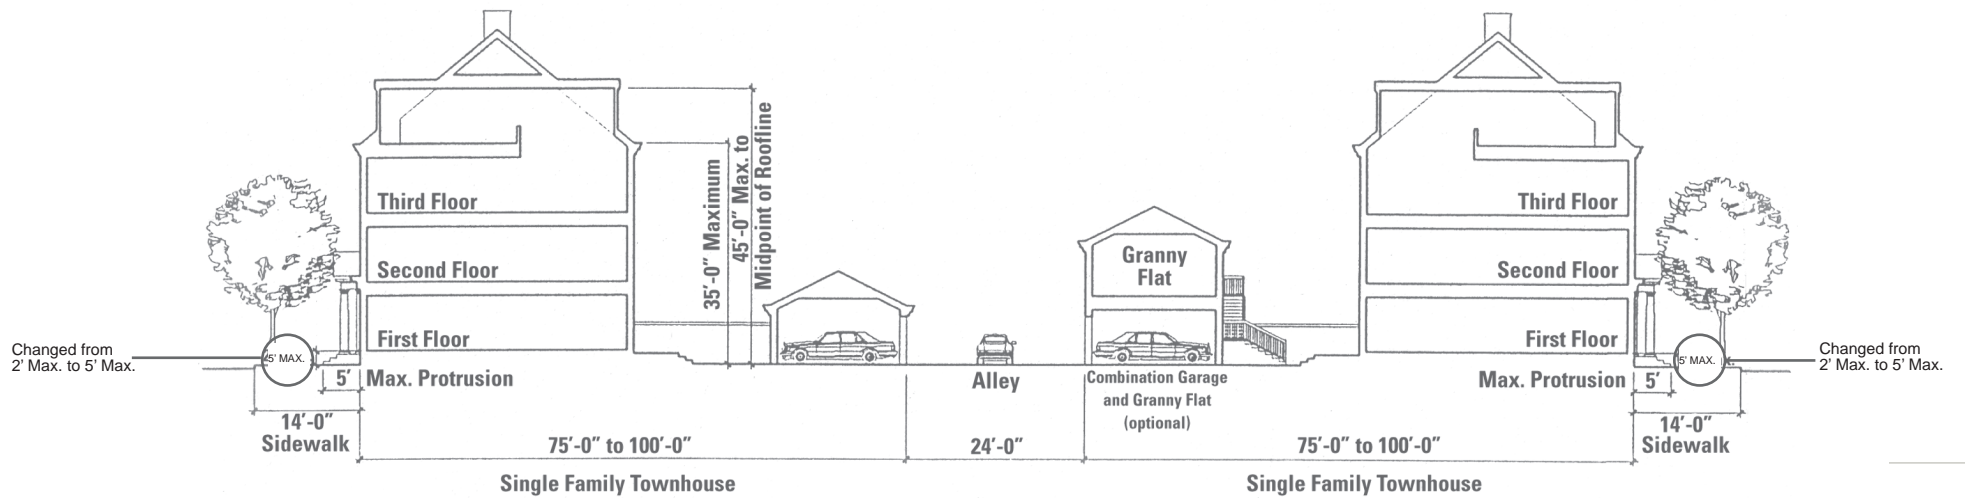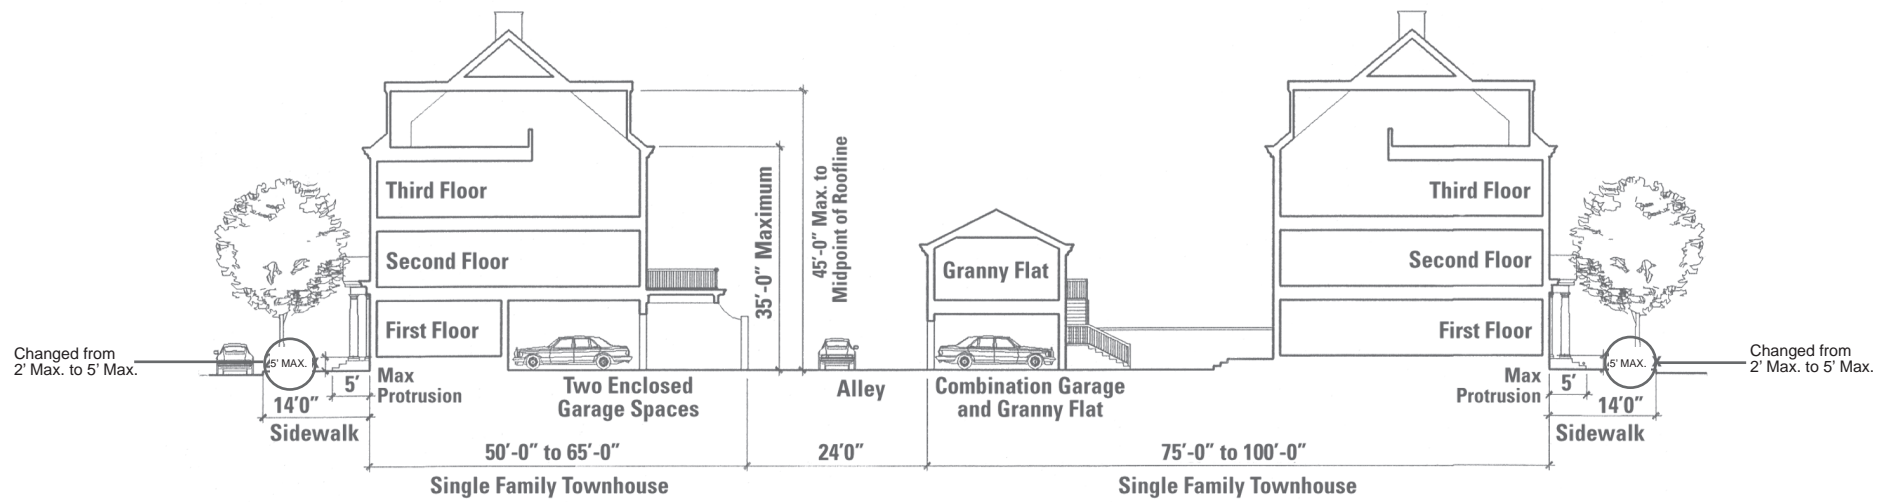

* Amended November 13, 2010

Small Apartment Buildings

Three to four-story multifamily apartment buildings are proposed in this development. Small apartment buildings, when located in the Town Center (Parcel G), along Route 1, or within Parcel L, may be mixed-use with ground floor commercial spaces such as retail or professional offices. (Refer to Mixed-use Apartment Building Guidelines.) These building plans may be organized as a double-loaded corridor with street and courtyard facing units, or a single-loaded corridor with duplex units above ground floor units. Units may be directly accessible from the exterior.



Urban Standards

Frontage and Orientation

Buildings shall have their front facades parallel to the front property line. No less than 80% of the front lot width should be covered by the front facade to provide street wall. Corner lots are considered to have two front lots lines. Buildings on Route 1 shall have no less than 50% of Route 1 lot width covered by the facade. No building shall be more than 165' in length along the front lot line. Small apartment buildings are permitted to have multiple entrances.

Height, Massing and Setback

Buildings should utilize simple geometric shapes in plan and elevation. Buildings shall not exceed 50' in height. Buildings shall be no more than four-stories and no less than three stories. Single use residential buildings' ground floor may be a maximum of 5 ft above grade.* Steps, stoops and porches are encouraged and may protrude into the right-of-way for a maximum of 5ft. When these elements are used in the front facade, a maximum building setback of 12ft is permitted. Awnings, balconies, and bay windows less than 2.5ft in depth may protrude into the right-of-way.

Parking

Underground parking facilities are encouraged at all locations, but small apartment buildings may provide parking at grade in surface lots which are at the rear of the building and enclosed with garden walls.

* Amended November 13, 2010

Architectural Standards

Fenestration and Roofscape




Exterior openings may vary in size and pattern but should be of a vertical proportion of one horizontal to two vertical (1:2). Window to wall ratio of the front facade should be a minimum of 30%.* The roof of the building may be either flat or pitched. The recommended roof pitch is 5/12 to 7/12. The main roof ridge should be typically parallel to the street at the front of the building. Dormers are encouraged as part of the roof structure, if they are used as part of the actual dwelling units. A cornice line or similar expression at the parapet or at the eave of the roof is strongly encouraged.

Materials and Architectural Elements

Buildings shall be primarily clad in a singular material, including brick, wood, or smooth-finished stucco. Belt courses, water tables, stone or brick ornamentation are encouraged. Windows and doors should be of high quality. Details at the head and sill of windows are strongly encouraged. Shutters should be widely used. Building elements such as bay windows, porches, balconies and chimneys are strongly encouraged. Exterior balconies shall not protrude beyond the facade of the building more than 2.5ft in depth, and shall be an integral part of the facade. Architectural features such as towers and cupolas should be used to address corner conditions or special vistas. (Text deleted per amendments on November 13, 2010)

* Amended November 13, 2010

Illustrative Small Apartment Buildings

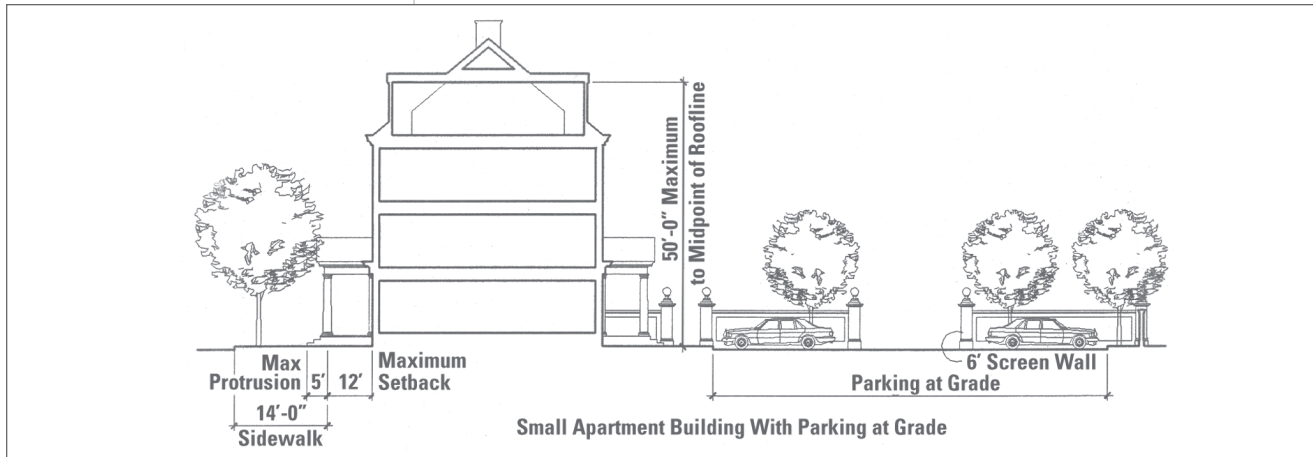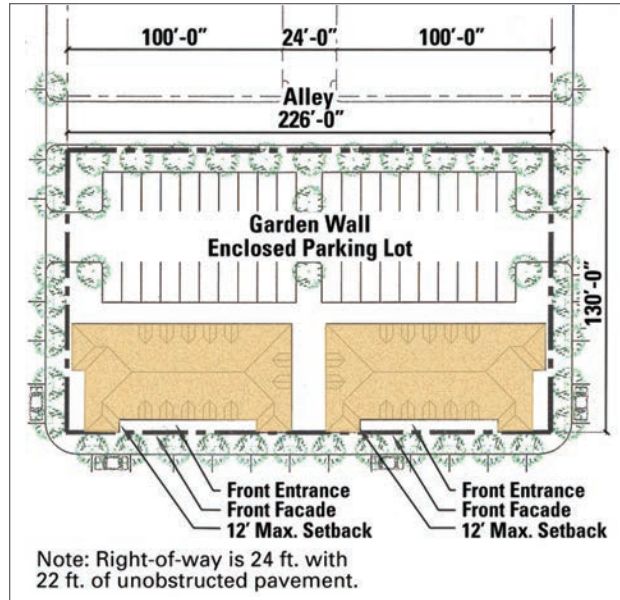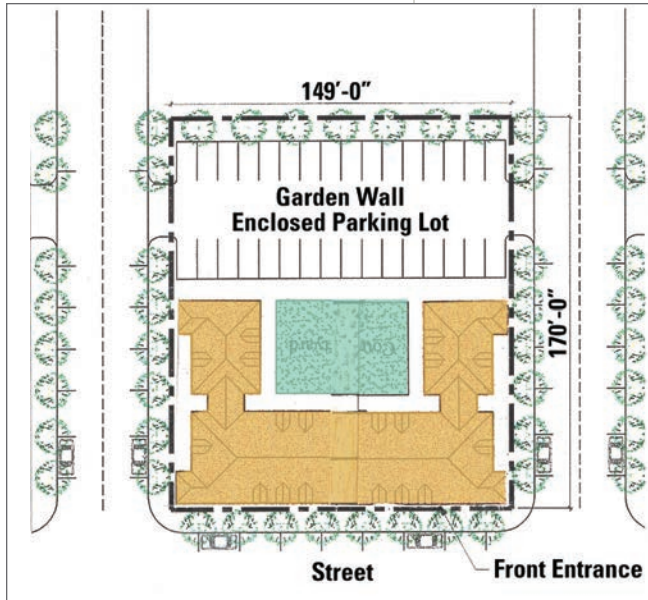

Large Apartment Buildings

Multi-family buildings are proposed in this development in Town Center (Parcel G), along Route 1 near (Parcel H and I), the Route 1 Bridge (Parcel J) and near Monroe Avenue (Parcel L).^{*} Typically five stories, these buildings may be mixed-use with ground floor commercial spaces such as retail or professional offices. (See Mixed-use Apartment Buildings Guidelines.) These buildings are typically organized as double-loaded corridors with street and courtyard facing units having a common main entry.



Urban Standards

Frontage and Orientation

Buildings shall have their front facades parallel to the front property line. No less than 80% of the front lot width should be covered by the front facade to provide street wall. Corner lots are considered to have two front lot lines. Front facades of buildings longer than 200ft shall be articulated to break down the perceived length of the building of scale of the facade. The maximum uninterrupted wall length is 60ft on the front facade before an architectural articulation is required. This can be expressed by recesses or projections of the facade, change of material or color of material, or use of balconies, porches or bay windows. The main entrance to the building shall be at the front facade and articulated as a public entrance.

Height, Massing, and Setback

Buildings should utilize simple geometric shapes in plan and in elevation. Buildings shall not exceed 60 feet in height, except higher heights (up to a maximum of 82 feet) are allowed in Landbays J and L and up to a maximum of 110 feet allowed in Landbay G.

Single use residential buildings' ground floor may be a maximum of 5 ft above grade.^{*} Steps, stoops, and porches are encouraged but may not protrude into the right-of-way more than 5ft. When these elements are used on the front facade, the maximum building setback is 15ft. Awnings, balconies, and bay windows less than 2.5ft in depth may protrude into the right-of-way.

Parking

Underground parking facilities are required for all large apartment buildings. Above-grade parking is permitted if embedded within the block. Parking entrances shall be from the side or the rear of the building. Trash cans, dumpster and free standing equipment must be screened from street views.

Architectural Standards

Fenestration and Roofscape



Exterior openings may vary in size and pattern but should be of a vertical proportion of one horizontal to two vertical (1:2). Window to wall ratio of the front facade should be a minimum of 30%. The roof of the building may be either flat or pitched. Dormers are encouraged as part of the roof structure, if they are used as part of the actual dwelling units.



Materials and Architectural Elements

Buildings shall be primarily clad in a singular material, either in brick, wood, or smooth-finished stucco. When a portion of a facade is clearly articulated as a separate architectural element, such as a wing, a porch, bay windows, or an extension, a material other than the primary one may be used. Windows and doors should be of a high quality. Building elements such as bay windows, porches, balconies, and chimneys are strongly encouraged. Exterior balconies shall not protrude beyond the facade of the building more than 2.5ft in depth, and shall be an integral part of the facade. Architectural features such as towers and cupola should be used to address corner conditions or special vistas. (Text deleted per amendments on November 13, 2010)

^{*} Amended November 13, 2010

Illustrative Large Apartment Buildings

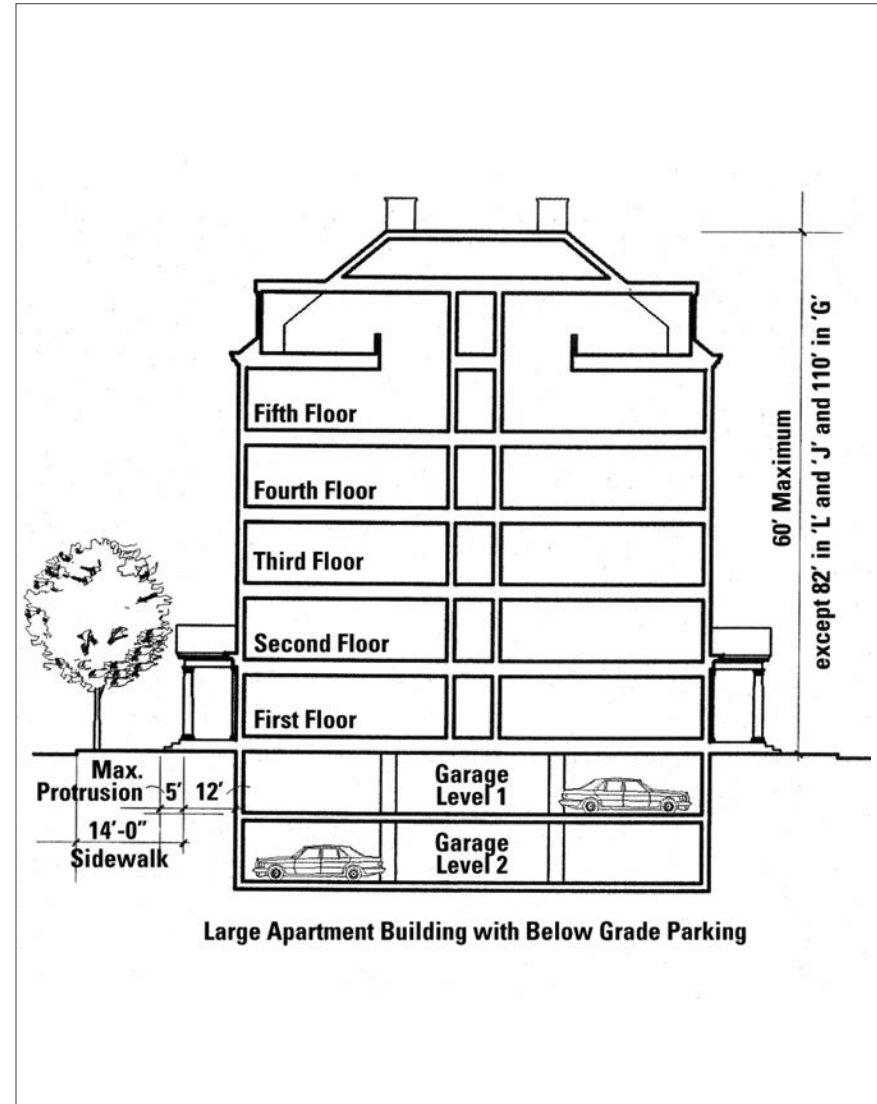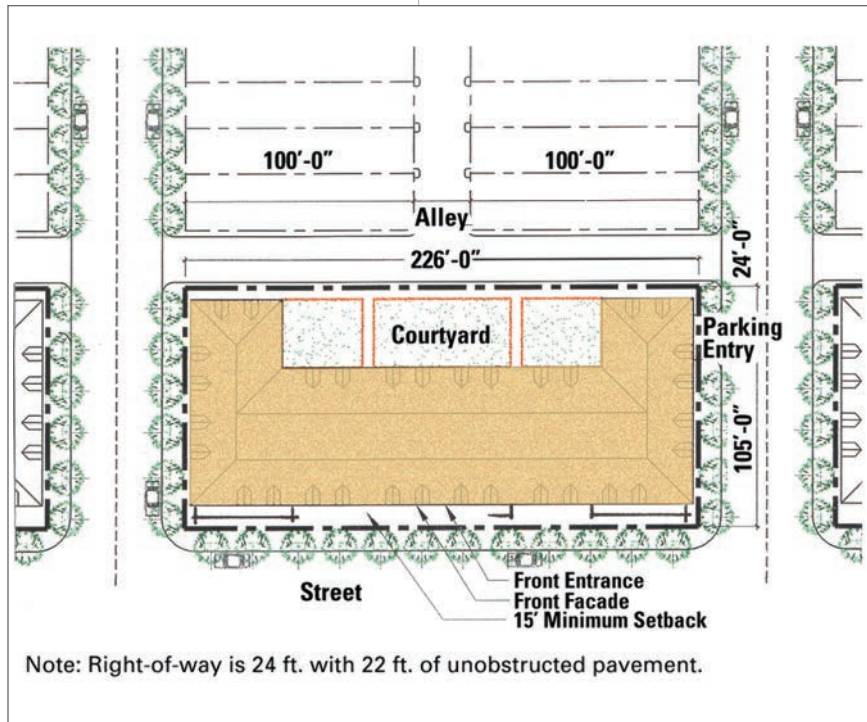

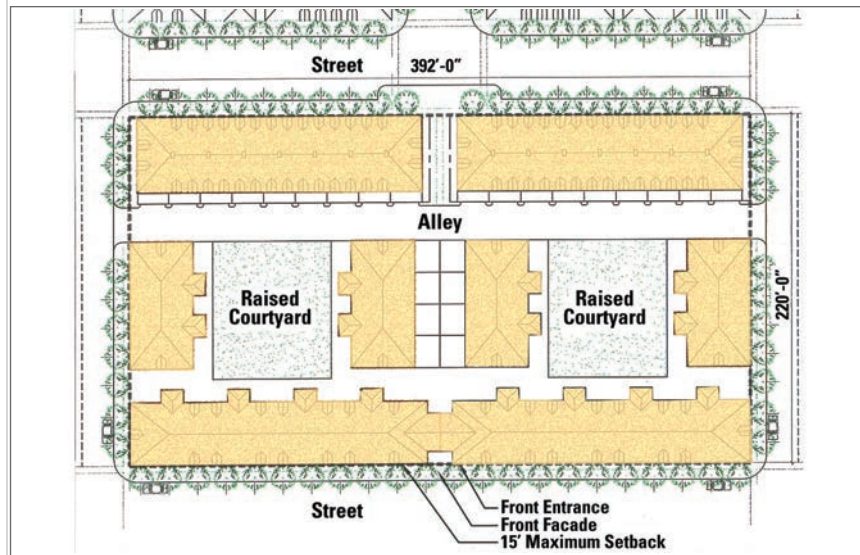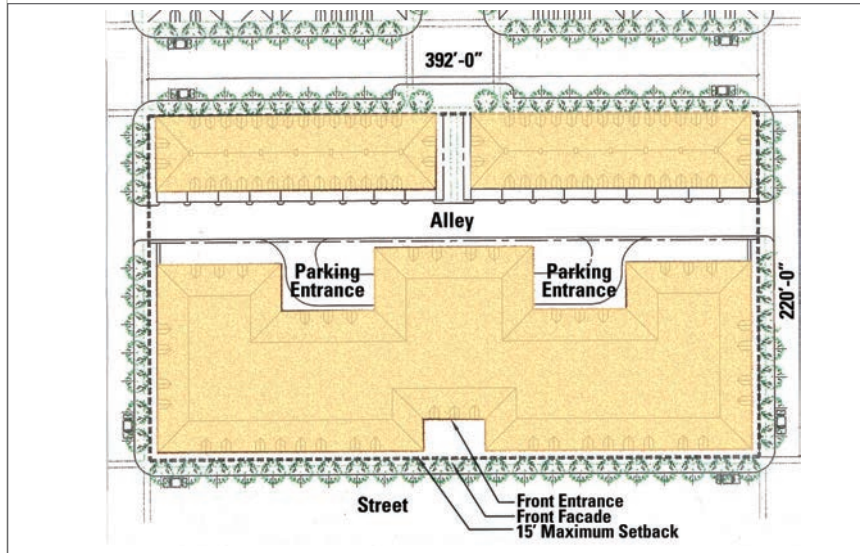

Mixed-use Apartment Buildings

Small and large apartment buildings with mixed uses and housing types are permitted in this development in the Town Center (Parcel G), along Route 1, in Parcel H and I, and near the Route 1 Bridge in Parcels J and L. These buildings are to be built with high ground floor ceiling height to allow for retail or office use, or with mixed housing types such as stacked townhouses or apartment units above.



Urban Standards

Frontage and Orientation

Refer to the Large Apartment Building Guidelines.

Height, Massing, and Setback

Refer to the Large Apartment Building Guidelines, except that the ground floor shall be at the same grade as the sidewalk level. Steps and stoops may only be used at the main building entrance. Awnings at the street level may protrude into the right-of-way for a maximum of 3.5 ft.

Parking and Service

Underground parking or embedded above-ground decked facilities may be used for mixed-use buildings. Multi-family, retail and office buildings shall provide on-site parking with a minimum of one level below grade. If above-ground parking is necessary it shall be fully screened with active uses, such as retail, residential, or office uses.

Parking entrances shall be from the side or rear of the building. Loading areas shall be located and screened to minimize views of such areas from adjacent buildings and streets.

Trash or dumpster enclosures shall be constructed of the same or complimentary material as that of the building.



Architectural Standards

Fenestration and Roofscape

Refer to the Large Apartment Building Guidelines, except that multiple shopfront entrances and oversized window openings are encouraged at the street level. The roof of embedded parking decks shall be developed as landscaped courtyards.

Materials and Architectural Elements

Refer to the Large Apartment Building Guidelines.

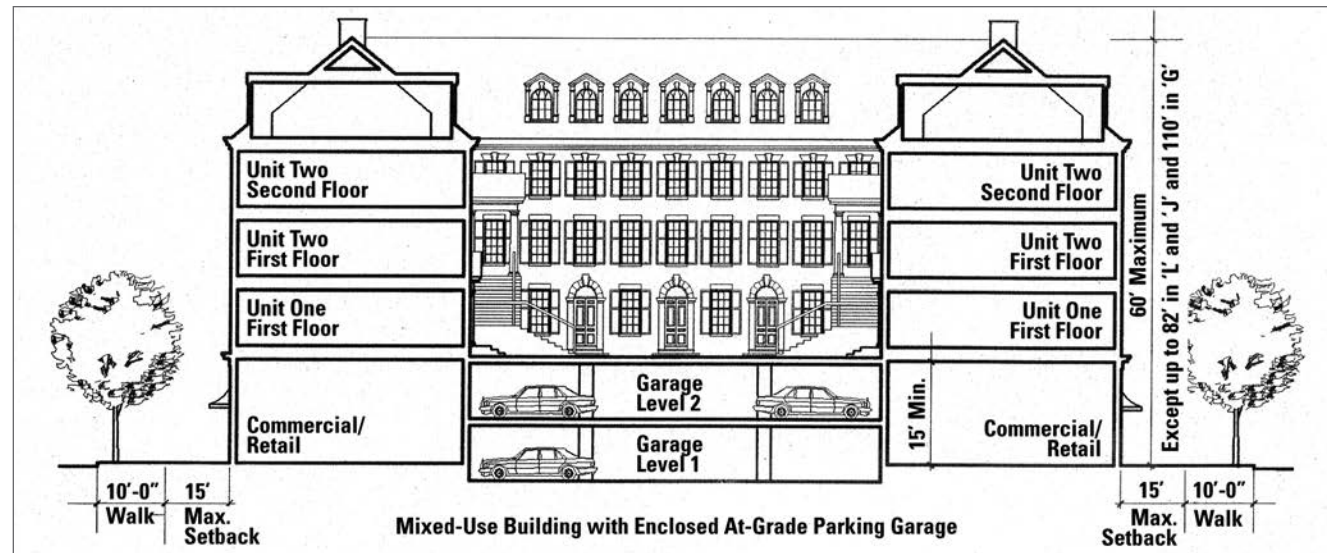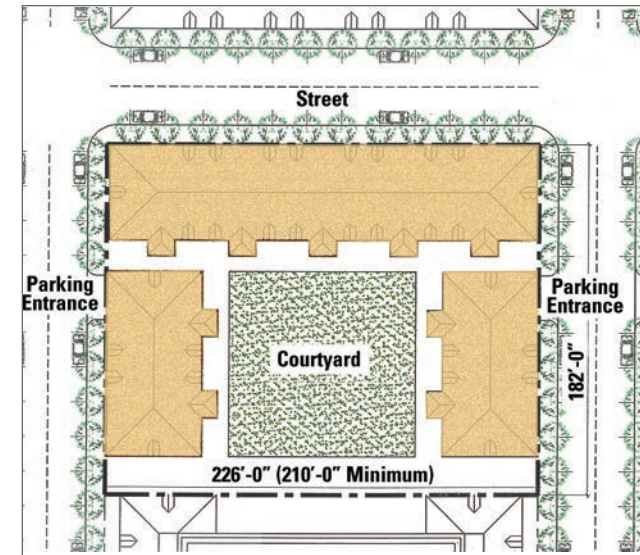

* Amended November 13, 2010



Small Office Buildings

Three-to-five-story small office buildings are proposed in this development. They are mainly to be located along Route 1 and in the Town Center. Similar in scale and character to an apartment building, their floor plates range from 8,000sf to 20,000sf. Retail spaces such as stores, cafes, or restaurants are permitted at the ground floor.

Urban Standards

Frontage and Orientation

Buildings shall have their front facades parallel to the front property line. No less than 80% of the front lot width should be covered by the front facade. Corner lots are considered to have two front lot lines. Small office buildings are allowed to have multiple entrances. No building shall be more than 150ft in length along the front lot line.

Height and Massing

Buildings should utilize simple geometric shapes in plan and elevation. The front facade shall be built parallel with the lot line. Buildings shall not exceed five stories, nor shall they be less than three stories, and shall not exceed 65ft in height.

Parking

The majority of required parking shall be in underground facilities. Surface parking lots are to be located at the rear of the building and enclosed with walls.

Architectural Standards

Fenestration and Roofscape





The proportion of glass to wall shall allow for contemporary styles and materials.* Recessed exterior openings to simulate traditional load-bearing masonry punched-opening facades are strongly encouraged. Strip or ribbon windows are not permitted. Reflective or darkly tinted glass are not permitted. The roof of the building may be either flat or pitched. A cornice or similar expression is required either at the parapet or at the eaves of the roof. Roof gables can be parallel or perpendicular to the street at the front of the building. Building wings and additions should have similar forms, roof pitch and character to the main body of the building. Mechanical or HVAC units may not be visible from the street.

Materials and Architectural Elements

Buildings should be predominately clad in a singular material, including brick, stone, or smooth-finished stucco. Trim materials may be of cast stone or metal. Architectural elements such as awnings, window boxes, and balconies are encouraged.

* Amended November 13, 2010

Illustrative Small Office Buildings

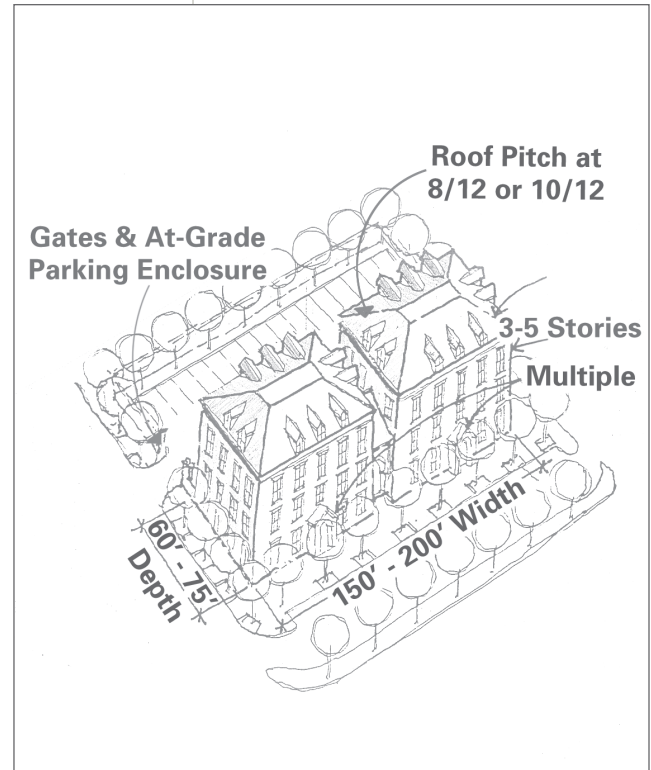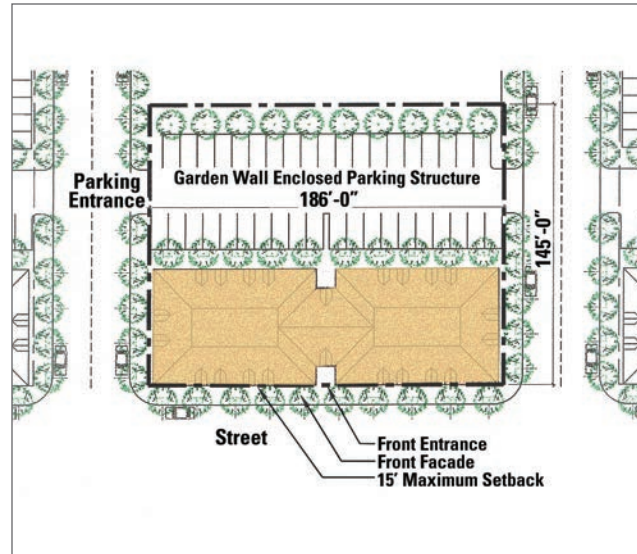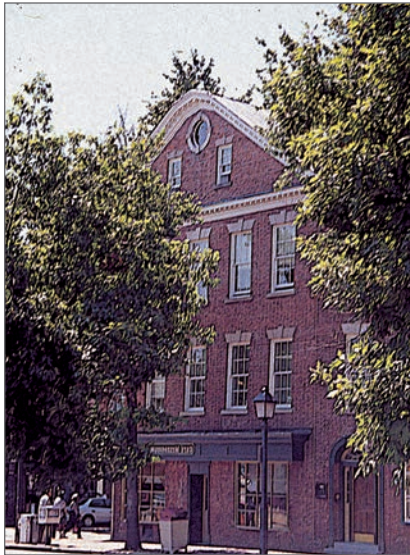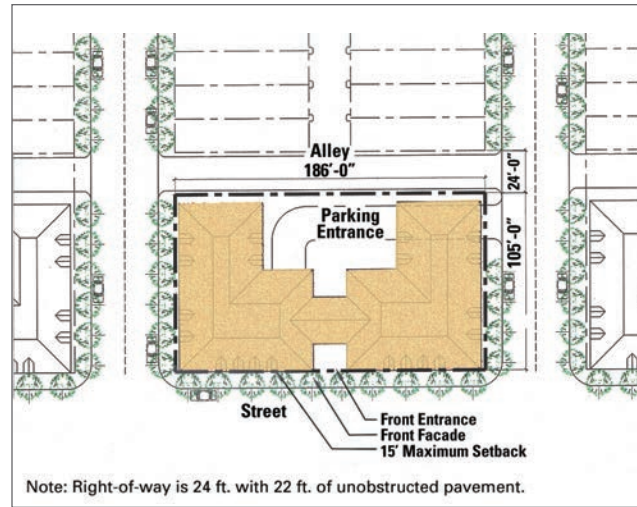

Medium-sized Office Buildings

Five-to-eight-story office buildings are proposed in this development. They are to be located in the Town Center and near the Route 1 Bridge and the newly extended Monroe Avenue. Their floor plates range from 15,000sf to 40,000sf. All of the office buildings are permitted to have retail space such as stores, cafes, or restaurants at the ground floor.



Urban Standards

Frontage and Orientation

Buildings shall have their front facades parallel to the front property line. No less than 80% of the front lot width should be covered by the front facade. Corner lots are considered to have two front lot lines. The main entrance to the building shall be at the front facade and articulated as a significant public entrance. Buildings surrounding the Town Green in the Town Center will be required to have retail for the entire front facade except for the building lobby entrances. The orientation of a group of buildings in the Town Center should create a positive spatial definition and be an integral part of the Town Center overall design. Buildings longer than 200ft along the front facade shall be articulated with vertical recesses or projections to break down the scale of the facade.

This can be expressed by recesses or projections of the facade, or by a change of material.

Height and Massing

Buildings should utilize simple geometric shapes in plan and in elevation. The front facade shall be built parallel with the lot line. Buildings shall not exceed eight stories, nor shall they be less than five stories. In Town Center (Parcel G), building height up to 110ft is permitted for seven buildings, in addition to the hotel. In Parcel J, building height up to 82ft is permitted for five buildings. In Parcel L, building height up to 82ft is permitted for two buildings. Setbacks on the upper floors are encouraged, and can be used for balconies or terraces. Horizontal

expressions such as a frieze band are strongly encouraged as architectural expressions.

Parking and Service

The majority of required parking shall be provided in underground facilities. Surface parking lots are to be at the rear and enclosed with walls. Any above-ground parking shall be fully screened with active uses, such as retail, residential, or office uses.* Loading areas shall be located in the back of the building and screened to minimize views from adjacent buildings and streets. Trash or dumpster enclosures or adjacent free-standing equipment must be screened on all sides and from above.

Architectural Standards




Fenestration and Roofscape

Exterior openings should be proportionately appropriate for the building function and compatible with the adjacent development. Recessed exterior openings to simulate traditional load-bearing masonry punched-opening facade are strongly encouraged. The use of reflective or darkly tinted glass shall be restricted. The roof of the building may be either flat or pitched. A cornice or similar expression is encouraged either at the parapet or at the eave of the roof. Building wings and additions should have similar forms, roof pitch and character to the main body of the building. Mechanical or HVAC units may not be seen from the street.

Materials and Architectural Elements

Buildings should be predominately clad in masonry material, including brick, stone, stucco, or precast panels. Trim materials may be of stone, metal, or similar material. Architectural elements, such as awnings, window boxes, and balconies are encouraged.

* Amended November 13, 2010

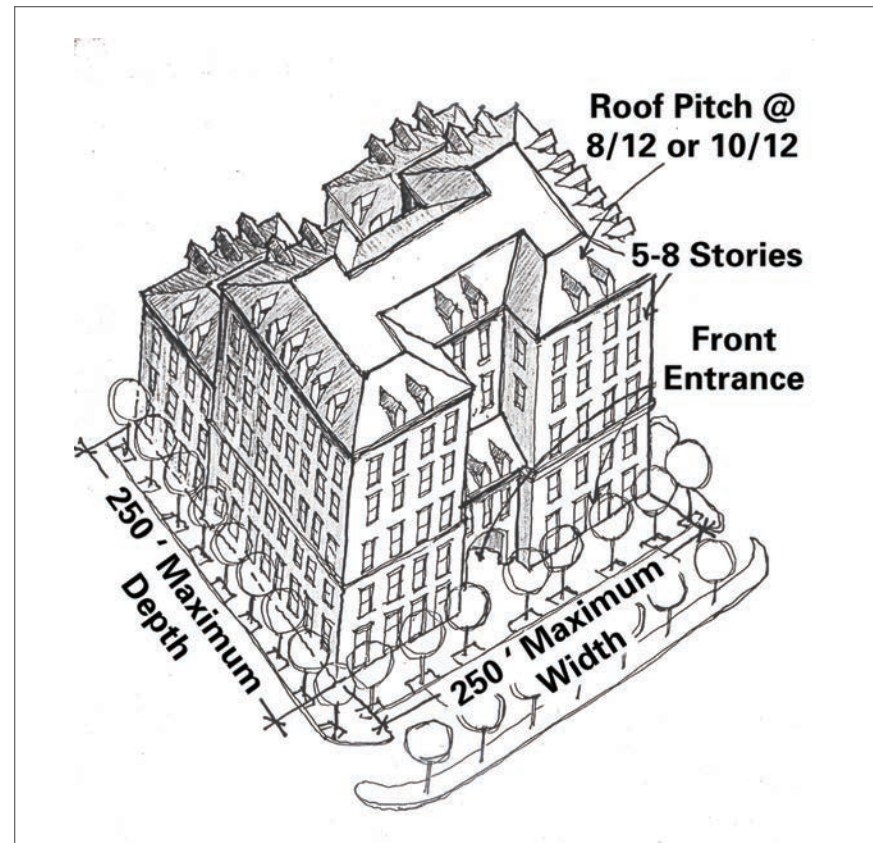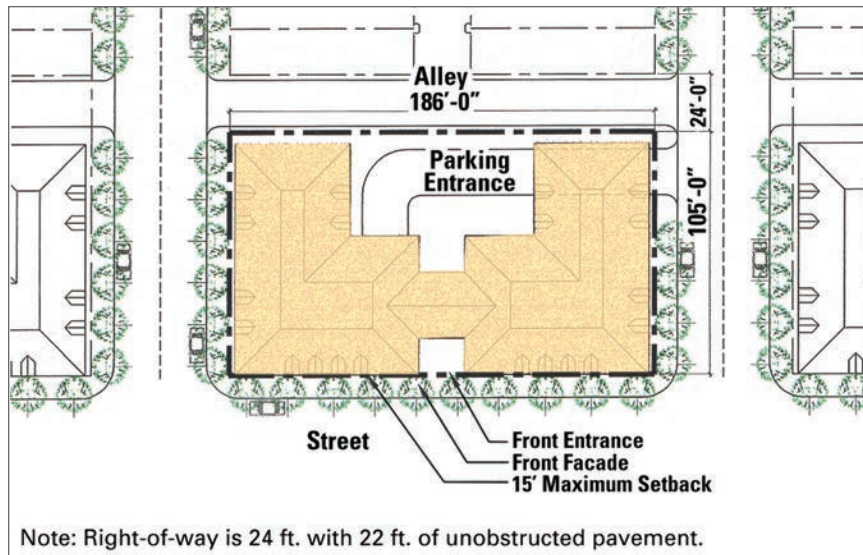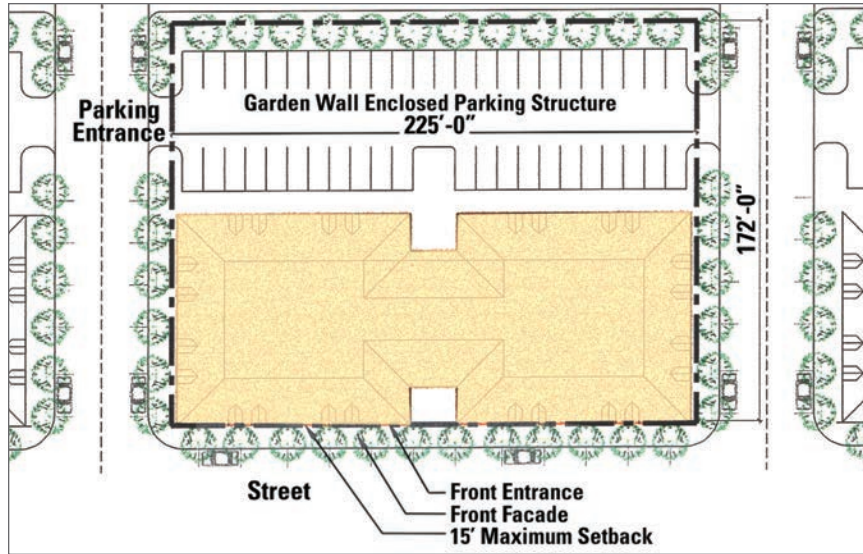

Hotel

A 625-room hotel is located in the Town Center (Parcel G). The hotel should be designed as the signature building in the Town Center providing spatial definition and a visual anchor.

Urban Standards

Frontage and Orientation

Refer to the Large Apartment Building Guidelines, except that the front facade may be a maximum of 350ft in length. The maximum uninterrupted wall length in the front facade is 60ft before an architectural articulation is required. This can be expressed by recesses or projections of the facade, change of materials, or the use of balconies, porches or bay windows. The main entrance to the hotel shall be at the front facade and articulated as a major public entrance.

Height, Massing, and Setback

Refer to the Large Apartment Building Guidelines. In addition, the first and second floor shall be built with higher ceiling heights (16ft recommended) to accommodate retail and other public functions.

The building should utilize simple geometric shapes in plan and in elevation. The main body of the building may not exceed 110ft in height up to the midpoint of the roof structure. The wings of the building may not exceed 80ft in height.

Parking and Service

Underground parking or embedded above-grade decks are required for the hotel. Auxiliary at-grade parking of

20 maximum spaces are permitted at the rear or sides of the hotel. Parking entrances shall be from the side or rear of the building. Loading areas shall be located and screened to minimize views of such areas from adjacent buildings and streets. Trash and dumpster equipment enclosures or adjacent free-standing equipment enclosures shall be constructed of the same or complimentary material as that of the building, and must be screened on all sides and from above.

Architectural Standards

Fenestration and Roofscape

Refer to the Large Apartment Building Guidelines.

Materials and Architectural Elements

Refer to the Large Apartment Building Guidelines, except that the first two floors of the building shall be clad primarily in stone and articulated as a base to be differentiated from the upper floors through the use of a frieze band or change in fenestration proportions.

The roof of the parking deck shall be landscaped as a garden court. Free standing ancillary uses and small mechanical or garden structures on the roof deck must be pitch-roofed.



Summary of Building Criteria

		Townhouses	Stacked Townhouses	Small Apart. Bldg.	Large Apart. Bldg.	Mixed-use/ typ Apart. Bldg.	Small office Bldg.	Medium Office Bldg.	Hotel
Lot	Typical Lot Sizes	18'-25' by 55'-100'	18'-25' by 55'-100'	150'-200' by 120'-200'	180'-250' by 120'-200'	150'-250' by 120'-200'	150'-200' by 100'-120'	150'-200' by 120'-180'	200'-250' by 250'-350'
	Typical Coverage	45-80%	45-80%	70%	70%	70%	70%	70%	60%
Front Facade	Front Lot Line Coverage	100%	100%	80%, 60% on Route 1	80%	80%	80%, 60% on Route 1	80%	80%
	R.O.W Protrusion*1	5' max	5' max	5' max	5' max	5' max	5' max	5' max	5' max
	Front facade Max. Setback when steps, stoops, or porches are used	n/a	n/a	12'	15'	15'	n/a	n/a	n/a
	Max. Length before Break	n/a	n/a	150'	200'	200'	150'	250'	300'
	Max. Front Facade Wall Length before Articulation	n/a	n/a	n/a	60'	60'	n/a	n/a	60'
Height	Approximate Number of Stories	3-3 1/2 stories	4-4 1/2 stories	3-4 stories	5 stories or higher	3-5 stories	3-5 stories	5-8 stories	6-8 stories
	Max. Height at Cornice Line	35'	45'						
	Max. Height	45', variety required	55', variety required	50'	Typically 60', higher permitted in Parcels G, J and L	Typically 60', higher permitted in Parcels G, J and L	65'	80'-110'	110'
Ground Floor	Ground Floor	may be raised 5' or depressed 3-5'	may be raised 5' or depressed 3-5'	may be raised 18-24 in.	may be raised 18-24 in.	must be at sidewalk level	must be at sidewalk level	must be at sidewalk level	16' fl to ceiling ht recommended
	Main Entrance	at front facade	at front facade	multiple entrances permitted	at front facade	multiple entrances permitted	multiple entrances permitted	at front facade	at front facade
	Parking*2	attached, detached or common	attached, detached or common	underground or at grade	underground or embedded	underground or embedded	underground or at grade	primarily underground with some at grade	underground or embedded
Architecture	Fenestration Proportion	1 horizontal to 2 vertical	1 horizontal to 2 vertical	1 horizontal to 2 vertical	1 horizontal to 2 vertical	oversized at street level	punched openings	punched openings	punched openings and oversized at street level
	Fenestration % to Wall			30% min, 50% max	30% min, 50% max	30% min, 50% max			
	Roof	8:12	8:12	flat or pitched	flat or pitched	flat or pitched	flat or pitched	flat or pitched	flat or pitched
	Materials	brick, wood, stucco	brick, wood, stucco	brick, wood, stucco	brick, wood, stucco	brick, wood, stucco	brick, stone, stucco	brick, stone, stucco	brick, stone, stucco
	Recommended Min. Architectural Expression	cornice line	cornice line	cornice line	cornice line	frieze band between 1st and 2nd floors, cornice line	cornice line		Rusticated articulation for 1st and 2nd floors

*1 All encroachments into the right-of-way shall follow city code 3'-4' encroachments for certain sized stoops and stairs, depending on the width of the R.O.W. are permitted by right. Additional encroachments, up to the 5' maximum permitted by these guidelines, require approval of a city encroachment ordinance. It is recommended that a comprehensive encroachment ordinance for the project be requested by the applicant.

*2 Embedded parking shall be setback from the building wall a minimum of 20 ft. Where retail use is proposed in the space, a minimum depth of 30ft. shall be provided.

This page intentionally left blank.

Section 5: Landscape Guidelines



All landscaping to comply with City Landscape Guidelines.

This page intentionally left blank.



Streetscape Standards: Street Trees and Associated Street Plantings

Plant Material Quality and Size

All plantings and installation methodologies shall conform to the City of Alexandria standards and as defined by this guideline. Plants shall be nursery-grown in accordance with the latest editions of USA Standards for Nursery Stock. Unless otherwise noted within this guideline, street trees shall be at least 3" to 3 1/2" caliper and shall begin branching no less than 5 1/2 feet from the base. Ground covers shall be established, well-rooted, in containers with no less than the minimum number and length of runners required but ANSI 260-1 for pot size used. Plants shall be sized and spaced such that ground plane coverage is 90% complete within two years of installation.

Consistency – Spacing and Species

Using a variety of street tree species at Potomac Yard is encouraged. However, each individual street shall be planted with one tree species throughout its entire length. Each species shall be installed at sizes uniform in caliper and height. North–South streets must maintain size uniformity for a distance of at least one full block.

East –West street planting must be uniform throughout the entire length of the street. Tree spacing shall also be consistent on each individual street with some allowance for conflicts with drive entrances, alleys, and underground services. With the exception of the Core Streets, the design intention is to provide a different tree species on every street. However, duplication of a particular species is permitted as long as duplication does not occur on consecutive parallel streets (repetition may not occur within a two-block span).

Tree Pits


Unless otherwise noted, sidewalks shall be located immediately adjacent to back of curb with street trees centered in tree pits. Tree pits shall be 4' by 10' in size with the long dimension oriented parallel to the street.

Core Street Tree

The same species of street tree shall be used for Main Street, South Main Street, East Glebe Road, Swann Avenue, Custis Avenue, and Howell Avenue. This tree shall be selected from the Broad Street Tree list and will be referenced within this guideline as the "Core Street Tree". Spacing of the "Core Street Tree" shall be no less 25' apart, with an average spacing of 35' on center.

Main Street and South Main Street

Main Street and South Main Street shall be planted with the "Core Street Tree", consistently spaced on both sides of the street throughout the entire length of the corridor. Main Street shall have sidewalks immediately adjacent to the back of the curb with street trees planted in tree pits. Street trees located along the east side of South Main Street (south of Howell Avenue) shall be planted consistently offset three feet from back of curb. Since there is not a sidewalk on the east side of South Main Street, the ground plane shall be developed as a continuation of the Potomac Yard Park design.

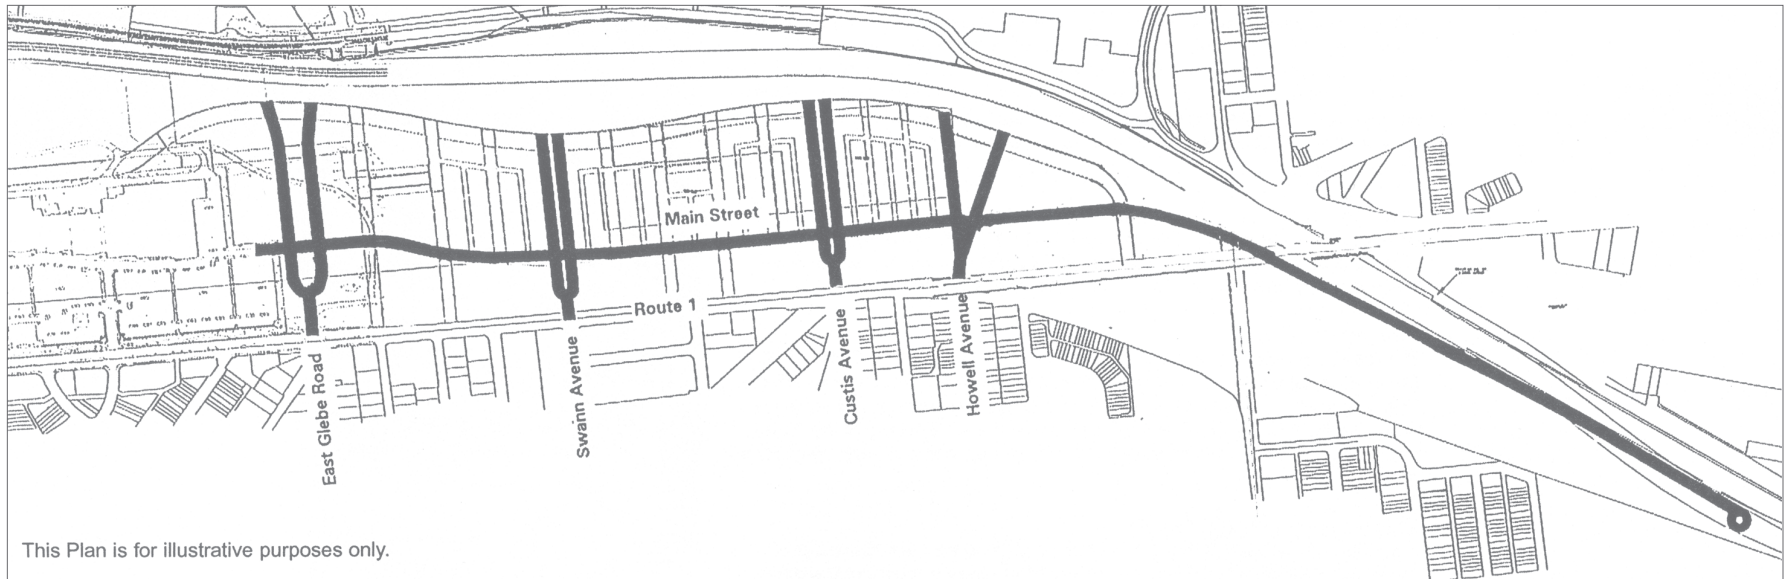

East Glebe Road and Swann Avenue (with Finger Parks)


East Glebe Road and Swann Avenue shall be planted with the “Core Street Tree”, consistently spaced on both sides of the street throughout the entire length of each street. A double row of street trees shall be planted on the Finger Park side of the street. The first row shall be centered in a six foot continuous planting strip located immediately adjacent to the curb. A six foot wide sidewalk shall be located next to the planting strip. The second row of street trees will be offset three feet from the inside edge of sidewalk, centering the sidewalk between the double row of trees. The double tree row with sidewalk shall be installed on both sides of each finger park. The ground plane of the planting strip and park shall be lawn. The building side of the street shall be planted with a single row of trees in tree pits.

Howell Avenue

Howell Avenue shall be planted with the “Core Street Tree”, consistently spaced on both sides of the street. Except for street edges adjacent to Howell Park, street trees shall be planted in tree pits. Street edges facing Howell Park shall be planted with a single row of the “Core Street Tree”, offset three feet from back of curb. Ground plane treatment shall be consistent with the Howell Park Design.

Route 1 Corridor

Within the Route 1 corridor south of Howell Avenue, trees shall be Ginkgo Biloba matching existing street trees near Monroe Avenue. Street trees along the west edge of Route 1 and the Route 1 median shall be consistent in spacing and be of the same species from Howell Avenue to the Potomac Yard Retail Center. Tree spacing shall be no less than 25’ apart, with an average spacing of 35’ on center. Tree species shall be one of the specified Broad Deciduous Street Trees. The Route 1 median and the median between Route 1 and the access road shall be a continuous planting strip with street trees and lawn/ground cover. East of the access road, sidewalks shall be immediately adjacent to the back of curb with street trees planted in tree pits. Tree pits shall be planted consistently with one of the tree pit ground covers specified.

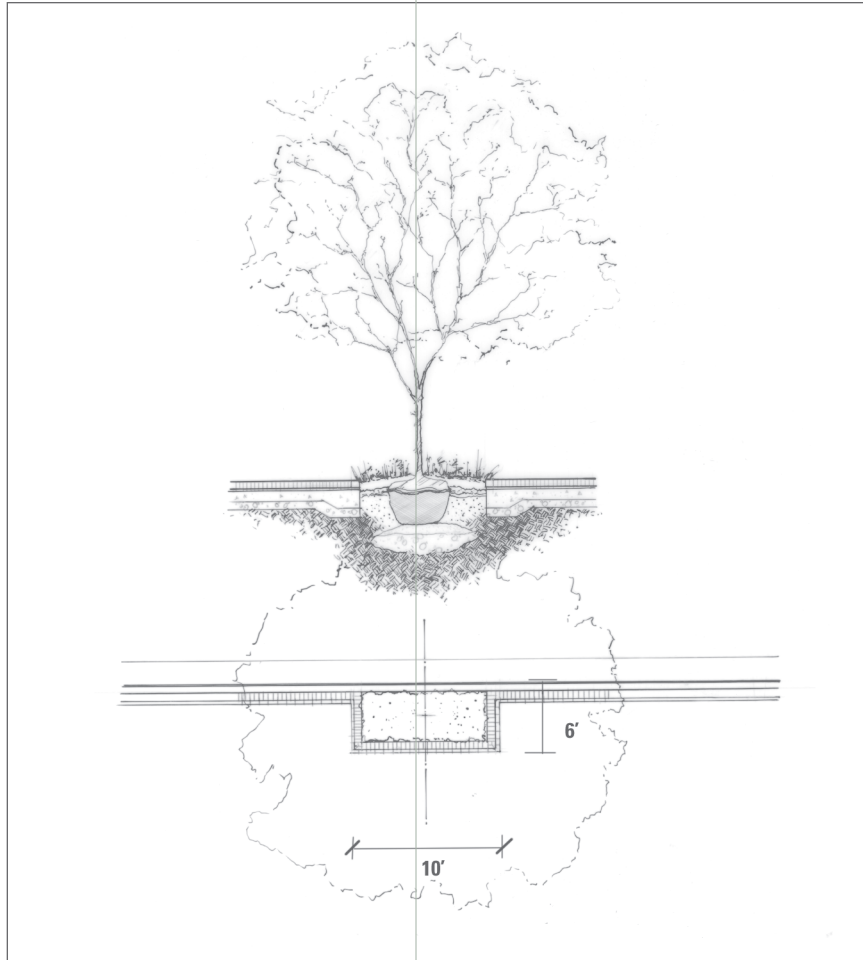

Potomac Avenue

Potomac Avenue shall have street trees planted on the east side, west side, and median. Trees shall be planted with consistent spacing and be of the same species through the entire length of the corridor. Tree spacing shall be no less than 25' apart, with an average spacing of 35' on center. Tree species shall be one of the specified Broad Deciduous Street Trees. Street trees located along the east side of Potomac Avenue shall be planted consistently offset three feet from back of curb. Since there is not a sidewalk on the east side, the ground plane shall be developed as a continuation of the Potomac Yard Park design. The median shall be developed as a continuous planting strip with street trees and lawn/ground cover. Sidewalks on the west side of the street shall be immediately adjacent to the back of curb with street trees planted in tree pits. Tree pits shall be planted consistently with one of the tree pit ground covers specified.

Typical Residential Streets

Each of the Typical Residential Streets shall be planted with one of the Broad Street Trees, one species per street, each street with a different species. However, duplication of a particular species is permitted as long as duplication does not occur on consecutive parallel streets (repetition may not occur within a two-block span). Tree spacing shall be no less than neighborhood parks about the street, all typical residential streets shall be developed with sidewalks located immediately adjacent to back of curb. Street trees shall be planted in tree pits with ground cover.

Alleys

Non-paved surfaces located within alley right-of-ways shall be planted and maintained by adjacent property owner. These spaces shall remain as green spaces. A variety of plantings and design is encouraged.



Recommended Street Planting List

Core Street Trees

- Quercus phellos Willow Oak
- Quercus palustris Pin Oak

Deciduous Street Trees-Broad Streets

- Acer rubrum 'October Glory' October Glory Red Maple
- Ginkgo biloba Maidenhair Tree
- Nyssa sylvatica Black Gum
- Platanus x acerifolia 'Bloodgood' London Planetree
- Quercus coccinea Scarlet Oak
- Quercus palustris Pin Oak
- Quercus phellos Willow Oak
- Quercus rubra Northern Red Oak
- Ulmus parviflora Lacebark Elm

Deciduous Street Trees-Narrow Streets

- Acer rubrum 'Armstrong' Armstrong Red Maple
- Ginkgo Biloba 'Magyar' Magyar Upright Ginkgo
- Tillia cordata 'Greenspire' Little Leaf Linden

Median Ground Covers

- Cotoneaster horizontalis Rock Contoneaster
- Gaultheria procumbens Wintergreen
- Hedera helix English Ivy
- Hedera helix 'Baltica' Baltic Ivy
- Juniperous horizontalis cultivars Creeping junipers
- Vinca minor Periwinkle
- Lawn (see Lawns)

Tree Pit Ground Covers

- Liriope muscari Lilyturf
- Liriope spicata Creeping Lilyturf
- Ophiopogon japonicus Mondo Grass
- Pachysandra terminalis Japanese Spurge
- Vinca minor Periwinkle



Sidewalk Paving

Continuous Pedestrian Circulation System

Pedestrian circulation throughout the site shall be continuous. Sidewalks shall align with one another and connect to park trails and pathways, providing an unbroken circulation system. Unless otherwise noted, all streets shall be bordered with sidewalks. Except in parks, sidewalks shall be placed immediately adjacent to back of street curb with openings in the sidewalk to accommodate tree pits. Pedestrian pathways through parks shall serve as extensions to the street sidewalk system. These pathways shall always abut street curbs at intersections, aligning with crosswalks.

Accessibility

Sidewalks shall be constructed in accordance with all local, state, and national regulations including the latest ADA regulations. Accessibility ramps shall be provided at all street corners in accordance with the City of Alexandria standards.

Crosswalks

Crosswalks shall be delineated at every intersection except where noted along Route 1 and Potomac Avenue. Signalized pedestrian crosswalks along Route 1 shall be provided at the intersections with East Glebe Road, Swann Avenue, Custis Avenue, Howell Avenue and a selected location at Simpson Field and Monroe Avenue if approved by the City. Signalized pedestrian crosswalks along Potomac Avenue shall be located at East Glebe Road, Swann Avenue, Custis Avenue, Howell Avenue, and in front of the Hoyts Theaters, if approved by the City. Other signalized crosswalks (pedestrian only) may be allowed where the distance between crosswalks exceeds 800 feet.

Concrete Sidewalks

Concrete sidewalks shall conform to the City of Alexandria standards and include color additive per District of Columbia standard sidewalks "lamp black" as specified by the District of Columbia Standard Specifications for Highways and Structures.

Brick Sidewalks

Brick used for sidewalks shall be consistent throughout the project except for special spaces such as the Town Center and urban plazas. Compressive strength shall not be less than 10,000 pounds per square inch for any five bricks tested. Tolerances shall conform to the most current ASTM Designation C-902. Brick pavers shall be wire cut with sand swept hand tight joints. Base materials shall be designed to withstand light vehicular traffic. Design shall include a concrete base with bituminous setting bed per brick manufacturer's recommendations.


Pedestrian Through Block Connections

There shall be pedestrian connections extending the existing Del Ray grid across Route 1 and through the first Potomac Yard block to Main Street. Pedestrian connections shall be provided along proposed streets or as "through block connections". These mid-block pedestrian connections shall be six foot wide concrete sidewalks within a minimum 20' wide right-of-way. Pedestrian through block connections shall always align with Del Ray street grid.

Paving Systems

Route 1 Sidewalks


All sidewalks located along the east edge of Route 1 shall be concrete. Sidewalks shall be at a minimum of 15' wide, located immediately adjacent to the curb, and have openings to accommodate tree pits. Lay-bys designed to T&ES standards shall be considered.

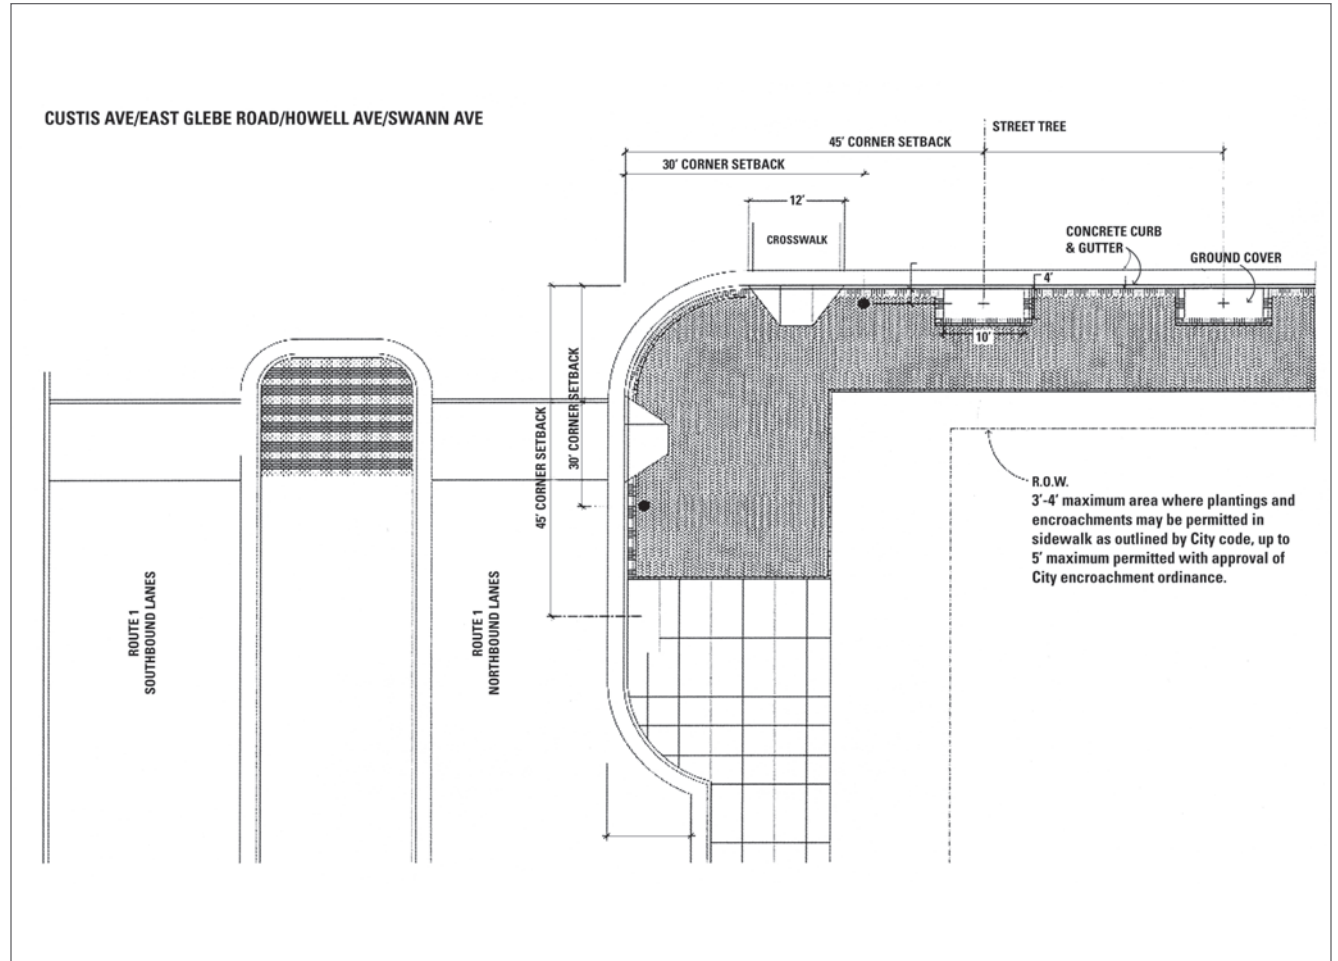

Potomac Avenue


Potomac Avenue shall have a continuous sidewalk along the west edge only. Sidewalks shall be 14' wide, located immediately adjacent to the curb, and have openings to accommodate tree pits. Sidewalks shall be concrete or brick.

Street tree spacing must be an average of 35' o.c., 25' min.

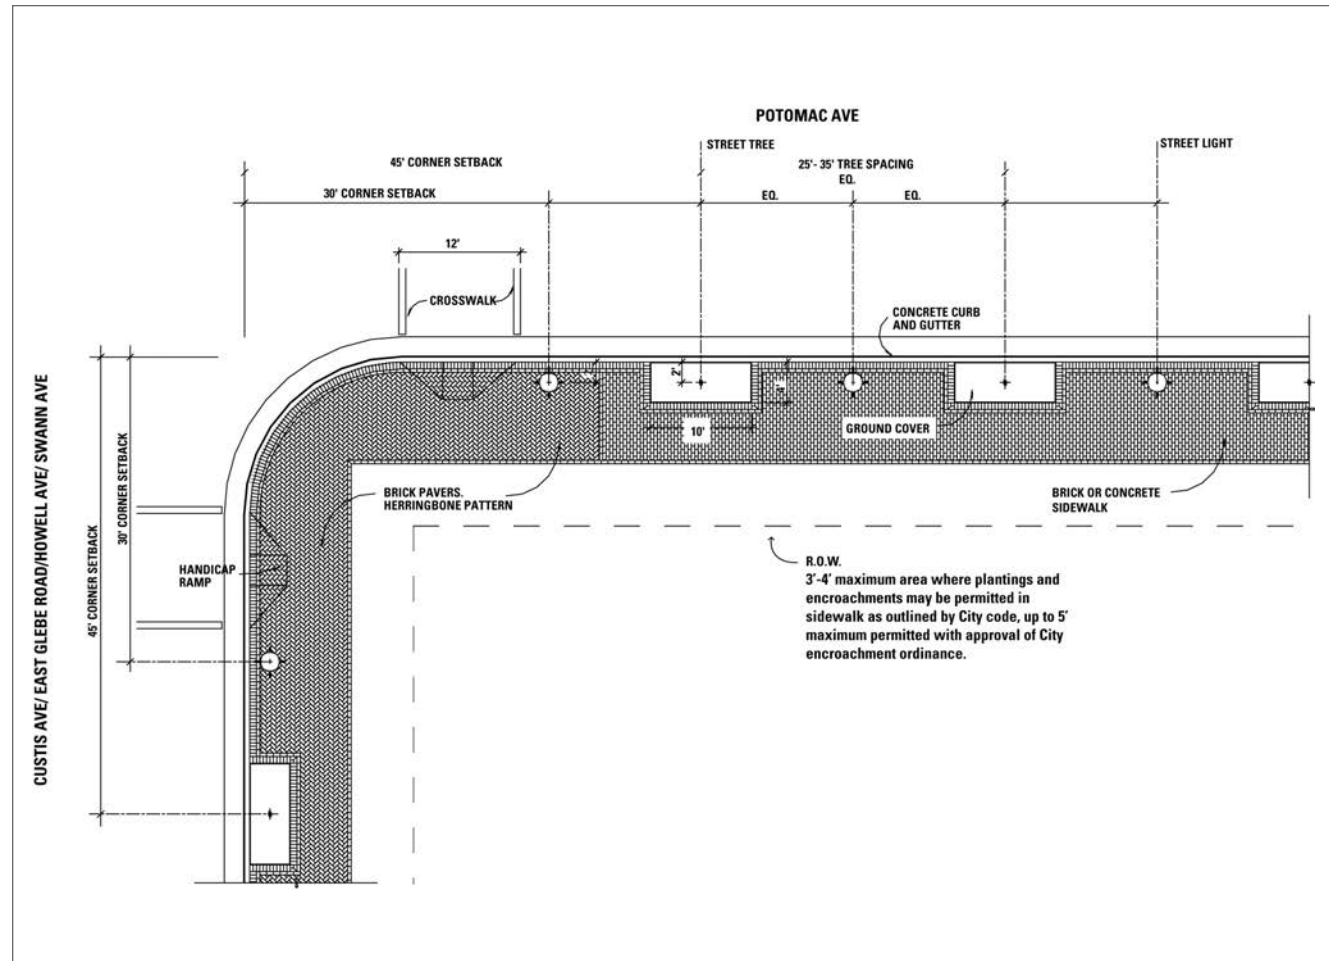


Core Streets

Core Streets are Main Street, E. Glebe Road, Swann Avenue, Custis Avenue, Howell Avenue: All Core Street sidewalks shall be minimum 14', 19' at Town Green, and constructed of brick. Paving systems for these streets shall always turn the corner at intersections with Typical Residential Streets, Potomac Avenue and Route 1.

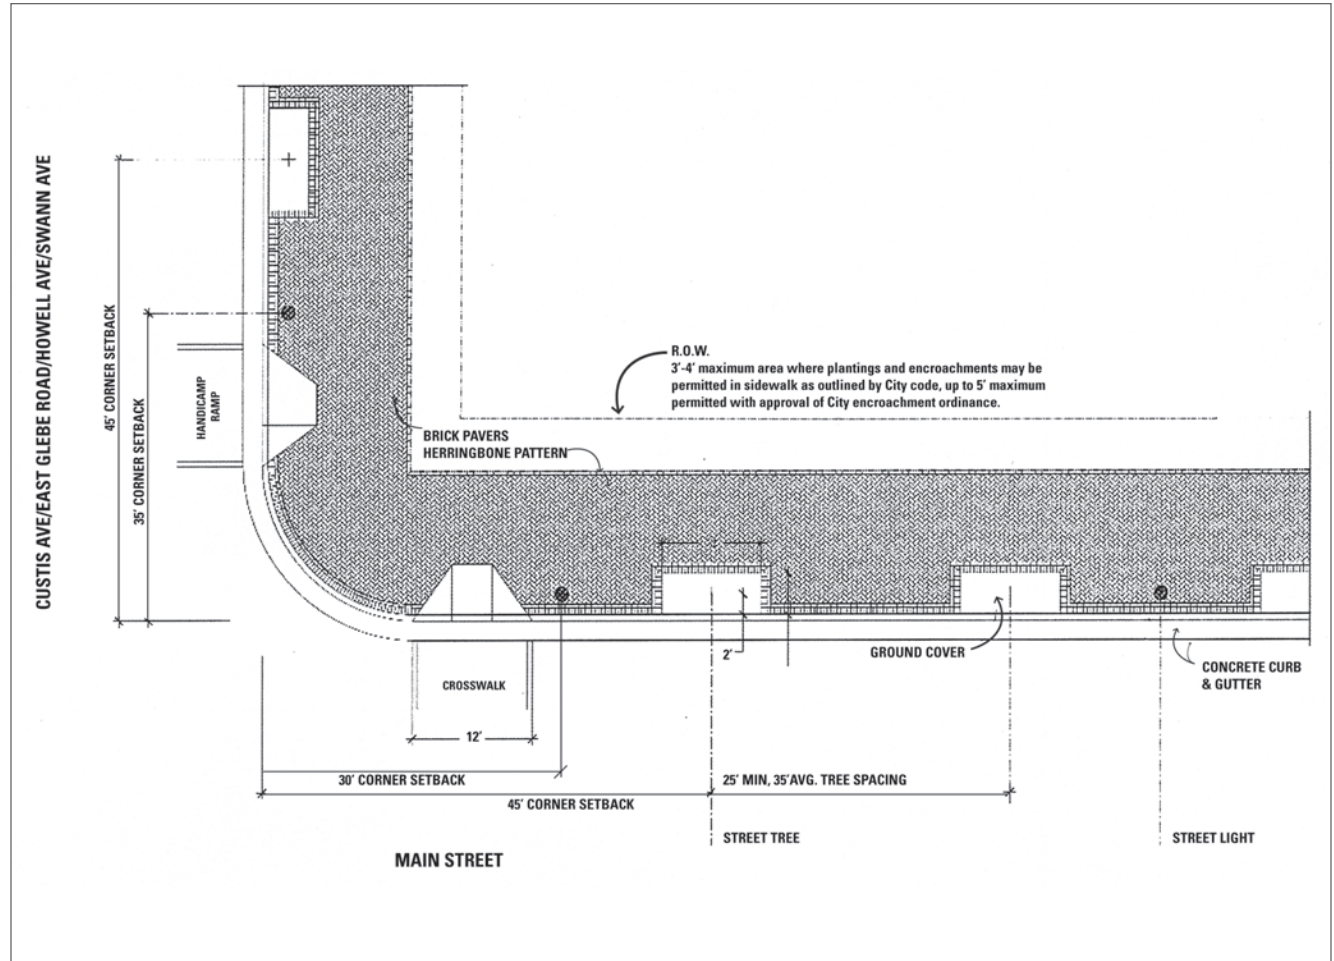

Typical Residential Streets

Typical Residential Street sidewalks shall be 14' wide and paved with concrete or brick.

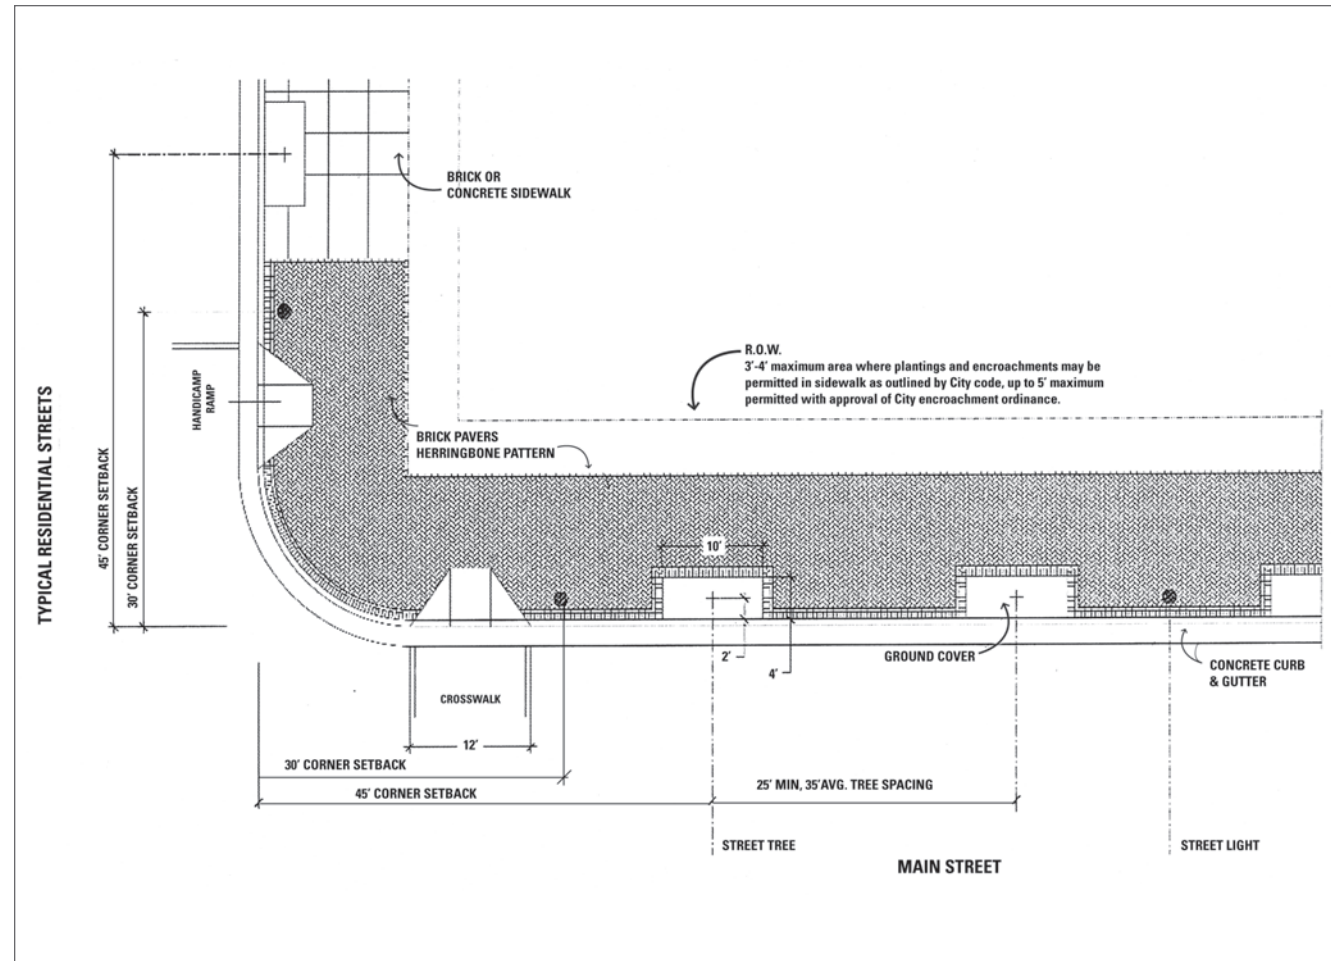




Street Lighting

Street lighting at Potomac Yard will be consistent in style, quality, and character and compliment, in fixture selection and scale, the pedestrian emphasis of the plan. Street lighting including fixtures, power supply, and light levels shall comply with all the local, state, and federal regulations applicable for public space. Street lights shall be consistent on all streets except Route 1. Street lights along Route 1 may be consistent with the existing street lights along the corridor. Street lights shall be similar to models shown above. All street lights and lighting levels shall meet T&ES standards. Color shall be consistent throughout and shall be in the black or gray range. Street light locations shall be consistent in spacing and distance set back from curb. Street light spacing shall be coordinated with the rhythm of street tree spacing. In addition, street lights shall be located no closer than ten feet from nearest street tree. Center of pole shall be set two feet from back of curb. Street light foundations shall be concealed from view.

Street Furniture

Site furniture at Potomac Yard shall be consistent in style, quality, and character. There will be two distinct types of bench styles at Potomac Yard: one Street Bench standard and one Park Bench standard. Although both styles shall be of the same family and constructed of the same materials, the Street Bench shall be slightly heavier in appearance. Specialty furniture for select civic spaces is permitted if the design is more fitting for those spaces.

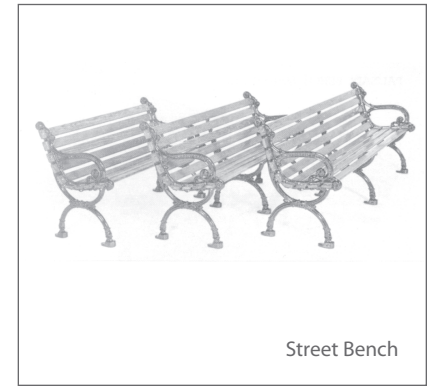

Street Bench

Benches

Street Benches shall have hardwood slats and cast iron stanchions, resembling those in images shown. Benches shall vary from 4' to 6' in length. Bench locations shall be limited to areas in front of commercial buildings and public transportation stops. Grouping of at least two benches per location is encouraged.



Park Bench

Trash Receptacles

Trash Receptacles shall be of the same family as the bench style selected, or as required by T&ES. Models shall include an attached lid or cover for weather protection. Receptacles shall be placed at every intersection along Main Street (minimum one per intersection) and at Town Center.

Bike Racks

The design of bike racks shall complement the style of other street furnishings.



Walls and Fences


Within residential neighborhoods, Town Center, Howell Park, and Neighborhood Parks, walls located within public view shall be brick, stone, stucco or precast concrete. Garden walls shall be provided at the ends of row units, facing the street. These garden walls shall be six feet in height. Walls shall extend from building to garage or alley property line (see Building Guidelines).

Fences

Within residential neighborhoods, Town Center, Howell Park, and Neighborhood Parks, fences located in areas visible to the public shall be painted wrought iron. Wood fences, if used in other locations, shall be painted and shall not exceed six feet in height. Wood fences should not be visible from the street. Fencing required for playgrounds and recreation areas shall be architectural metal fencing similar to Legi fencing, manufactured by Outer-Space Landscape Furnishings. With the exception of active recreation court enclosures, chain link fencing shall be prohibited from public view.

At Grade Parking Enclosures

Parking lots located behind buildings, when visible from the street, shall be enclosed by garden walls or by a combination of walls and wrought iron fencing, accented with garden plantings. Walls and fences shall not be less than 3.5 feet in height, and shall not exceed six feet in height. Safety should be considered when determining height and material.

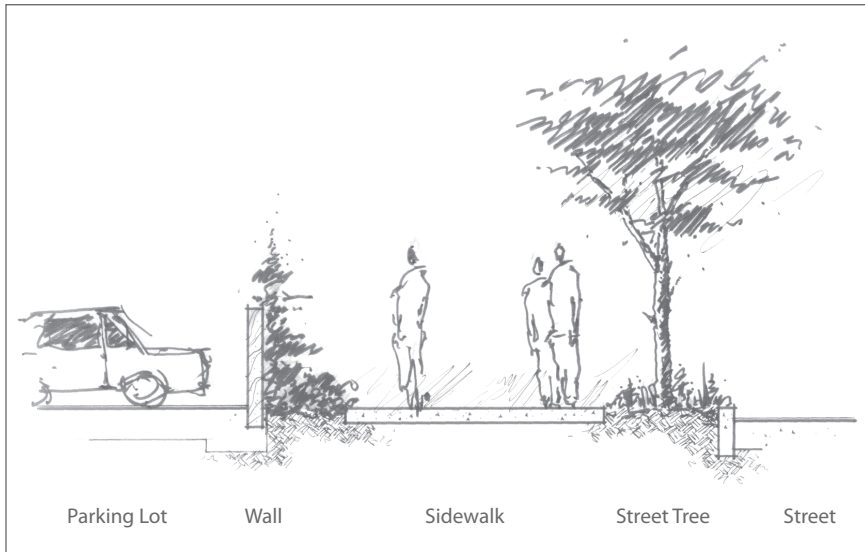

Parking Lot

Wall

Sidewalk

Street Tree

Street



Parkscape Standards

Plant Material Quality and Size

All plantings and installation methodologies shall conform to the City of Alexandria standards and as defined by this guideline. Plants shall be nursery-grown in accordance with the latest edition of USA standards for Nursery Stock. Ground covers shall be established, well-rooted, in containers with not less than the minimum number and length of runners required by ANSI 260-1 for pot size used. Ground cover plants shall be sized and spaced such that ground plane coverage is 90% complete within two years of installation.

Potomac Yard Park

Potomac Yard Park is envisioned as an informal park with naturalized plantings. Plant material species shall be predominantly native and suitable to environmental conditions of the site. There will be upland areas with dry soils and there will be wet soils in areas affected by bioretention and BMP pond edges. The park shall include a variety of spaces, some of which are tree-covered, shady areas and some that are open, sunny spaces. Tree canopy coverage of the site shall be 40% at 10 years from time of installation. There shall be a mix of shade trees, understory trees, and evergreen trees. For safety and maintenance purposes, shrub planting is discouraged. The mix of tree types by canopy coverage shall be as follows: Large Deciduous Parkland Trees (50 to 75%), Medium Deciduous Parkland Trees (5 to 10%), Understory Parkland Trees (5 to 10%), Large Evergreen Parkland Trees (0 to 15%), and Small Evergreen Parkland Trees (0 to 5%).

Howell Park

Howell Park is envisioned to be a large neighborhood park of either an informal or formal design. There shall be a mix of tree species with 70% tree canopy coverage of the site at ten years from time of installation. The mix of tree types shall be as follows: Large Deciduous Parkland Trees (75 to 100%), Medium Deciduous Parkland Trees (0 to 15%), Understory Parkland Trees (0 to 5%), Large Evergreen Parkland Trees (0 to 5%), and Small Evergreen Parkland Trees (0%).

Potomac Plaza

The neighborhood park is intended to be used by the residents of Northeast and Slaters Village, planned as a passive use park. Tree canopy coverage of the site shall be 50% at 10 years from time of installation. The mix of tree types shall be as follows: Large Deciduous Parkland Trees (75 to 100%), Medium Deciduous Parkland Trees (0 to 15%), Understory Parkland Trees (0 to 5%), Large Evergreen Parkland Trees (0 to 5%), and Small Evergreen Parkland Trees (0%).

Potomac Greens Park

Situated adjacent to an existing natural and wetlands area, this park is envisioned as passive recreation. Natural areas will be developed as passive parkland with boardwalks and trails that bring visitors in close contact with this sensitive environment. Sitting and picnic areas serving the passive space will be provided. Not including the multiuse field and existing protected woodland, tree canopy coverage of the site shall be 30% at ten years from time of installation. The mix of tree types shall be as follows: Large Deciduous Parkland Trees (75 to 100%), Medium Deciduous Parkland Trees (0 to 15%), Understory Parkland Trees (0 to 5%), Large Evergreen Parkland Trees (0 to 5%), and Small Evergreen Parkland Trees (0%).



Four Mile Run Park

Located at the juncture of regional trail systems, this park is envisioned as a significant open space intended for use by both local and regional visitors. Trails connecting the Potomac Yard Park trail to the Four Mile Run trail system shall be provided. Use of a variety of plantings is encouraged. The south bank and bank top shall be heavily planted with both evergreen and deciduous materials to screen the parking areas of the Potomac Yard Retail Center. Bridge decks shall be paved with a combination of both paving and soil sufficient to sustain plant life. Since this park is envisioned as both a rest stop for bikers/hikers and a destination park, an abundance of benches, trash receptacles, and bike racks shall be used. Tree canopy coverage of the site including bridge decks but not including water surface areas shall be 20% to 40% at 10 years from time of installation. There shall be a mix of shade trees, understory trees, and evergreen trees. The mix of tree types by canopy coverage shall be as follows: Large Deciduous Parkland Trees (50 to 70%), Medium Deciduous Parkland Trees (10 to 20%), Understory Parkland Trees (10 to 20%), Large Evergreen Parkland Trees (10 to 20%), and Small Evergreen Parkland Trees (0 to 10%).

Neighborhood Parks

Neighborhood parks should contribute a variety of open space uses to the site, including, where space is adequate, playgrounds or tot lots. Park designs should vary throughout the site, so that each park lends character and identity unique to each neighborhood. Benches, trash receptacles, and bike racks shall be located in each neighborhood park. For safety and maintenance purposes, shrub planting is discouraged.

Finger Parks

These parks are envisioned as green pedestrian pass-through spaces linking the neighborhood of Del Ray to Potomac Yard. A double row of street trees shall be planted on each side of the park.

Rail Park

Rail Park is intended to be an unstructured open park with naturalized plantings. A portion of the park shall be for a public dog-run area, with gravel surface, fencing, water, benches and a dog waste receptacle. The remainder of the space shall be used as desired by the City; at a minimum the area shall be planted lawn.

Recommended Park Planting List

Trees for Urban Plazas and Terraces

Cercidiphyllum japonicum Katsura Tree
Cladrastis lutea American Yellowwood
Crataegus phaenopyrum Washington Hawthorn
Ginkgo Biloba Maidenhair Tree (male only)
Gleditsia triacanthos var. *inermis* Thornless Honey Locust
Magnolia grandiflora Southern Magnolia

Large Deciduous Parkland Trees

Acer rubrum Red Maple
Fagus grandifolia American Beech
Fagus sylvatica European Beech
Fraxinus pennsylvanica Green Ash
Gymnocladus dioica Kentucky Coffeetree
Plantanus x acerifolia London Plantree
Quercus alba White Oak
Quercus coccinea Scarlet Oak
Quercus phellos Willow Oak
Quercus rubra Northern Red Oak
Ulmus americana 'Princeton' Princeton American Elm
Ulmus parviflora Lacey Elm

Medium Deciduous Parkland Trees

Cercidiphyllum japonicum Katsura Tree
Koelreuteria paniculata Golden Rain Tree
Oxydendron arboretum Sourwood
Phellodendron amurense 'Shademaster' Shademaster Amur Corktree
Sophora japonica 'Regent' Japanese Scholartree

Understory Parkland Trees

Amelanchier canadensis Serviceberry
Cercis canadensis Eastern Redbud
Cornus kousa Kousa Dogwood
Carpinus caroliniana American Hornbeam

Large Evergreen Parkland Trees

Cedrus atlantica 'Glauc' Blue Atlas Cedar
Magnolia grandiflora Southern Magnolia
Picea abies Norway Spruce
Picea glauca White Spruce
Pinus nigra Austrian Pine

Small Evergreen Parkland Trees

Cryptomeria japonica Japanese Cryptomeria
x Cupressocyparis leylandii Leyland Cypress
Ilex opaca American Holly
Tsuga canadensis Canadian Hemlock

Wet Soil Tolerant Trees

Amelanchier canadensis Serviceberry
Betula nigra River Birch
Carpinus caroliniana American Hornbeam
Fraxinus pennsylvanica Green Ash
Liquidambar styraciflua Sweet Gum
Magnolia virginiana Sweet Bay Magnolia
Metasequoia glyptostroboides Dawn Redwood
Nyssa sylvatica Black Gum
Pinus nigra Austrian Pine
Salix matsudana 'Tortuosa' Corkscrew Willow

Tree Pit Ground Covers

Liriope muscari Lilyturf
Liriope spicata Creeping Lilyturf
Ophiopogon japonicus Mondo Grass
Pachysandra terminalis Japanese Spurge
Vinca minor Periwinkle

Lawns

Seed: Shall be state certified, VA/MD Approved Turf Type, and shall comply with Federal Seed Act.

Sod: Shall be American Sod Producers Association (ASPA) Grade: Nursery Grown or Approved, and shall comply with ASPA classes of sod materials.

Path and Trail Paving

Paths

Park paths shall be designed to accommodate light vehicular traffic. Pavement of paths located adjacent to streets shall match sidewalk paving within the corridor. Internal paths shall be brick, concrete, asphalt, stone, or stone dust, as appropriate for the park design. Path pavements shall meet all local, state, and federal regulations for safety and accessibility.

Trails


Trail pavements shall be asphalt, designed to accommodate light vehicular traffic. Trails shall be 10 to 12 feet in width to accommodate two-way bike traffic and city maintenance and emergency vehicles. Trails shall be designed in accordance with American State Highway Transportation (ASHTO), Uniform Federal Accessibility Standards (UFAS), and VDOT standards. Bike trail grades, design speeds, radii and recovery zones shall comply with ASHTO's Guide for the Development of Bicycle Facilities. Trails shall meet all local, state, and federal regulations governing safety and accessibility. The trail from Four Mile Run to the Braddock Road trail system shall be continuous. Connections from adjacent neighborhoods to the trail

must be provided at each signalized crosswalk along Potomac Avenue. Trail design shall include rest nodes along the length of the trail, furnished with benches and trash receptacles. Secondary pedestrian-only trails shall be paved with concrete, asphalt, stone, or stone dust.

Boardwalks

Boardwalks with railings shall be provided within the designated protected environmental areas in Potomac Greens Park. Boardwalks are intended to allow pedestrian access to nature areas located within sensitive ecosystems. All design materials and construction operations for boardwalks shall be in accordance with regulations regarding environmentally protected areas.



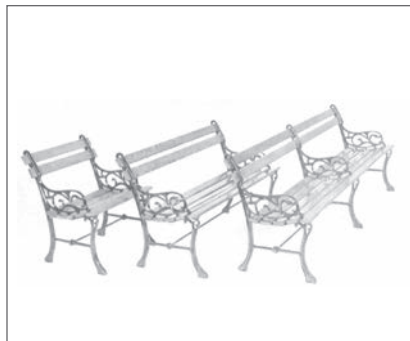

Park Lighting

Park lights shall have the same fixture as that selected for street lights. Alternate site lights may be selected for public parks, if desired by the City. These lights should be compatible with the street light style. Park lighting shall only be required to light trails and pathways, not entire area of park. Pathways and sidewalks lit by street lights are not required to have additional park lighting. Park light foundations shall be concealed from view. Site light including fixtures, power supply and light levels shall comply with all local, state, and federal regulations applicable for public space.

Park Furniture

Benches

Park Benches shall have hardwood slats and cast iron stanchions, or shall be teak, resembling those in images shown. The overall appearance of the Park Bench shall be slightly lighter in style than the Street Bench. Another acceptable style for the Park Bench is the DC Standard Bench for City Parks. Park Benches shall be located along bicycle/pedestrian trails, along pathways and central paved areas within parks, and at major pedestrian crossings into Potomac Park. Grouping of at least two benches per location is encouraged.

Trash Receptacles

Trash receptacles shall be of the same family as the bench style selected. Receptacles shall be placed in each park, and along bicycle/pedestrian trails in Potomac Park. Locations shall be coordinated with the City of Alexandria.

Bike Racks

The design of bike racks shall complement the style of other park furnishings. Bike racks shall be located at major pedestrian crossing points into Potomac Park, at the southernmost end of Potomac Park near Braddock Metro Station, and at park athletic fields. All Neighborhood parks shall have bike racks.

Drinking Fountains

Drinking fountains shall be provided in parks near centers of active recreation, public civic spaces, and trail rest nodes. Location of drinking fountains shall coincide with recreation facilities where appropriate.



Recreation Facilities

Recreation facilities shall be integrated as part of the proposed park designs. They shall be evenly distributed across the site, offering access to all neighborhoods. It is important that a variety of activities be included such as soccer fields, basketball courts, volleyball courts, tennis courts, playgrounds and tot lots, dog runs, fitness course, multi-purpose courts and open play areas, picnic areas, and rest nodes for hikers and bikers. Sports fields and courts shall be organized in an informal manner, allowing the pastoral design of the park to read through the sport's boundaries.

Three play fields shall be provided, two adjacent to Simpson Field and one near the George Washington School. All three shall be constructed complete with surface and subsurface grading, prescription soils, irrigation systems, prescription turf and lighting, if required by the City.

There shall be at least one playground or tot lot located within each of the neighborhoods as defined in the Parcel Plan. One regional playground shall be provided in Potomac Yard Park. Tot lots and playgrounds shall be designed and constructed in accordance with the latest federal, state, and local regulations and shall conform to the Consumer Product Safety Commission (CPSC) recommendations.

Tennis courts shall be 60' by 120' including clear zones, hard surface, drained from side to side, and long axis oriented north-south. Surround fencing shall be galvanized or vinyl coated chain link with mesh openings appropriate for tennis. Clustering two to four courts at one location is desirable. Minimum four tennis courts total.

Basketball courts shall be 94' by 60' including clear zones, hard surface, drained from side to side, and long axis oriented north-south. Minimum two basketball courts total.


Volleyball courts shall be 50' by 80' including clear zones, constructed of sand with permanent net system. Court design shall include subsurface drainage system. Minimum two volleyball courts total.

A fitness course shall be provided along the trail planned for Potomac Yard Park. Exercise stations shall be spaced approximately 150 to 200 yards apart.

Other recreation facilities are permitted as long as public safety, environmental protection, and visual quality is not compromised. Design and construction shall comply with all federal, state, and local regulations.

This page intentionally left blank.



Section 6: Illustrative Drawings

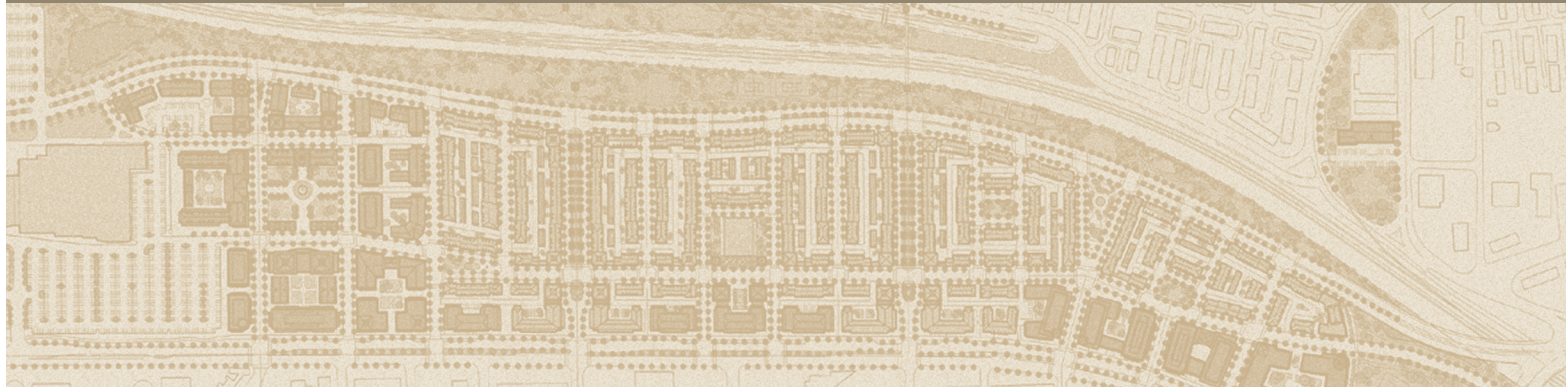


The illustrative material accompanying these guidelines show one possible build-out of the plan according to the guidelines. Recognizing that development of a large-scale project can take a decade or more, a certain flexibility is required and the final build-out may vary from the illustrative materials. The guidelines serve to preserve the design intent as approved by the public authorities and to ensure that Potomac Yard evolves as a harmonious family of buildings and open spaces, providing desirable living, working and recreational opportunities to the residents of the Yard and its surrounding neighborhoods.

This page intentionally left blank.



Town Center

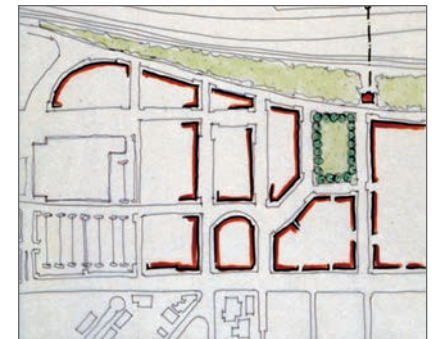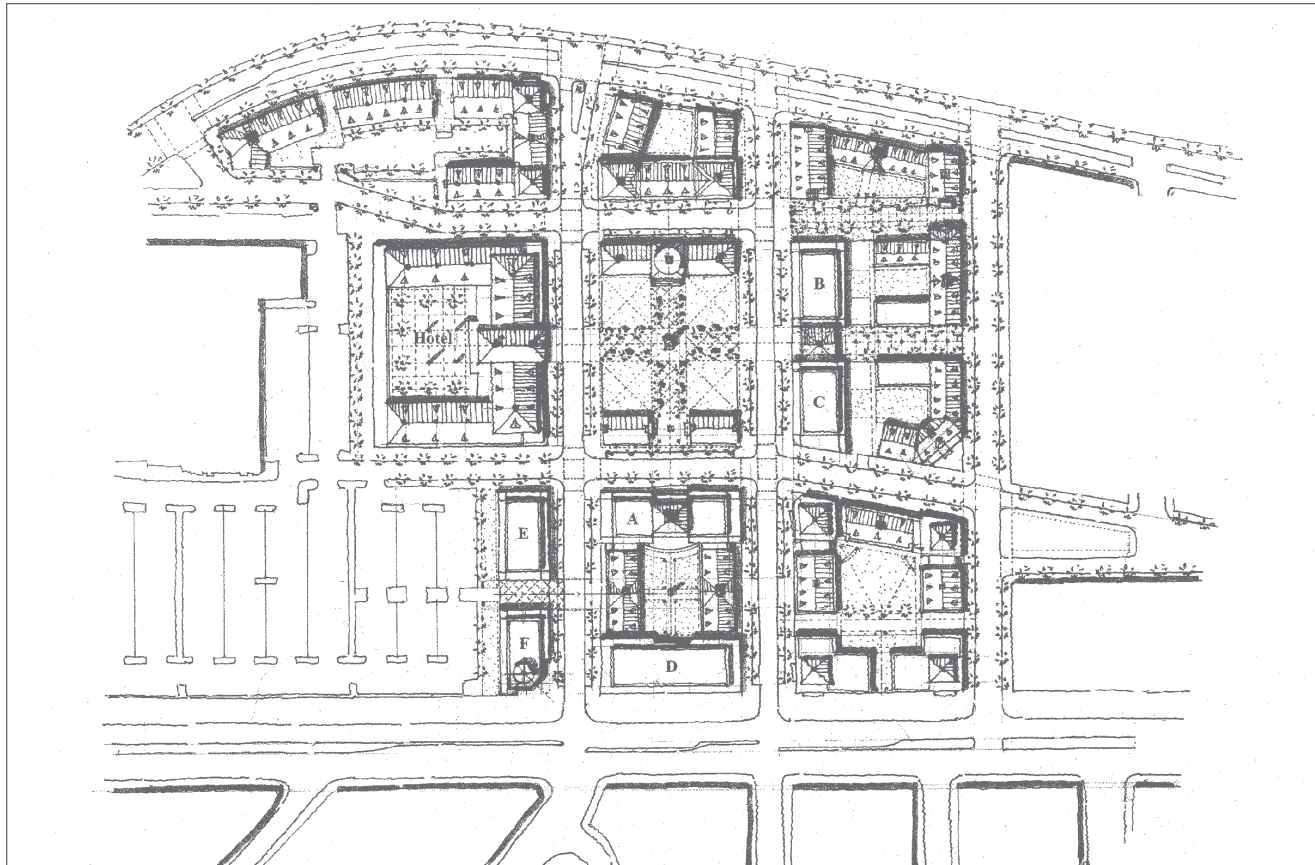


Residential Blocks

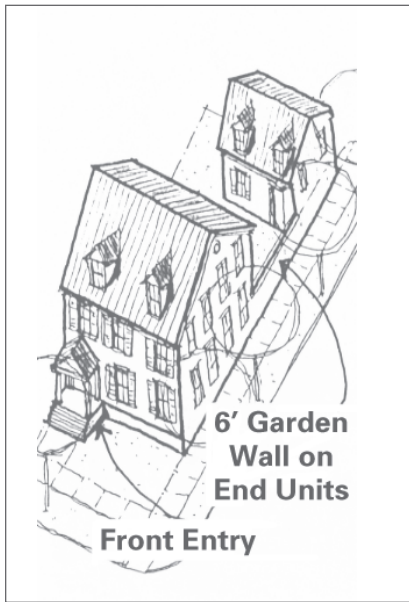



Prototypical Townhouse

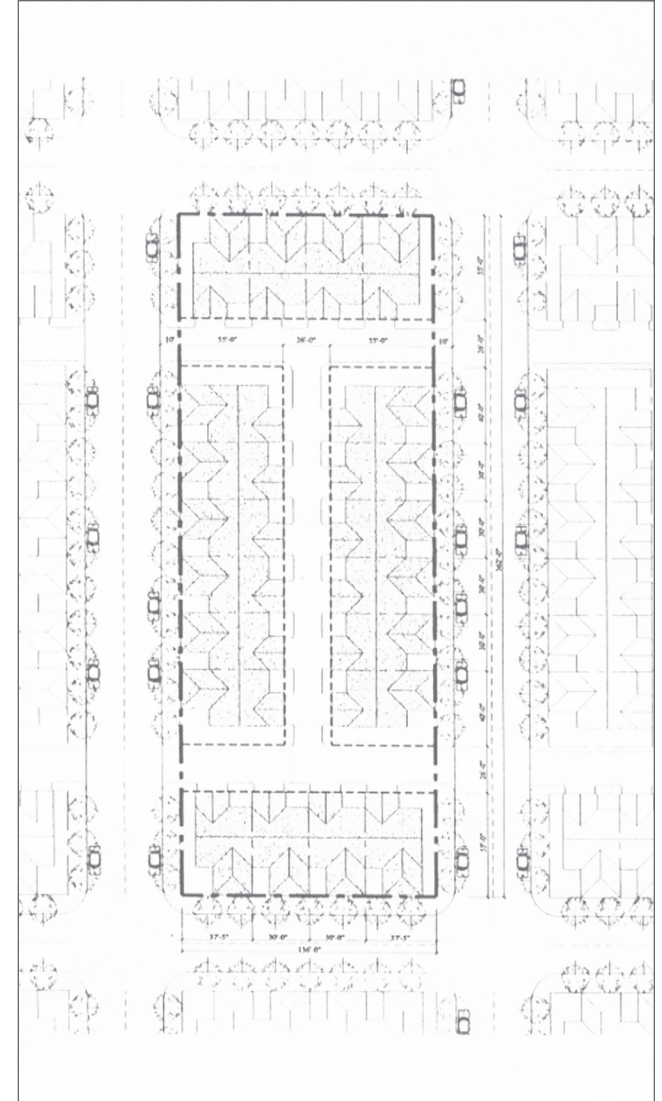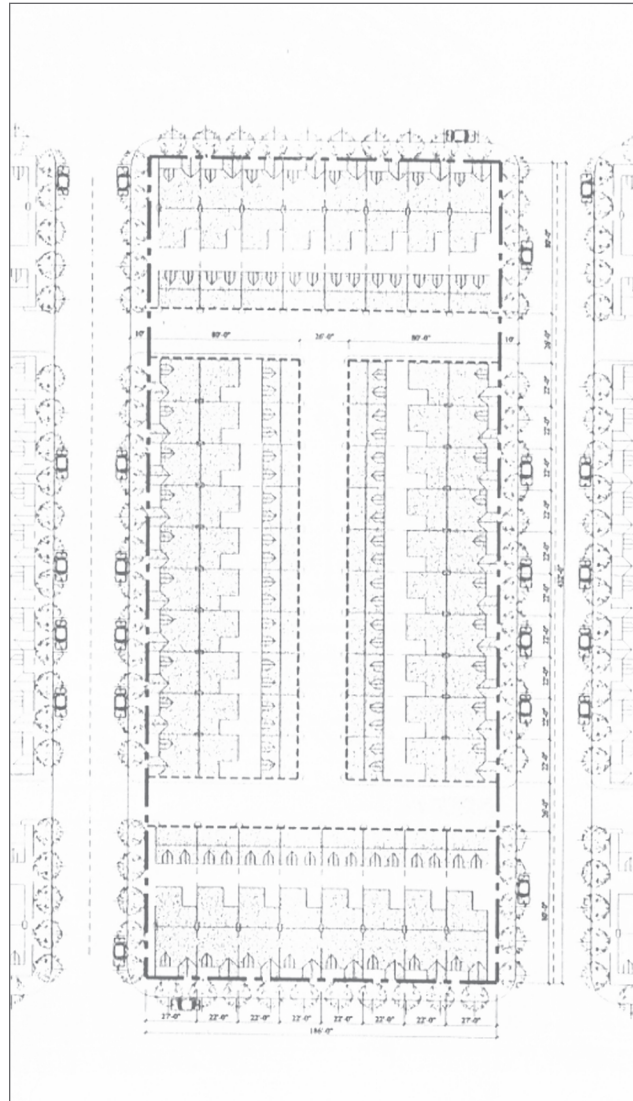


Illustrative Neighborhood Plan

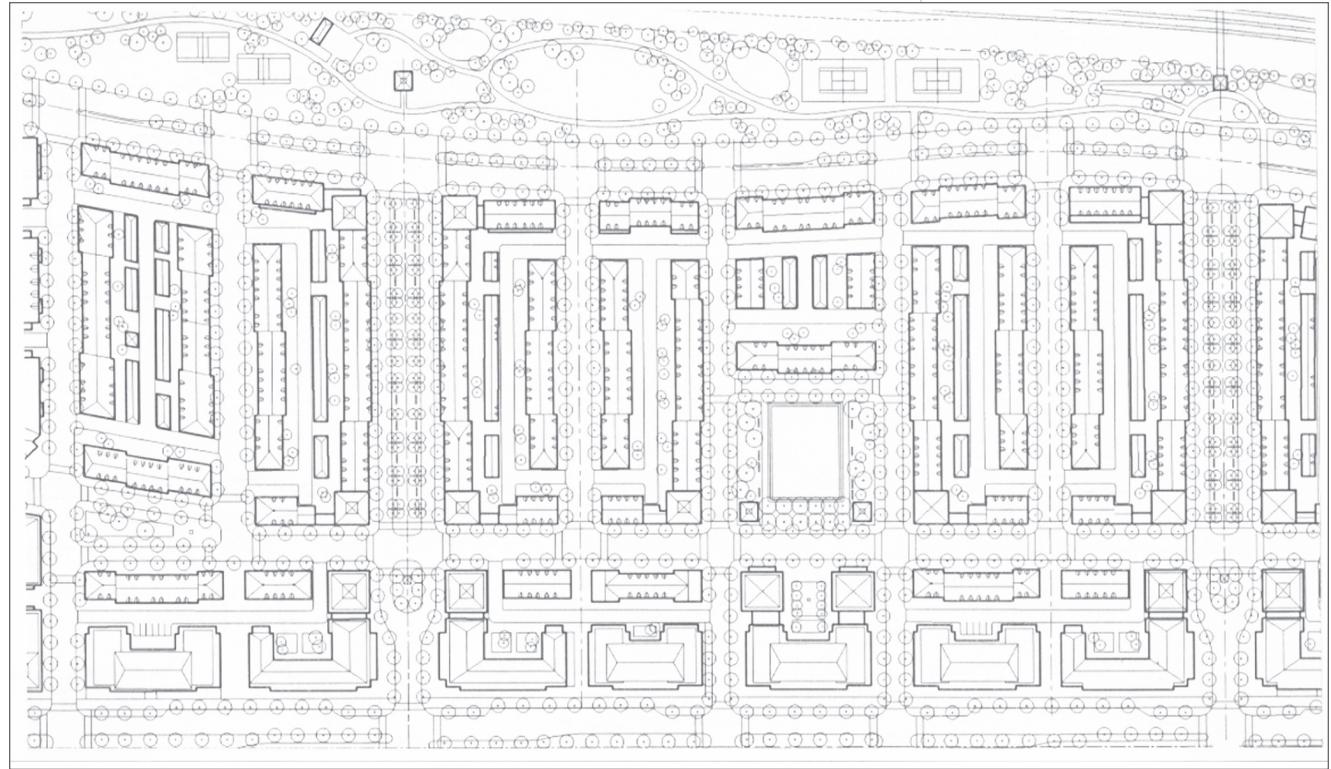



Mixed-use Blocks

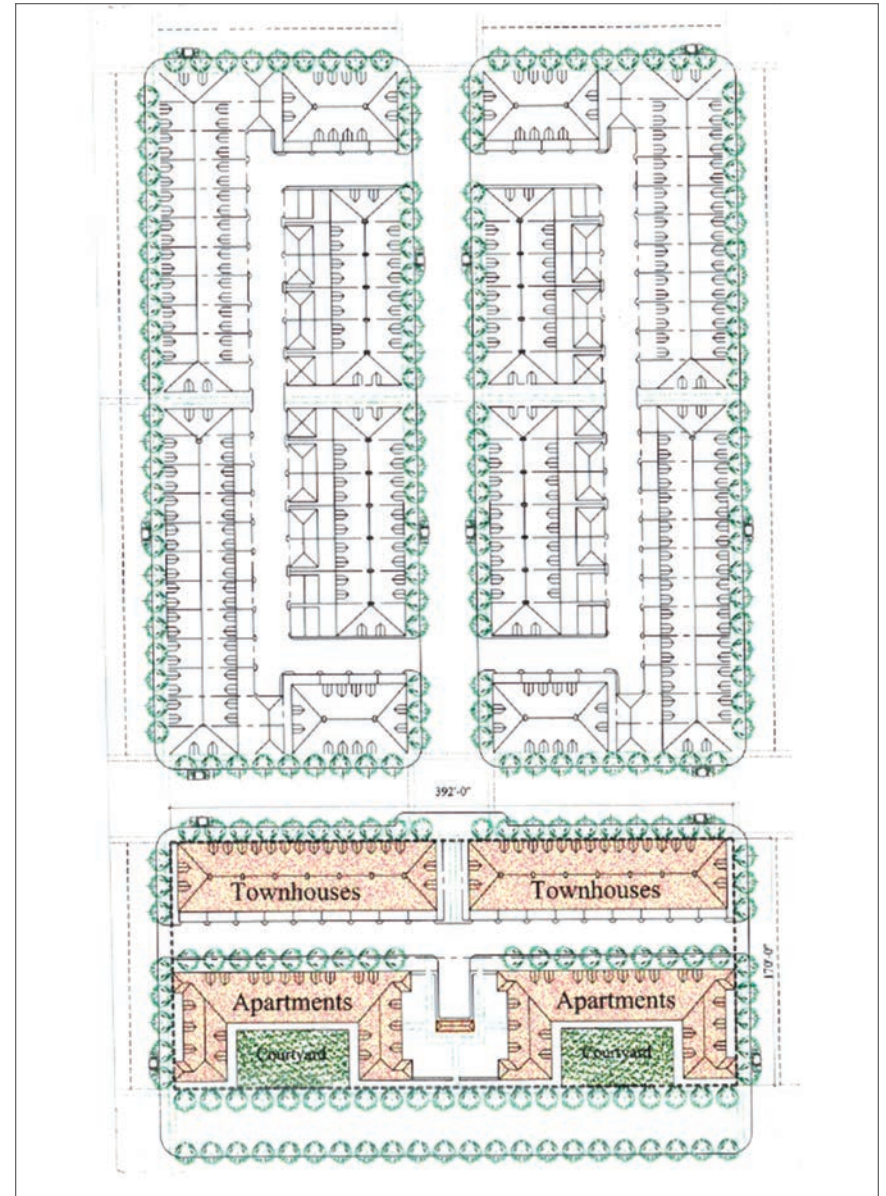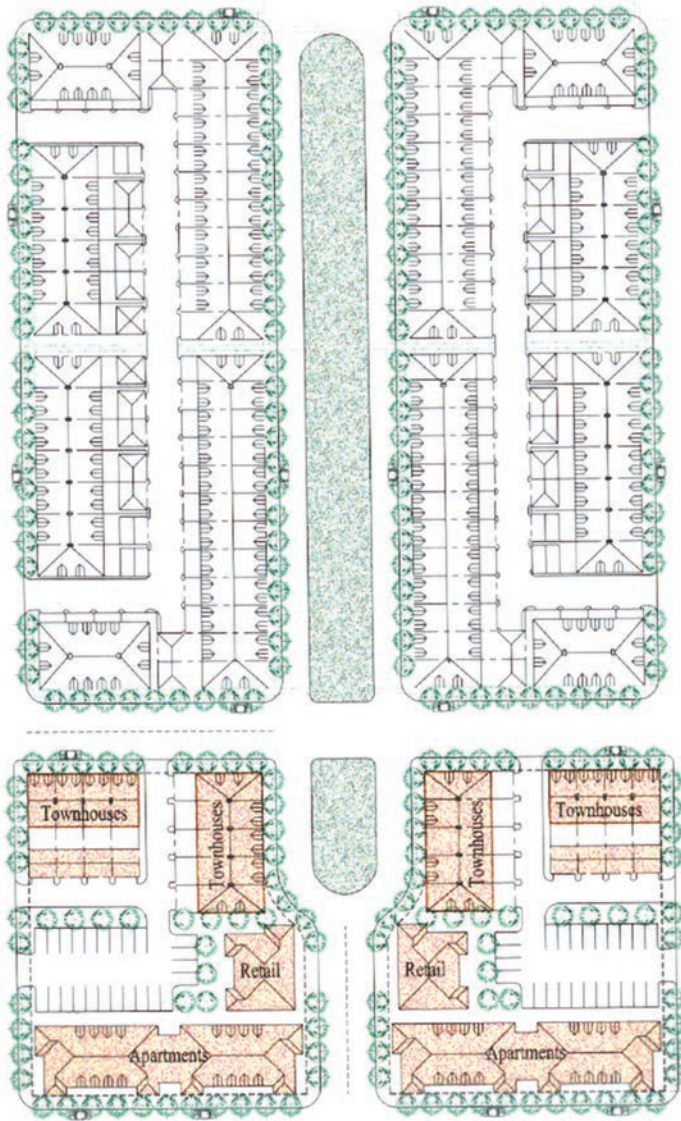

Illustrative Route 1 Frontage

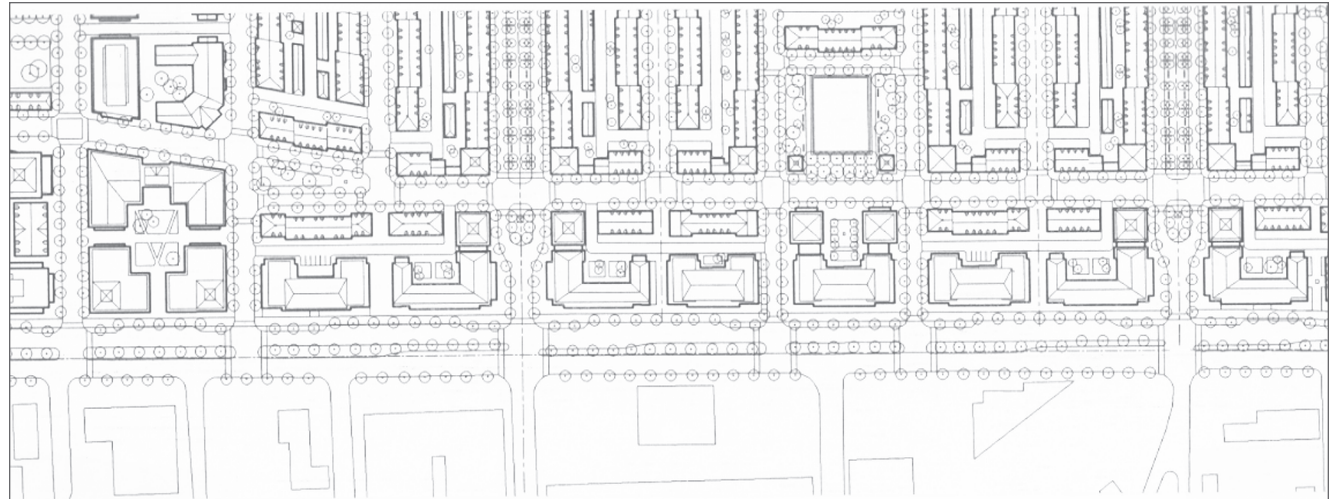

Neighborhood Parks

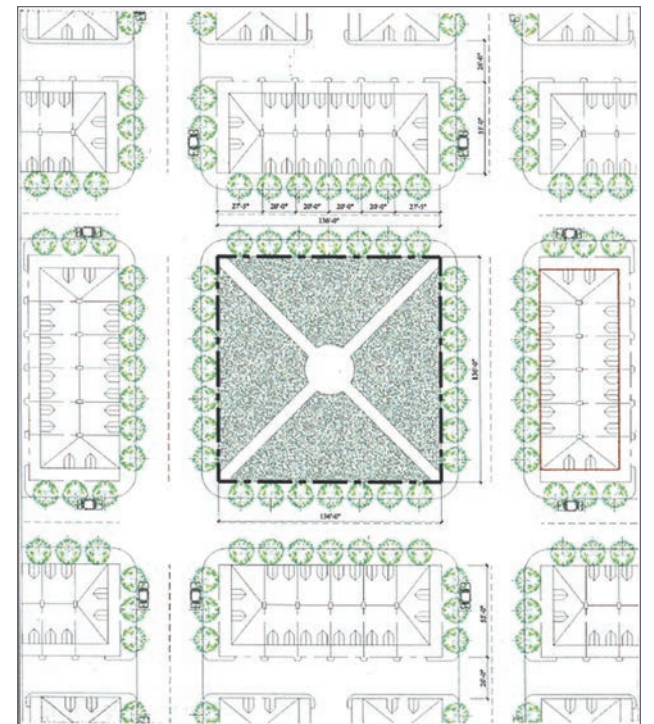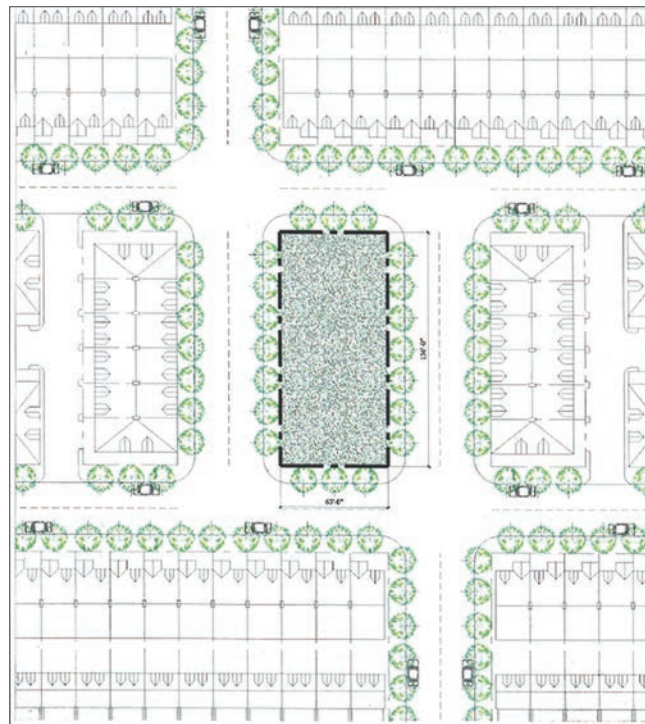



Potomac Greens




6

Overall Site Plan

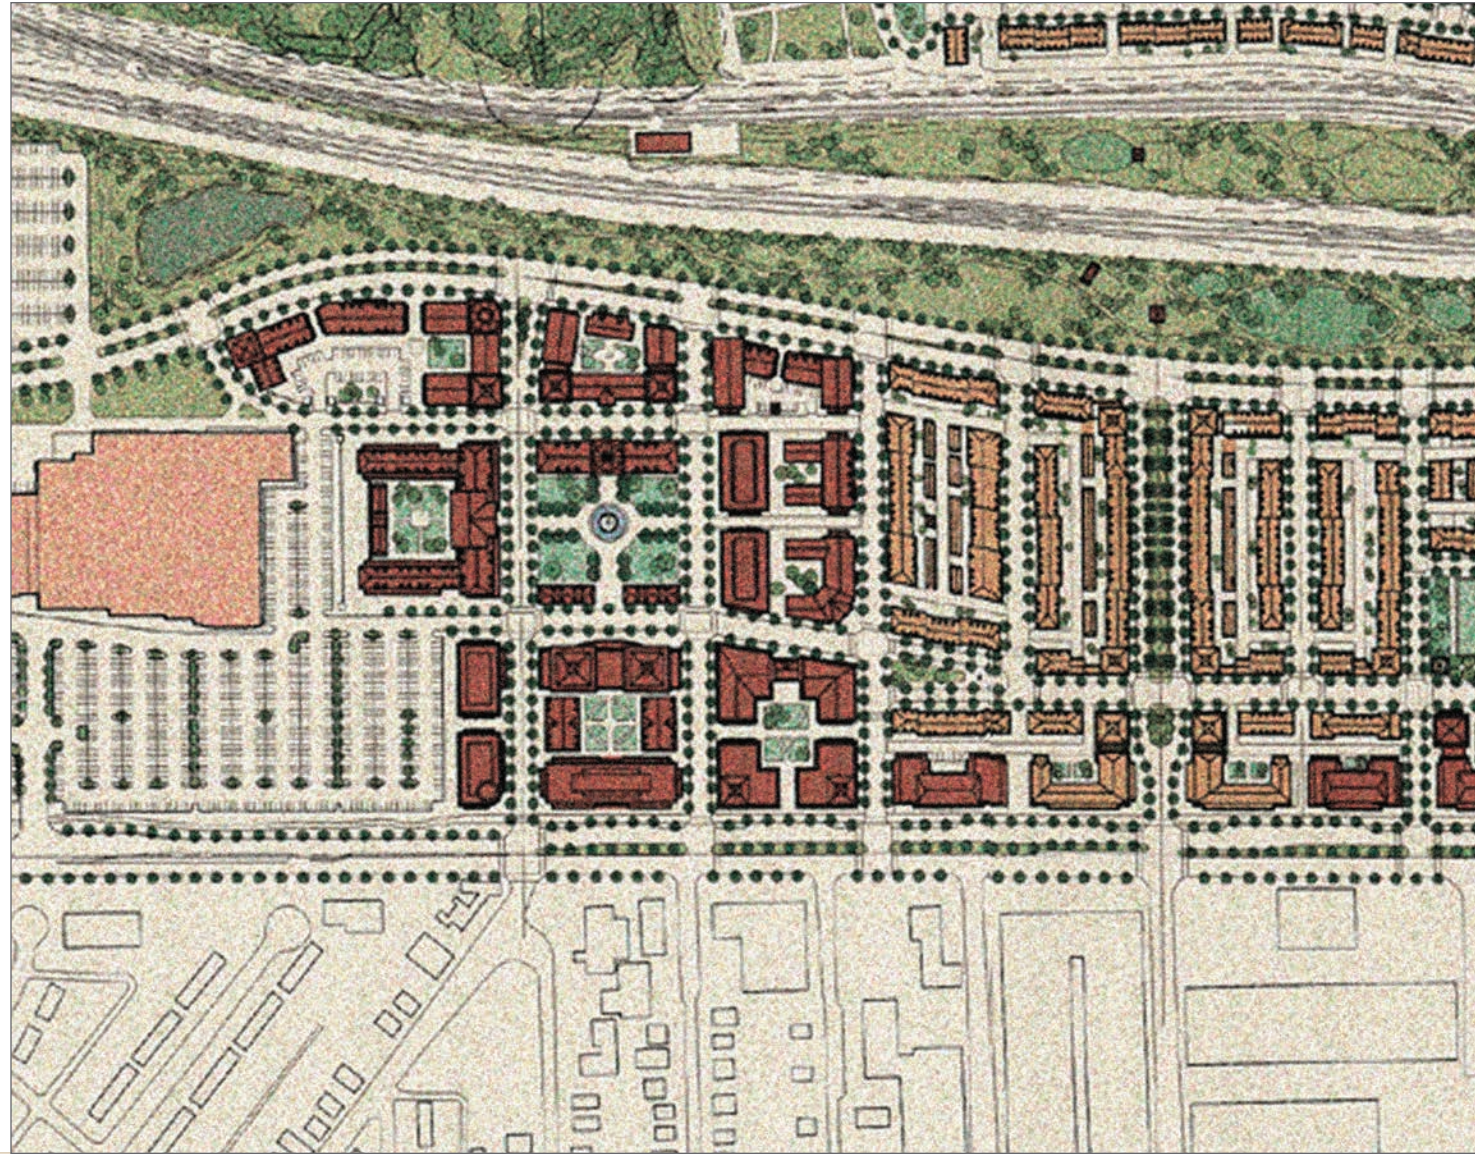

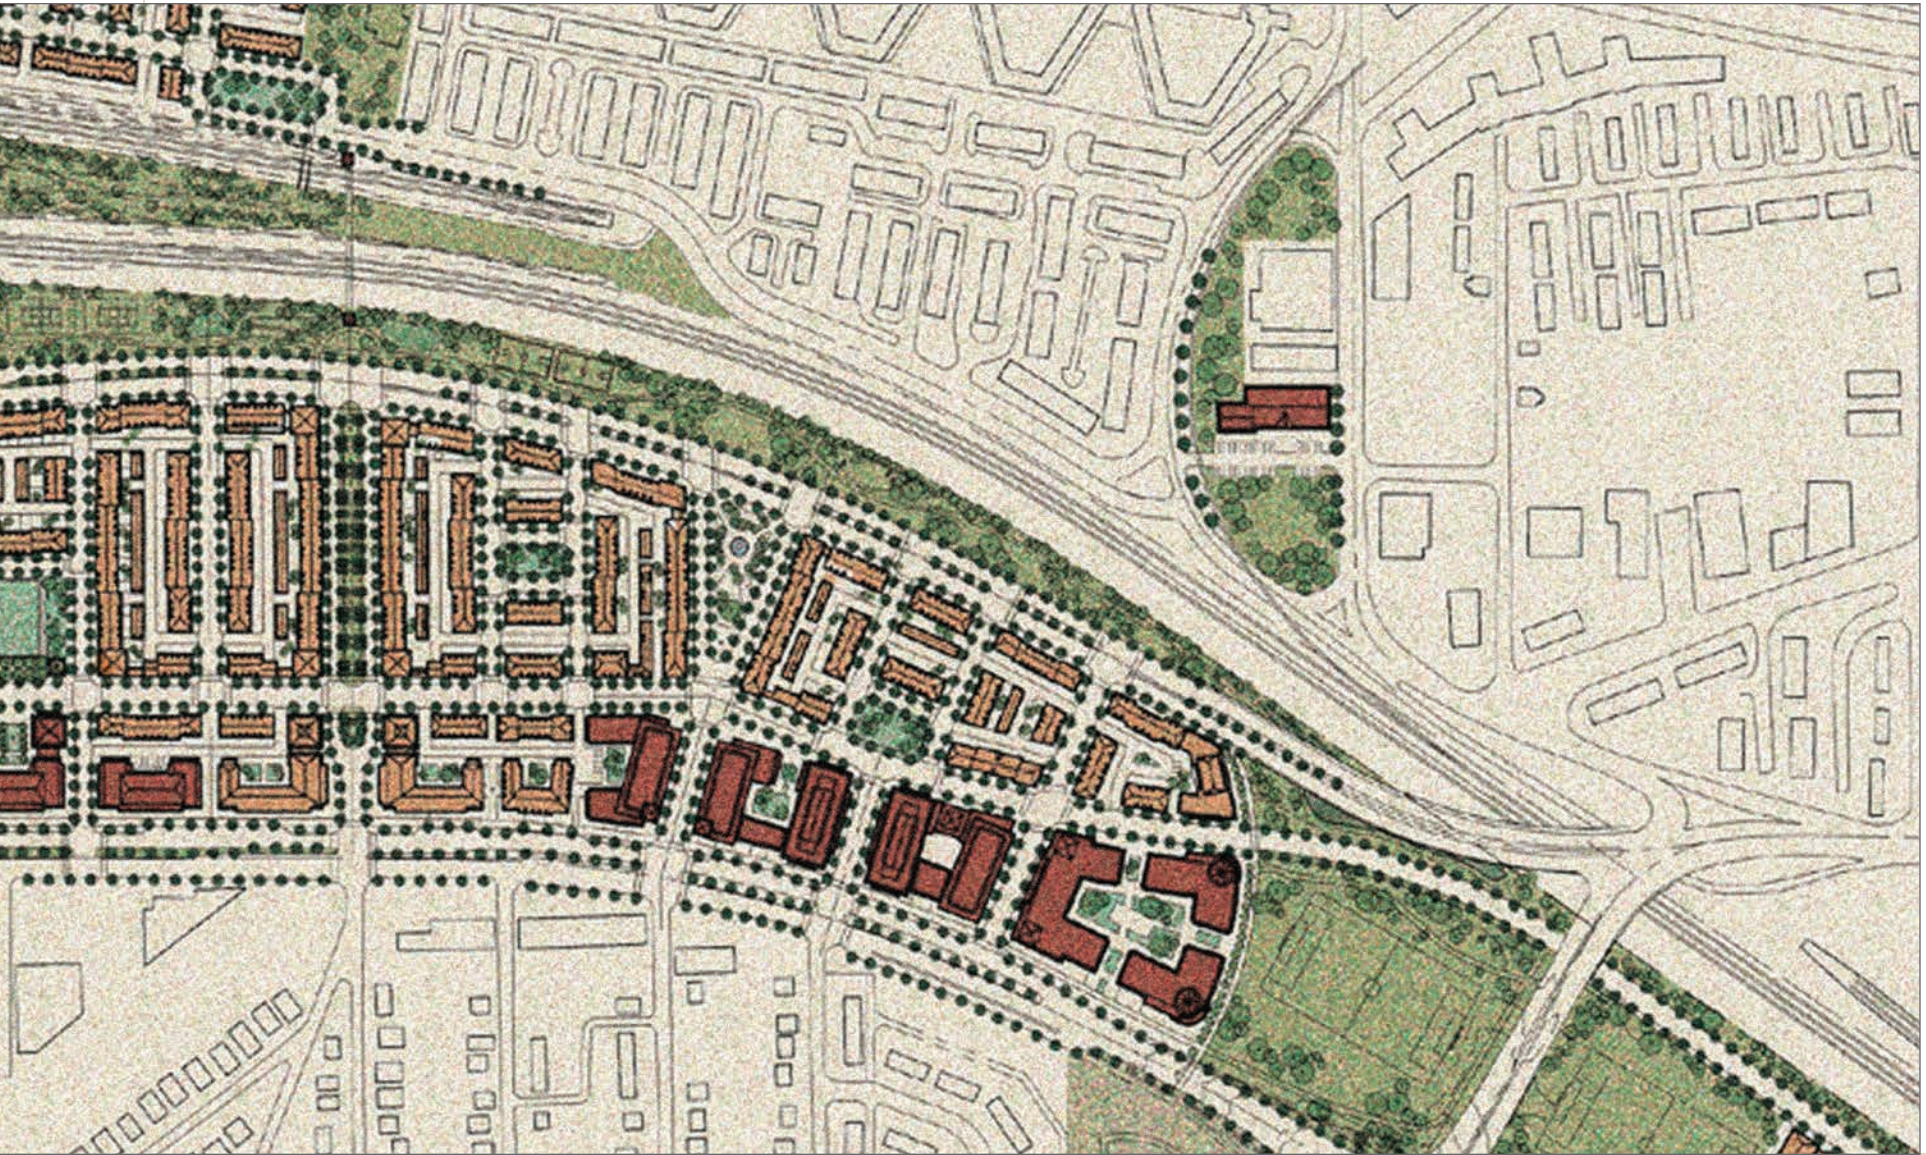

Overall Site Section

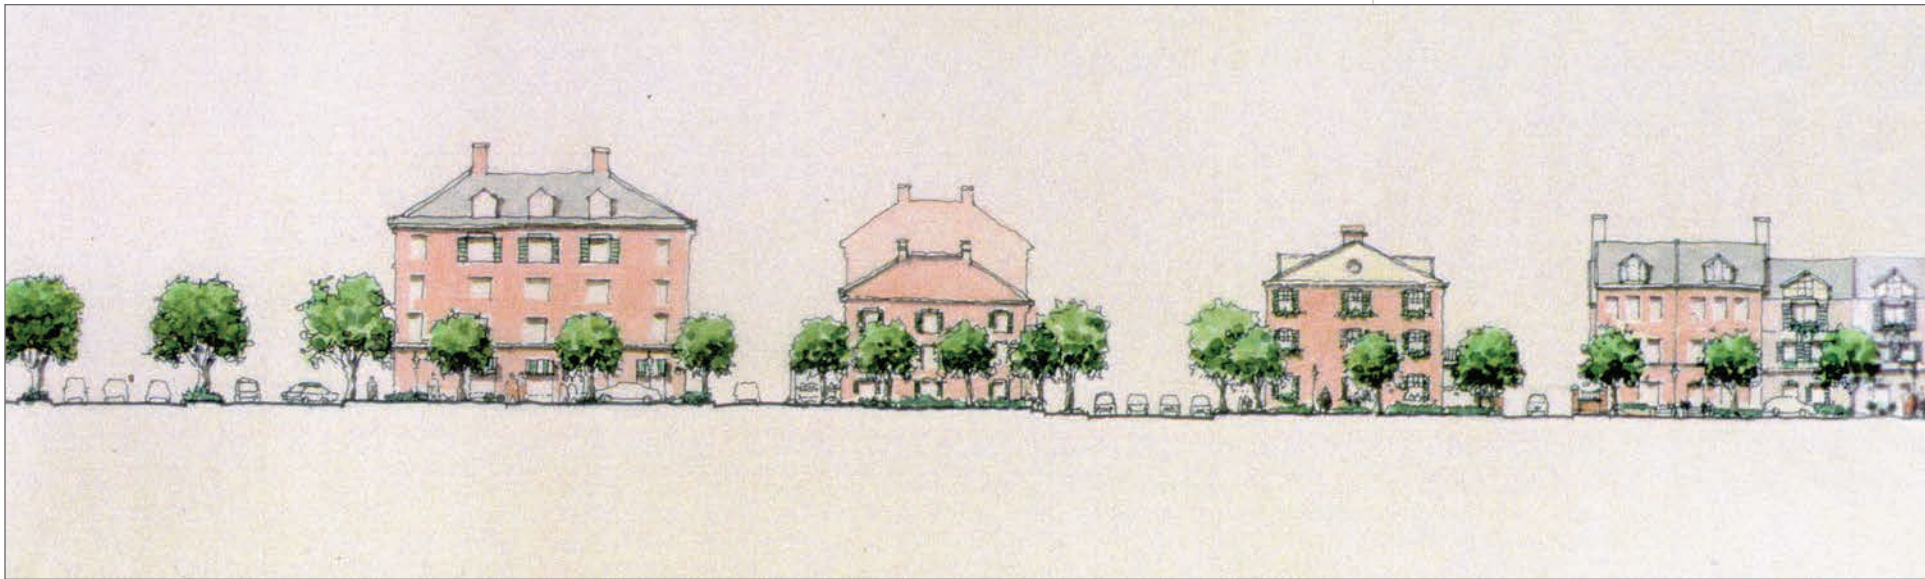



Prototypical Development Program

As in any large and complex development, the unpredictable real estate market over time necessitate flexibility in the development program. The table below illustrates one of many ways the maximum floor area and residential units for the overall site can be developed.

	Parcel A	Parcel C	Parcel F	Parcel G	Parcel H	Parcel I	Parcel J	Parcel L	Total
Office				800,000 sf	60,000 sf	104,000 sf	463,000 sf	473,000 sf	1,900,000 sf
Hotel				625 rooms					625 rooms
Multi-Family				374 units			110 units	310 units	794 units
Stacked Townhouse	70 units			40 units	150 units	225 units	120 units		605 units
Townhouse	174 units				82 units	182 units	42 units	48 units	528 units
Retail		15,000 sf	600,000 sf	80,000 sf	5,000 sf	10,000 sf	15,000 sf	10,000 sf	735,000 sf
Total Residential Units	244 units			414 units	232 units	407 units	272 units	358 units	1,927 units

